
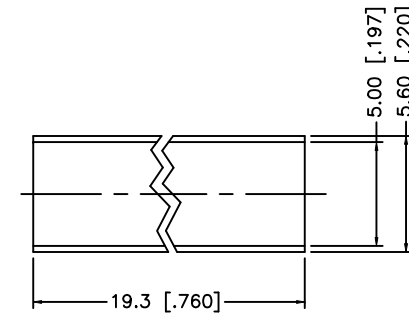

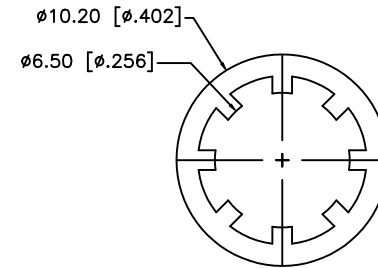


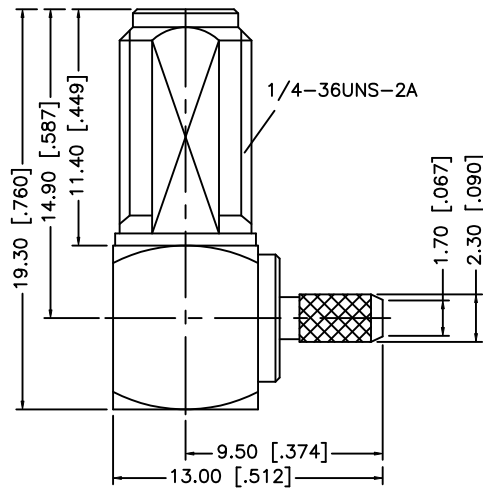
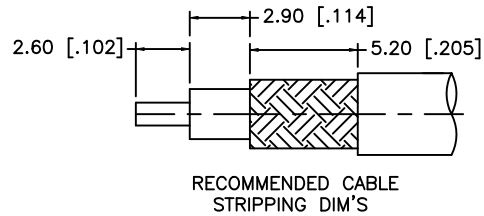


REV.	DATE	DESCRIPTION
NC	04/29/99	INITIAL RELEASE
A	04/02/08	UPDATE DRAWING FORMAT



NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .151"
2. CONTACT PIN TO SOLDER
3. MAX. PANEL THICKNESS = 3.2mm

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex							
8					DRAWN	G.R.S.	04/02/08									
7	HEAT SHRINK TUBE		1		CHECKED											
6	FERRULE	COPPER	GOLD		1	ISSUED				PART DESCRIPTION SMA R/A BULKHEAD JACK (FOR RG316 DOUBLE BRAID CABLE)						
5	HEX NUT	BRASS	GOLD		1	SHEET	1 OF 1									
4	LOCK WASHER	BRASS	GOLD		1											
3	CONTACT PIN	BER. COPPER	GOLD		1				PART NO. 132259							
2	INSULATOR	PTFE	NATURAL		1											
1	BODY	BRASS	GOLD	1												
				CAD FILE		C:/132/132259.DWG		DWG. NO.		132259.DWG	REV.	A	SIZE	A	SCALE	NA