
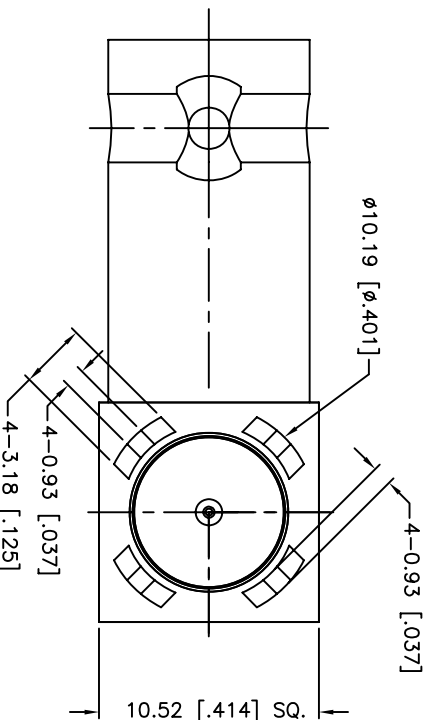
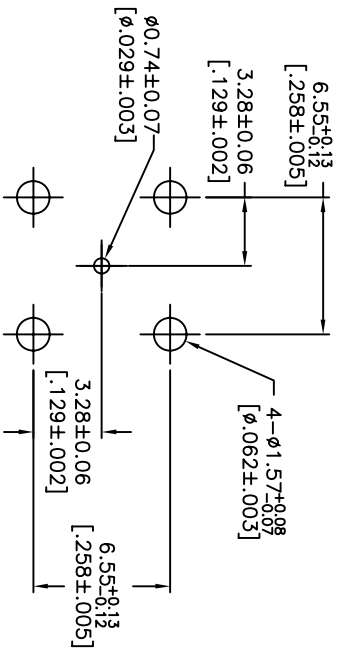
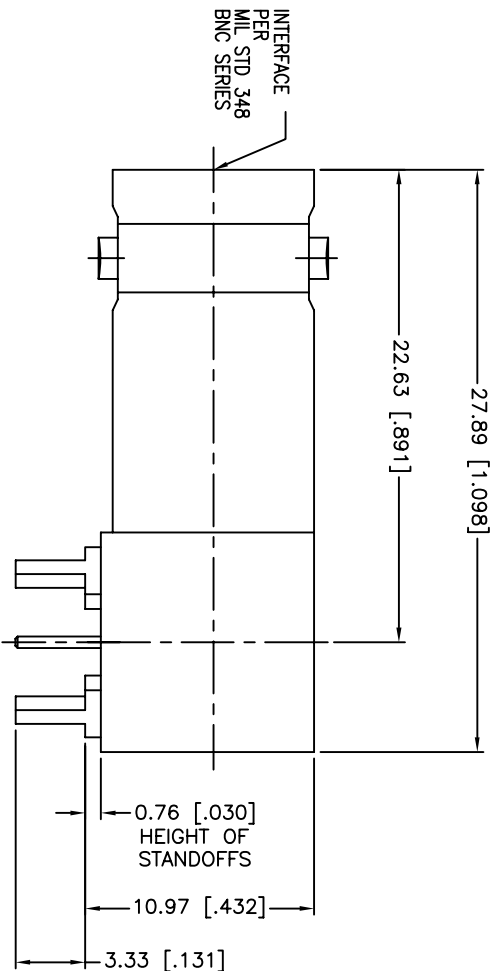


REV.	DATE	ECR NO.	DESCRIPTION
NC	03/06/10	XXXXXX	INITIAL RELEASE
A	06/18/10	2060	CHANG LEG THICKNESS TO FIT INTO BOARD .062"

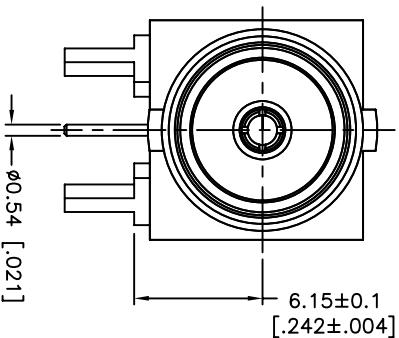

RECOMMENDED
PCB CONFIGURATION

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR MILLIMETERS ARE:

0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR INCHES ARE:

.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

5	LOCK RING	BRASS	NICKEL	1
4	INSULATOR	PTFE	NATURAL	1
3	CONTACT PIN	BER. COPPER	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

APPROVALS	DATE	PART DESCRIPTION
DRAWN M.ZHANG	06/18/10	BNC R/A JACK RECEPTACLE PCB MOUNT (75 OHM)
CHECKED		
ISSUED		
SHEET 1 OF 1		
CAD FILE C:/CONNEX/112778.DWG		
DWG. NO. 112778.DWG	REV. A	SIZE A
		SCALE NA

Amphenol Connex

1. FREQUENCY RANGE: DC-4 GHz
2. VSWR(RETURN LOSS): -28 dB