


ELFP SERIES PART NUMBERING SCHEME

REV	ECN	APPD
-	3600	JEC 12/11/98
A	3865	JEC 11/9/99
B	4686	IQ 1/2/02
C	4761	IQ 2/20/02
D	4821	IQ 4/4/02
E	5742	2W 12/28/05

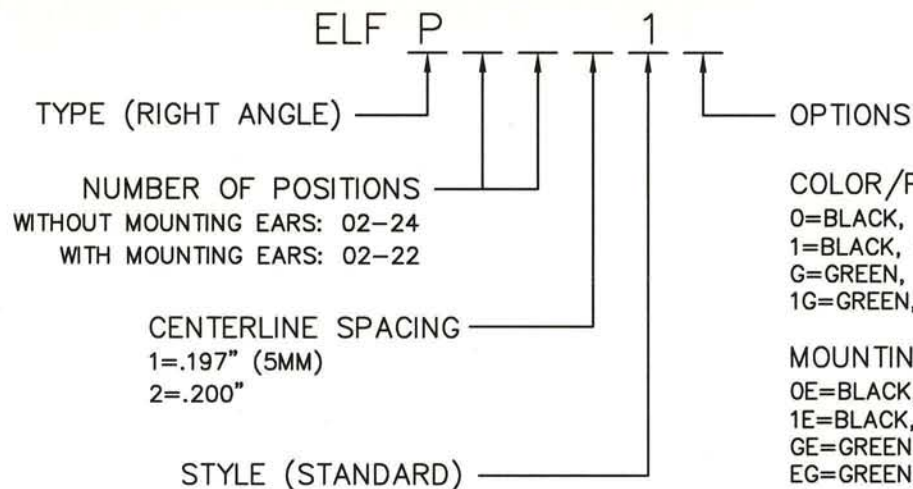

COLOR/PLATING

0=BLACK, TIN (STANDARD)

1=BLACK, SELECTIVE GOLD

G=GREEN, TIN

1G=GREEN, SEL. GOLD

MOUNTING EARS

0E=BLACK, TIN

1E=BLACK, SEL. GOLD

GE=GREEN, TIN

EG=GREEN, SEL. GOLD

CONSULT PCD FOR PART NO. AND AVAILABILITY OF FOLLOWING OPTIONS:

- * CUSTOM COLORS
- * CUSTOM MARKING
- * CUSTOM KEYING
- * SELECTIVE CONTACT LOADING

RATINGS

CURRENT - 15A

VOLTAGE - 300V

U.L. FILE NO. E83421

RATINGS

CURRENT - 15A

VOLTAGE - 300V

CSA FILE NO. LR69703

DIN VDE 0627:1986

DIN VDE 0110-1:1989

EN 60947-1:1991

EN 60947-7-1:1992

CURRENT - 15A

VOLTAGE - 300 V

TUV FILE NO. 20396

INSTALLATION RECOMMENDATIONS:

WIRE RANGE: AWG #14-26, STRANDED OR SOLID; AWG #12 STRANDED

WIRE STRIP LENGTH: .310"

TIGHTENING TORQUE: 7 LB-IN.

MATERIALS:

HOUSING: PPO, UL 94 V-0


CONTACT: COPPER ALLOY, OPTIONAL FINISH

SCREW: STEEL, NICKEL FINISH

WIRE CLAMP: COPPER ALLOY, NICKEL FINISH


OPERATING TEMPERATURE RANGE: -40°C-95°C

DIMENSIONS	TOLERANCES	PROJECTION	Amphenol Pcd SPECIFICATION DRAWING		TITLE ELFP SERIES PLUGGABLE TERMINAL BLOCK, RIGHT ANGLE				
ANSI Y14.5M	.XX ±.01		ENGR J. WILKINSON 11/8/98		SIZE A	DWG NO. ELFP02110		REV E	
UNITS: INCHES	.XXX ±.005		CHKD A. PATRIE 12/4/98						
ACAD FILE	ANGLES ±2°		APPD J. CAHALY 12/11/98						
ORIGINAL STAMPED IN RED	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD INC. PEABODY, MA				CODE: 58982		SCALE: NONE	SHEET 1 OF 2	


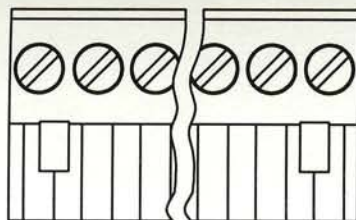


WITHOUT MOUNTING EARS

L=NUM OF POS X CL SPACING

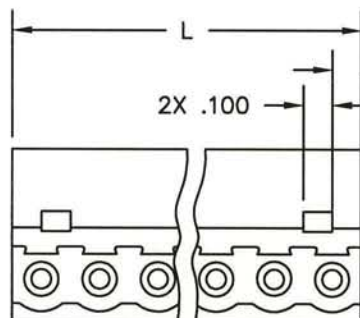


2X .100
2X .097 (.197 CL)
.100 (.200 CL)

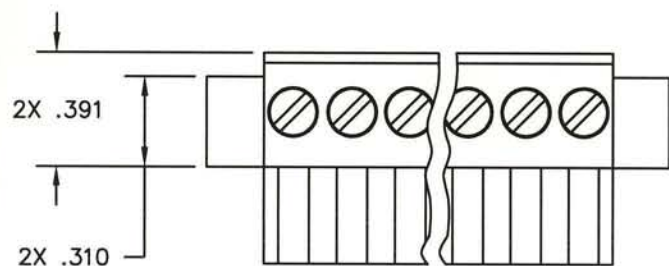


WITH MOUNTING EARS

L=NUM OF POS X CL SPACING

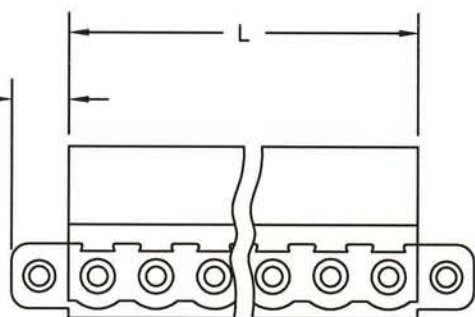

2X .196



SIZE	DWG NO.	REV
A	ELFP02110	E
CODE: 58982	SCALE: NONE	SHEET 2 OF 2