

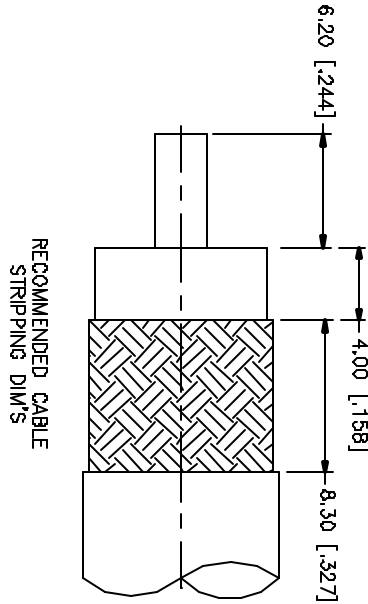
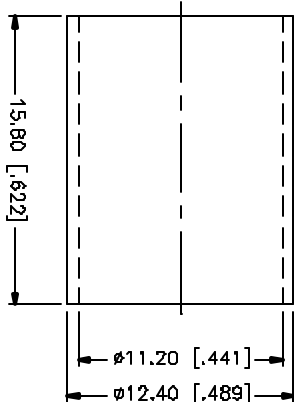


REV.	DATE	DESCRIPTION
NC	01/09/05	INITIAL RELEASE

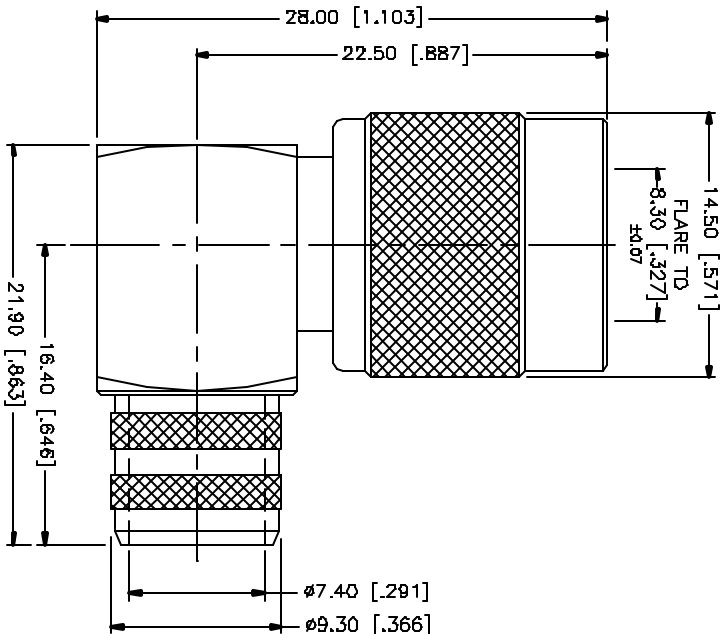

NOTES:
 1. CRIMPED FERRULE HEX SIZE .429"
 2. SOLDER CENTER CONTACT.

UNLESS OTHERWISE SPECIFIED, MEASUREMENTS ARE IN MILLIMETERS (DIMENSIONS IN INCHES ARE FOR REFERENCE ONLY). TOLERANCES FOR DIMENSIONS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR INCHES ARE: .020 - .315 ± 0.007" .315 - 1.180 ± 0.015" 1.180 - 4.724 ± 0.020"		APPROVALS		DATE		Amphenol Connex TNC R/A CRIMP PLUG (FOR RG-214/U CABLE) PART NO. 122503	
8		DRAWN	G.R.S.	01/09/05			
7		CHECKED					
5	COVER	BRASS	NICKEL	1			
4	FERRULE	COPPER	NICKEL	1			
3	CONTACT PIN	BRASS	GOLD	1			
2	INSULATOR	TEFLON	NATURAL	1			
1	BODY	BRASS	NICKEL	1			
DESCRIPTION		MATERIAL		FINISH		QTY	
						DO NOT SCALE DRAWING	
						C:/122/122503.DWG	
						DWG. NO. 122503.DWG	
						REV. NC	
						SIZE A	
						SCALE NA	