

1. MATERIALS AND FINISHES (PLATING THICKNESS IN MICRO-INCHES):

INSULATOR - PTFE

2. ELECTRICAL:

A. IMPEDANCE: 75 OHM

B. FREQUENCY RANGE: DC 0-1 GHz

C. VSWR(RETURN LOSS): 1.5 MAX.

D. DIELECTRIC WITHSTANDING VOLTAGE: 750 VRMS, MIN.

3. MECHANICAL:




A. DURABILITY: 500 CYCLES MIN.

B. TEMPERATURE RANGE: - 40°C to +155°C


CRIMPED FERRULE

HEX CRIMP SIZE .187"

CONTACT PIN TO SOLDER

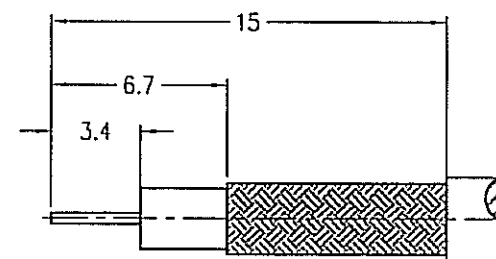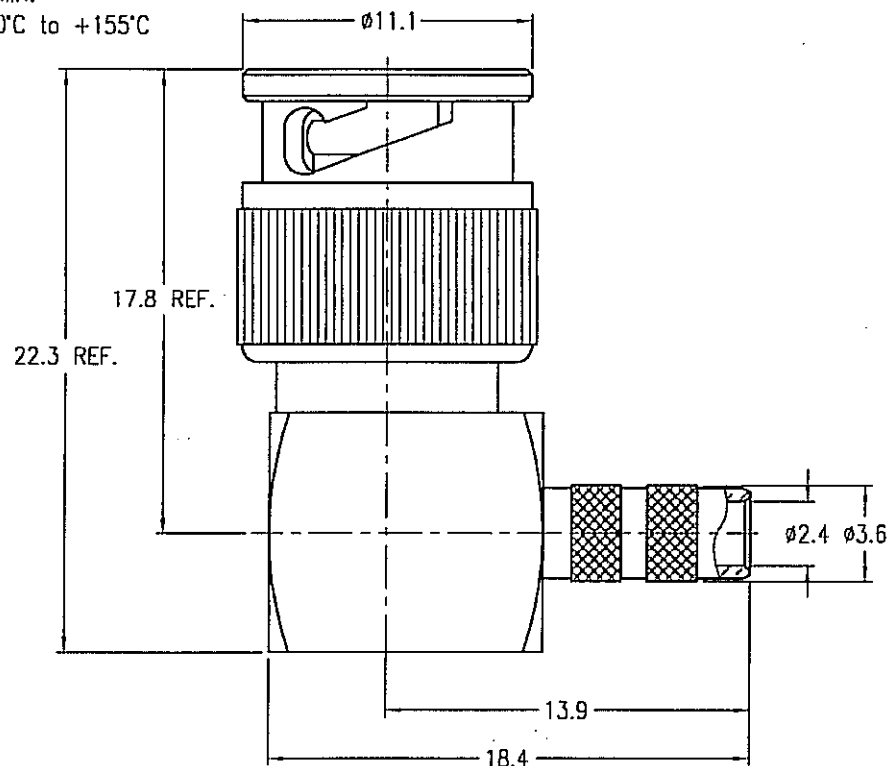

RECOMMENDED
CABLE STRIPPING DIM'S

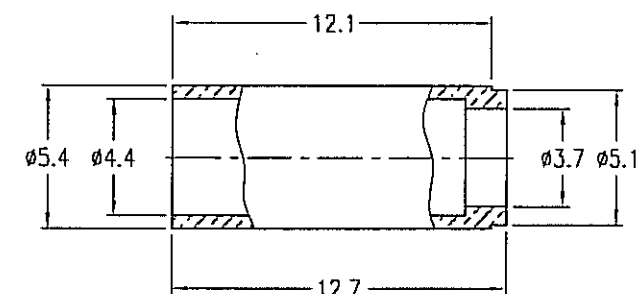

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

REFERENCE

FINISH

DRAWN
C/SSY

ENGINEER

APPROVED

CAD FILE

DATE
13-Jun-06

DATE _____

DATE .

125

TITLE

MINI BNC R/A CRIMP PLUG

SCALE: 3/1

DWG SIZE	
----------	--

100% 90% 80% 70% 60% 50% 40% 30% 20% 10% 0%

C R/A CRIMP PLUG

SHEET

CODE ID

Danbury CT USA, Tainan Taiwan, Shenzhen China
www.amphenorlf.com

DRAWING NO.

Amphenol RF

Danbury CT USA, Tainan Taiwan, Shenzhen China
www.amphenolrf.com

DRAWING NO. MNB1112A1-NT50G-735A-75

ST11ZAAA/JNE77