





REV.	DATE	DESCRIPTION
NC	05/16/05	INITIAL RELEASE

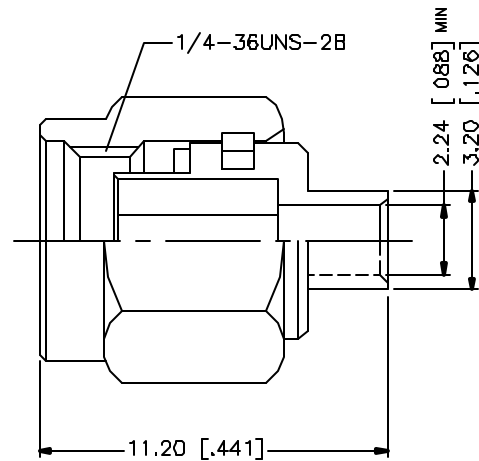

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.010" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex					
8						DRAWN	G.R.S.	05/16/05							
7						CHECKED				PART DESCRIPTION SMA REVERSE POLARITY SEMI-RIGID PLUG (FOR .085", .086" CABLE)					
6						ISSUED									
5						SHEET	1 OF 1				PART NO. 132101RP				
4	GASKET	SILKONE	RED	1											
3	CONTACT PIN	BRASS	GOLD	1						DWG. NO. 132101RP.DWG					
2	INSULATOR	TEFLON	NATURAL	1											
1	BODY	BRASS	GOLD	1						REV. NC		SIZE A		SCALE NA	
	DESCRIPTION	MATERIAL	FINISH	QTY	CAD FILE C:/132/132101RP.DWG										