
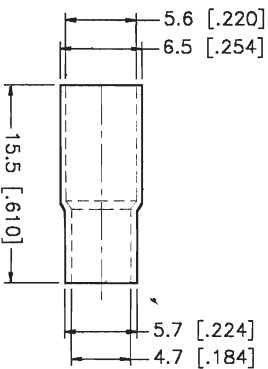
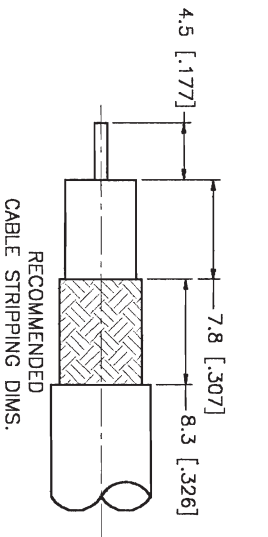



REV.	DATE	DESCRIPTION
A	02/03/99	CHANGE FERRULE AND BARREL DIMS
B	06/01/99	ADD CABLE DESCRIPTIONS

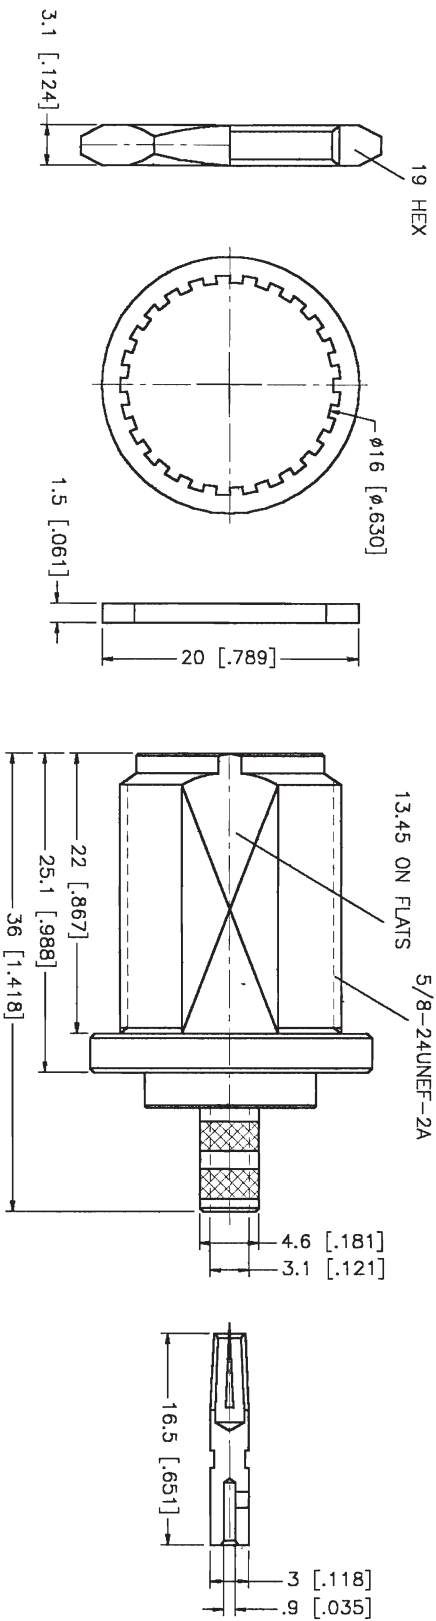

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE	TITLE
1 BODY	BRASS	NICKEL	DIMENSIONS IN [] ARE IN INCHES	DRAWN	G.R.S.	(FOR BELDEN 88240, B 89907, 58 PLENUM CABLE)
2 INSULATOR	TEFLON	NATURAL	FOR CUSTOMER REFERENCE ONLY	CHECKED		
3 CONTACT PIN	PHOS. BRONZE	GOLD	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:	ISSUED		
4 FERRULE	COPPER	NICKEL	0.5-6 = ± 0.2			
			8-30 = ± 0.4			
			30-120 = ± 0.6			
			120-315 = ± 1			
			315-1000 = ± 1.6			
			1000-2000 = ± 2.4			
8			DO NOT SCALE DRAWING			

Amphenol Connex

N BULKHEAD CRIMP JACK
(FOR BELDEN 88240, B 89907, 58 PLENUM CABLE)

SIZE FSCM NO. 99001 DWG. NO. 172192.DWG REV. B

SCALE NA PART NO. 172192 SHEET 1 OF 1