


REV.	DATE	DESCRIPTION
NC	02/28/03	INITIAL RELEASE

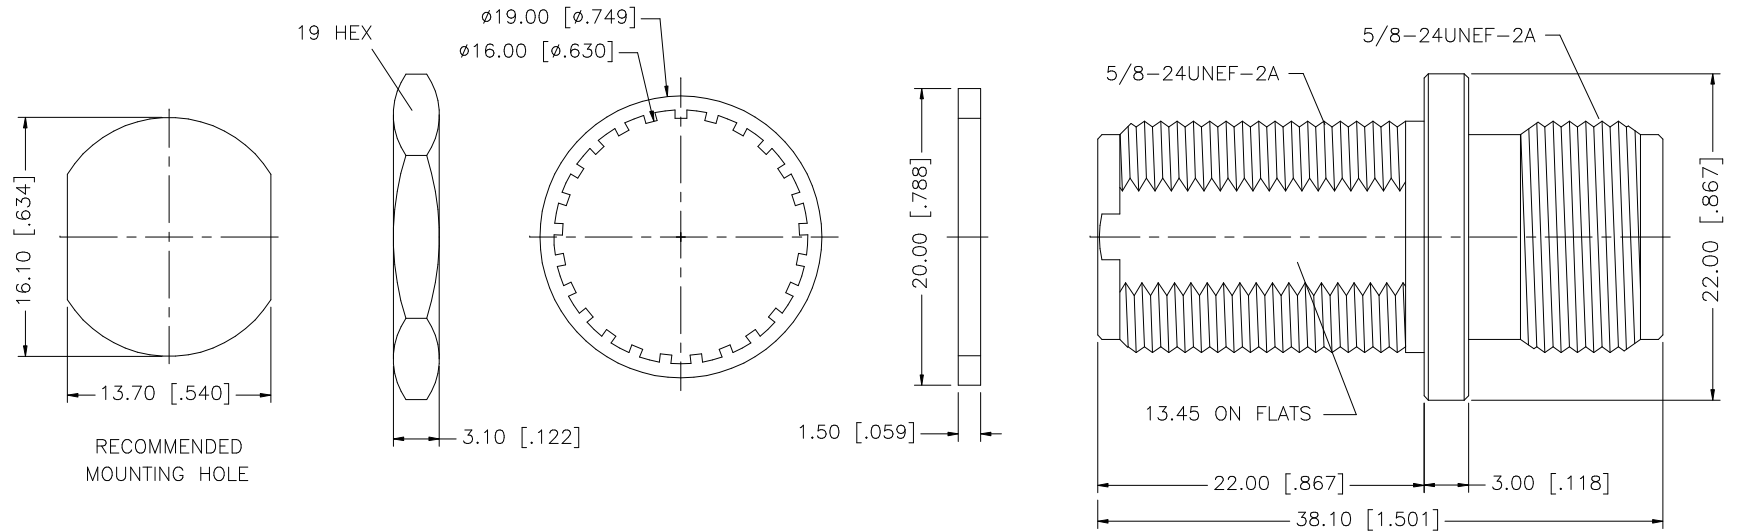

NOTE:

1. MAX. PANEL THICKNESS = 6.5mm [.255"]

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex							
8						DRAWN	G.R.S.					02/28/03			
7						CHECKED									
6	HEX NUT	BRASS	NEXCOTE	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	ISSUED		PART DESCRIPTION							
5	LOCK WASHER	BRASS	NEXCOTE	1				N JACK TO JACK BULKHEAD ADAPTER							
4	GASKET	SILICONE	RED	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	SHEET	1 OF 1		PART NO.						
3	CONTACT PIN	PHOS. BRONZE	GOLD	1					172124						
2	INSULATOR	TEFLON	NATURAL	1											
1	HOUSING/BODY	BRASS	NEXCOTE	1											
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	C:/172/172124.DWG	DWG. NO.	172124.DWG	REV.	NC	SIZE	A	SCALE	NA