
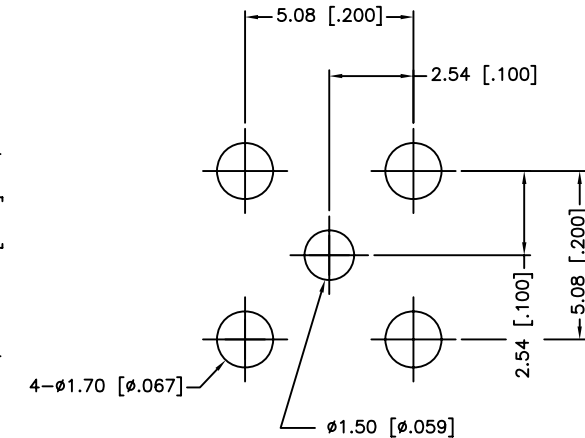
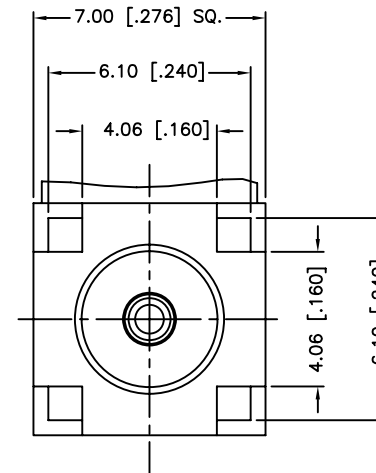


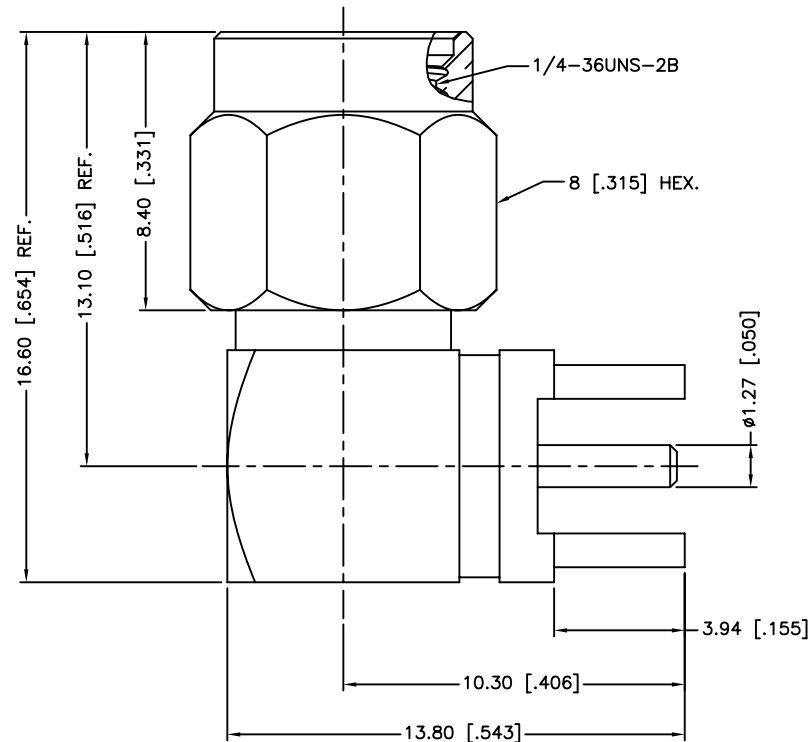

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC 0—18 GHZ
3. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
4. DURABILITY: 500 CYCLES MIN.
5. TEMPERATURE RANGE: -65°C TO +165°C

9	CONTACT PIN	BRASS	GOLD	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	APPROVALS	DATE	Amphenol Connex							
8	INSULATOR	PTFE	NATURAL	1		DRAWN	M.ZHANG								04/16/12
7	COVER	BRASS	GOLD	1		CHECKED			PART DESCRIPTION SMA REVERSE POLARITY R/A P.C.B PLUG						
6	HOUSING WITH BODY	BRASS	GOLD	1		ISSUED									
5	CONTACT PIN	BERYLLIUM COPPER	GOLD	1		SHEET	1 OF 1		PART NO. 132135RP						
4	INSULATOR	PTFE	NATURAL	1											
3	RETAINER RING	SUS 304	NATURAL	1		CAD FILE	C:/CONNEX/132135RP.DWG		DWG. NO.	132135RP.DWG	REV.	NC	SIZE	A	SCALE
2	GASKET	SILICON RUBBER	RED	1	DO NOT SCALE DRAWING										
1	SHELL	BRASS	GOLD	1											
	DESCRIPTION	MATERIAL	FINISH	QTY											