


REV.	DATE	DESCRIPTION
NC	11/26/03	INITIAL RELEASE

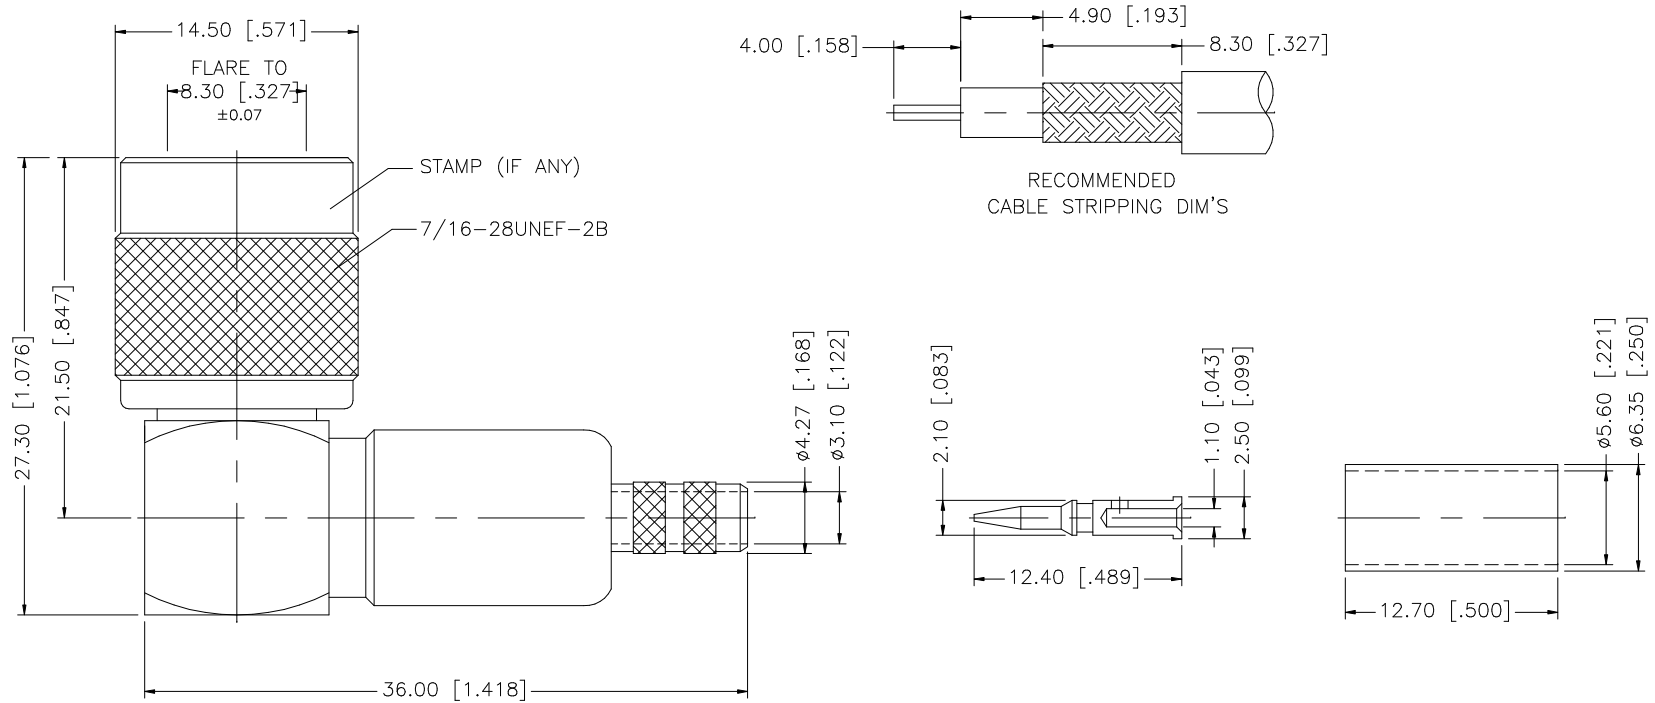

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
8						DRAWN	G.R.S.	11/26/03						
7						CHECKED								
6											PART DESCRIPTION			
5											TNC R/A CRIMP PLUG (FOR RG–55/U, 142A/U, 223/U, 400/U)			
4	FERRULE	COPPER	NICKEL	1							PART NO. 122365			
3	CONTACT PIN	PHOS. BRONZE	GOLD	1					1 OF 1					
2	INSULATOR	DELRIN	NATURAL	1										
1	HOUSING/BODY	BRASS	NICKEL	1										
DESCRIPTION					MATERIAL	FINISH	QTY	CAD FILE C:/122/122365.DWG		DWG. NO. 122365.DWG		REV. NC	SIZE A	SCALE NA