

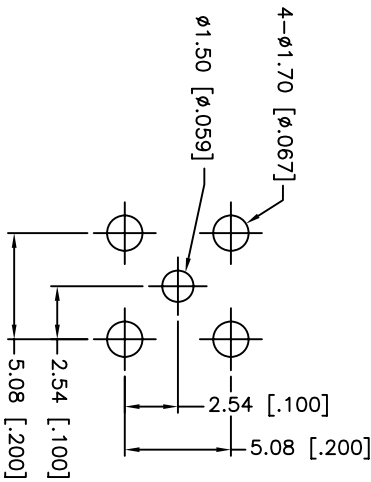




REV.	DATE	ECR NO.	DESCRIPTION
NC	10/13/10	XXXXXX	INITIAL RELEASE

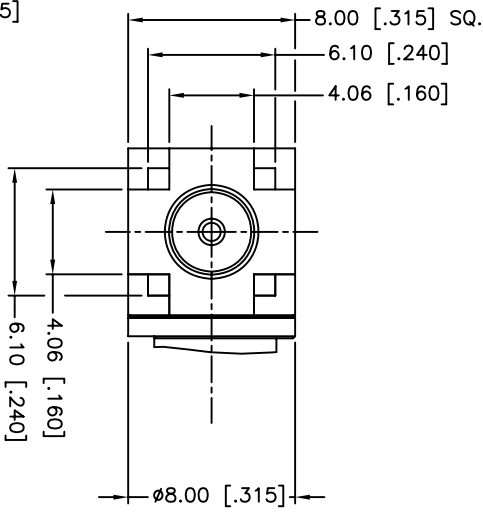

PCB MOUNTING HOLE

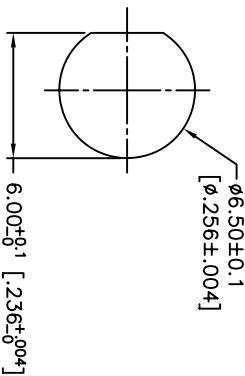

RECOMMENDED
MOUNTING HOLE

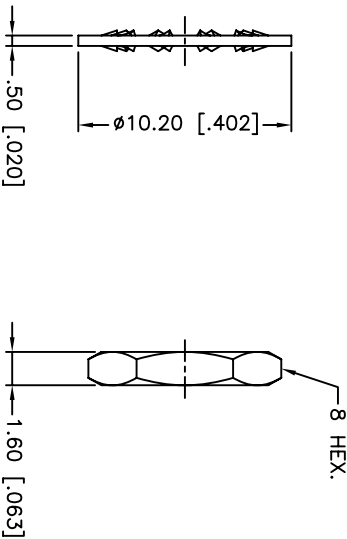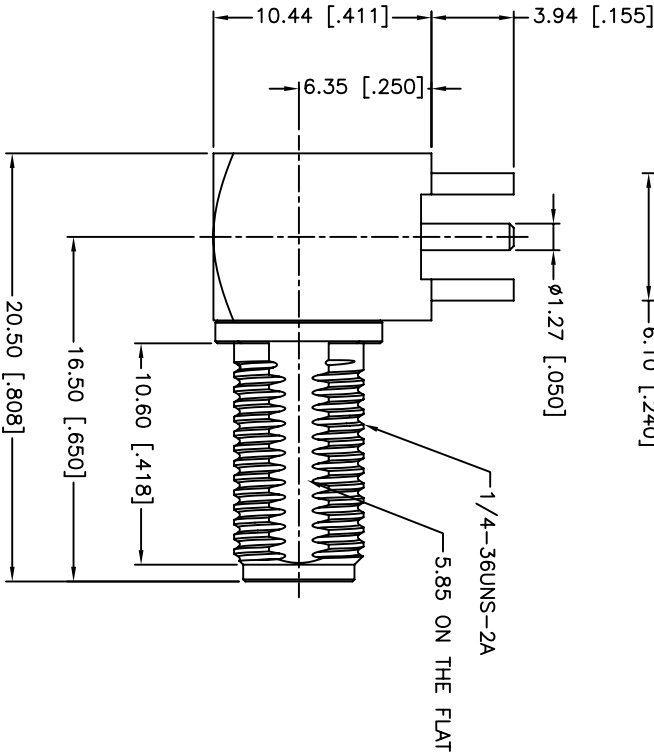

8 HEX.

1. MAX. PANEL THICKNESS=2.4 MM

9	HEX NUT	BRASS	NEXCOTE	1	UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS DATE	DWG. NO. 1 32203SS.DWG REV. NC SIZE A SCALE NA			
8	LOCK WASHER	BRASS	NEXCOTE	1						
7	BODY	STAINLESS STEEL	NEXCOTE	1						
6	INSULATOR	PTFE	NATURAL	1						
5	CONTACT PIN	BER. COPPER	GOLD	1						
4	COVER	STAINLESS STEEL	GOLD	1						
3	CONTACT PIN	BRASS	GOLD	1						
2	INSULATOR	PTFE	NATURAL	1						
1	HOUSING	STAINLESS STEEL	GOLD	1						
DESCRIPTION					QTY					
DO NOT SCALE DRAWING					C:\CONNEX\132203SS.DWG					
C:\CONNEX\132203SS.DWG					PART NO.					
1 32203SS					SMA R/A BULKHEAD P.C. MOUNT JACK					
SHEET 1 OF 1					PART DESCRIPTION					
DRAWN M.ZHANG					10/13/10					
CHECKED										
ISSUED										

Amphenol Connex

SMA R/A BULKHEAD P.C. MOUNT JACK

132203SS