

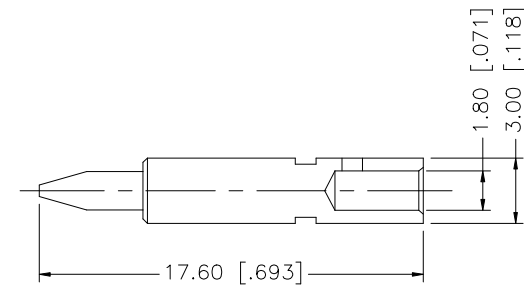


REV.	DATE	DESCRIPTION
A	04/31/03	UPDATE DRAWING FORMAT

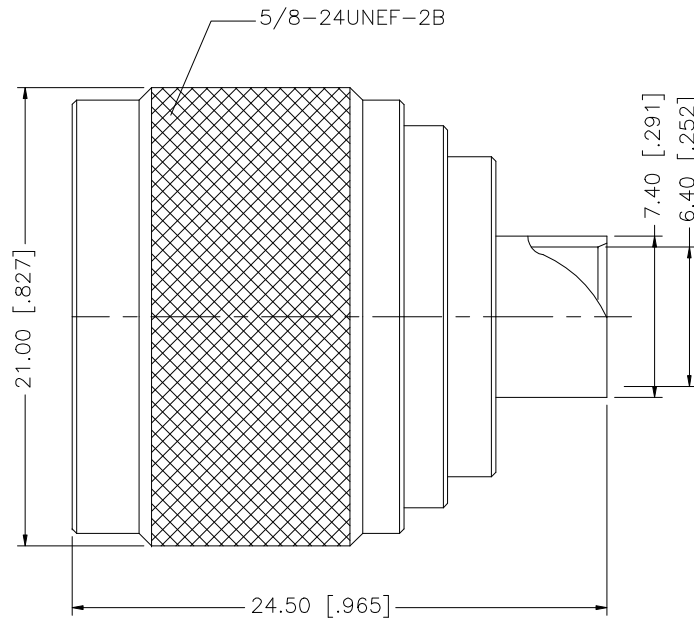

RECOMMENDED
CABLE STRIPPING DIM'S

NOTE:

1. CRIMPED CONTACT PIN
HEX CRIMP SIZE .100"
OR SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex N DIRECT SOLDER PLUG (.250” SEMI-RIGID CABLE)					
8						DRAWN	G.R.S.						04/31/03
7						CHECKED							
6						ISSUED			PART DESCRIPTION				
5						SHEET	1 OF 1		PART NO.				
4	COUPLING NUT	BRASS	NEXCOTE	1				172139					
3	BODY	BRASS	GOLD	1				DWG. NO.					
2	CONTACT PIN	BRASS	GOLD	1				172139.DWG					
1	INSULATOR	TEFLON	NATURAL	1				REV. A					
	DESCRIPTION	MATERIAL	FINISH	QTY				SIZE A					
								SCALE NA					