

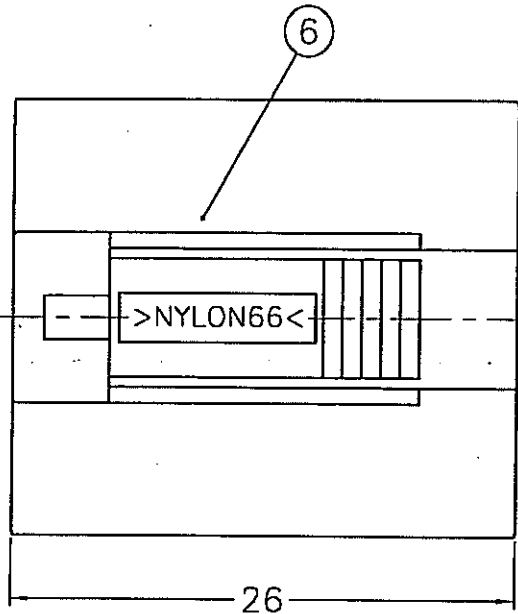


REVISIONS			
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE	
H	C-5	ADD 4 ROUND RIBS ON CLIP, FKLC00001B WAS FKLC00001A \RD-DM06032401B\ 24-Mar-06	
H1	C-5	ADDED: ± 0.20 , REMOVED 8mm\ECO\8-05-06'	
H2	C-7	ADDED PPAP QUALIFIED \ECO 45992\6-07-06'	

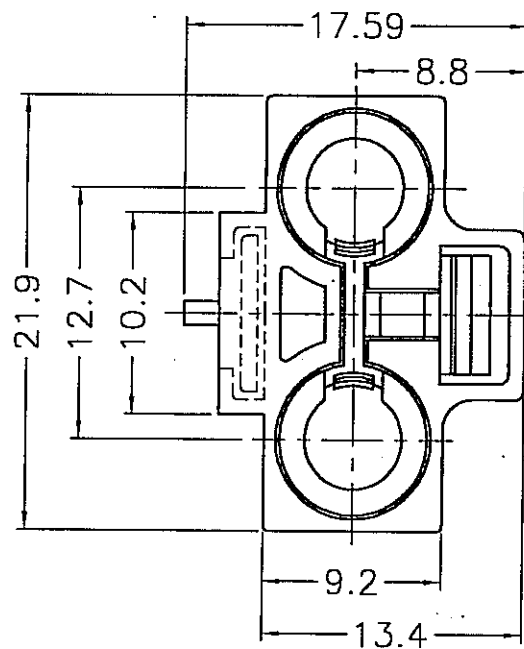


DATE MARK
(日期記號)

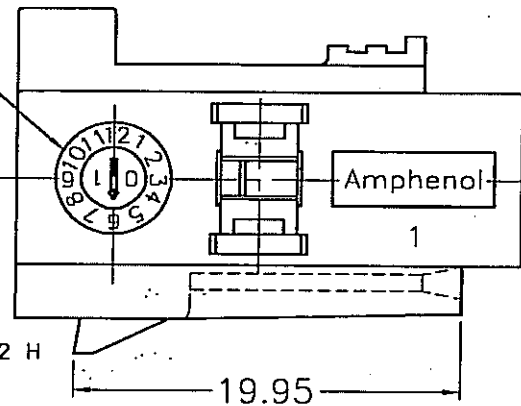


NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626, ALLOY 360, 1/2 H ; JIS H3250 C 3604BD OR EQUIVALENT
2. BERYLLIUM COPPER PER QQ-C-530, ALLOY 173, 1/2 H ; FUJII FX301 OR EQUIVALENT
3. NICKEL PL. 60 MIN. THICK OVER COPPER STRIKE
4. GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
5. TEFLON MIL-P-19468 OR EQUIVALENT
6. COPPER PER ASTM B-75 ALLOY C12200 OR EQUIVALENT
7. NYLOY66(WITH 33% GLASS FIBER) PER NYTEX COMPOSITES CO., LTD. GRADE MG-0033N-V0 OR EQUIVALENT
8. PBT(WITH 15% GLASS FIBER) PER CHANG CHUN GRADE 4115202

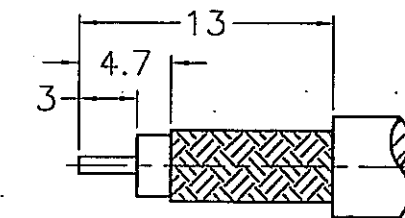

1. CRIMPED FERRULE
HEX. CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
SQ. CRIMP SIZE .042"


RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

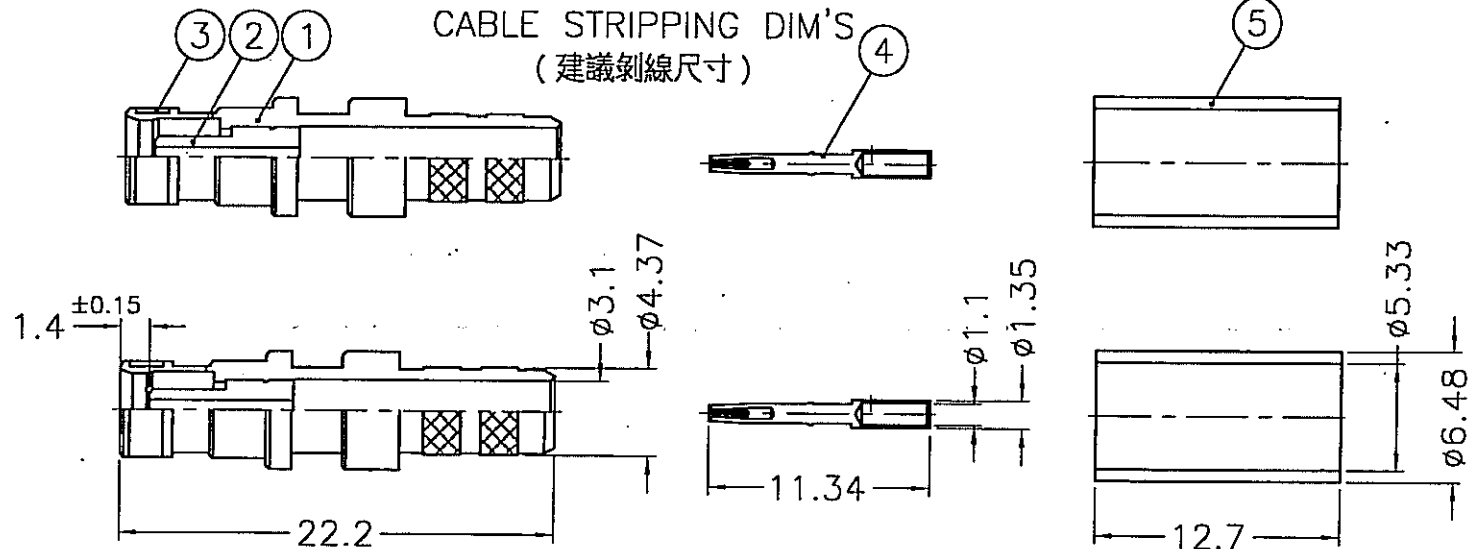

CONFIGURATION CONTROL:
NO CHANGES PERMITTED TO DRAWING WITHOUT
PPAP QUALIFIED CUSTOMER APPROVAL

TABLE

KEY CODING	PART NO.	DRAWING NO.	ITEM NO.	LOCK COVER
A	FA2-NASJ-C04-6	FKT6121AW-010-NT30G-50	FK7121ABA57NC5F	FKLC20701B
B	FA2-NBSJ-C04-6	FKT6121BW-010-NT30G-50	FK7121ABB57NC5F	FKLC20702B
C	FA2-NCSJ-C04-6	FKT6121CW-010-NT30G-50	FK7121ABC57NC5F	FKLC20703B
D	FA2-NDSJ-C04-6	FKT6121DW-010-NT30G-50	FK7121ABD57NC5F	FKLC20704B
E	FA2-NESJ-C04-6	FKT6121EW-010-NT30G-50	FK7121ABE57NC5F	FKLC20705B
F	FA2-NFSJ-C04-6	FKT6121FW-010-NT30G-50	FK7121ABF57NC5F	FKLC20706B
G	FA2-NGSJ-C04-6	FKT6121GW-010-NT30G-50	FK7121ABG57NC5F	FKLC20707B
H	FA2-NHSJ-C04-6	FKT6121HW-010-NT30G-50	FK7121ABH57NC5F	FKLC20708B
I	FA2-NISJ-C04-6	FKT6121IW-010-NT30G-50	FK7121ABI57NC5F	FKLC20709B
K	FA2-NKSJ-C04-6	FKT6121KW-010-NT30G-50	FK7121ABK57NC5F	FKLC20710B
Z	FA2-NZSJ-C04-6	FKT6121ZW-010-NT30G-50	FK7121ABZ57NC5F	FKLC20711B

7	LOCK COVER	NOTE 8	NATURAL	2	FKLC00001B	DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4				PART NO. FA2-NXSJ-C04-6		Amphenol Danbury,CT,USA-Tainan,Taiwan-Shenzhen,China		
6	LOCK COVER	NOTE 7		1	SEE TABLE					APPROVED 	DATE 06-Jul-06			TITLE FAKRA TWIN SMB CRIMP JACK W/180° DELPHI CLIP (FOR RG-58A/U, 58C/U CABLE)
5	FERRULE	NOTE 6	NOTE 3	2	FKFR00201A					CHECKED 	DATE 06-Jul-06			DRAWING NO. FKT6121XX-010-NT30G-50
4	CONTACT PIN	NOTE 2	NOTE 4	2	FKCP00401A					DRAWN 	DATE 06-Jul-06			ITEM NO. FK7121ABX57NC5F
3	RETAINER RING	NOTE 2	NATURAL	2	FKRR00101A									
2	INSULATOR	NOTE 5	NATURAL	2	FKNS00501A									
1	BODY	NOTE 1	NOTE 3	2	FKBD00501A									
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	2/1	ISSUE	H2	FILE NO. F:\DWG\FKT\6121XX\010\50\NT30G-H2SZ				