





REV.	DATE	DESCRIPTION
A	01/09/98	ADD CONTACT PIN/ CHANGE I.D./ REDIMENSION
B	01/26/02	ADD CROSS SECTION OF BODY
C	07/22/02	INCREASE BODY LENGTH TO 11.20
D	05/14/03	UPDATE DRAWING FORMAT

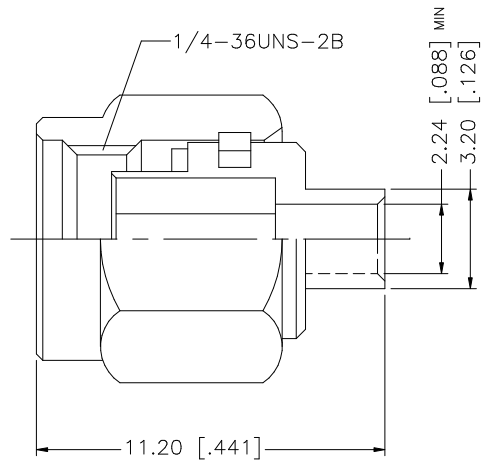

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex					
7						DRAWN	G.R.S.						05/14/03
6						CHECKED							
5						ISSUED			PART DESCRIPTION				
4	GASKET	SILICONE	RED	1					SMA SEMI-RIGID PLUG (FOR .085", .086" CABLE)				
3	CONTACT PIN	BRASS	GOLD	1				PART NO.					
2	INSULATOR	TEFLON	NATURAL	1				132101					
1	BODY	BRASS	GOLD	1									
DESCRIPTION					MATERIAL	FINISH	QTY	CAD FILE	DWG. NO.		REV.	SIZE	SCALE
								C:/132/132101.DWG	132101.DWG		NC	A	NA