

LGK M^{PAT.}

Mini Grounding Kits

GROUNDING KITS
PRODUCT CATALOGUE



MATERIAL	
Shell	AISI 304 Stainless Steel
Gasket	EPDM Rubber U.V. Resistant
Inner Contact	Copper
Cable**	10 mm ² Copper, Black PVC Insula- ted, Conforming to CEI 20-22 Norms (Yellow/Green on Request)
Lug	Tinned Copper, ø 8 Hole (* ø10 on re- quest)

LGK M - Mini Grounding Kit
For Copper or Aluminum RG and RF Coaxial
Cables. Parallel Cable Exit

Technical features:


- Compact structure
- Fast and easy installation
- Closure with a single screw
- Rigid shell
- No loose parts
- No extra taping needed

LGK M - Mini Kit di Messa a Terra
*Per Cavi Coassiali RG e RF, in Rame o Allu-
minio.*
Uscita Parallela

Caratteristiche:

- *Struttura compatta*
- *Installazione veloce*
- *Chiusura con singola vite*
- *Gusci rigidi*
- *Senza parti sciolte*
- *Nastratura supplementare non neces-
saria*

CERTIFICATION	
IEC 60529	Waterproof IP 68
Enviromental Test	IEC 68-2-14
Contact Resistance	<1 mOhm
Corrision Resistent	✓

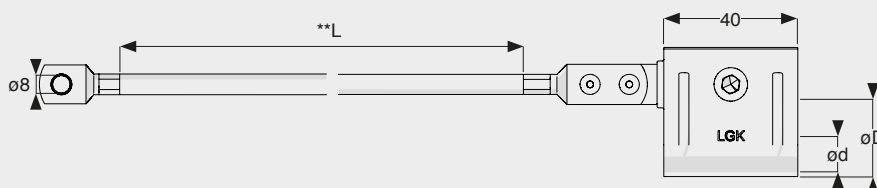

CODE	ARTICLE	FOR COAXIAL CABLES	øD	**L	BOX	WEIGHT
61 1509 0006	LGK 6 M	ø d 5 - 6 (RG 223-RG 58)	21	500	10	131
61 1509 0007	LGK 7 M	ø d 6 - 7 (RG59)	21	500	10	129
61 1509 0009	LGK 9 M	ø d 8 - 9 (1/4")	21	500	10	127
61 1509 0011	LGK 11 M	ø d 10 - 11 (RG 213/214-1/4"-3/8" superflex)	21	500	10	125