
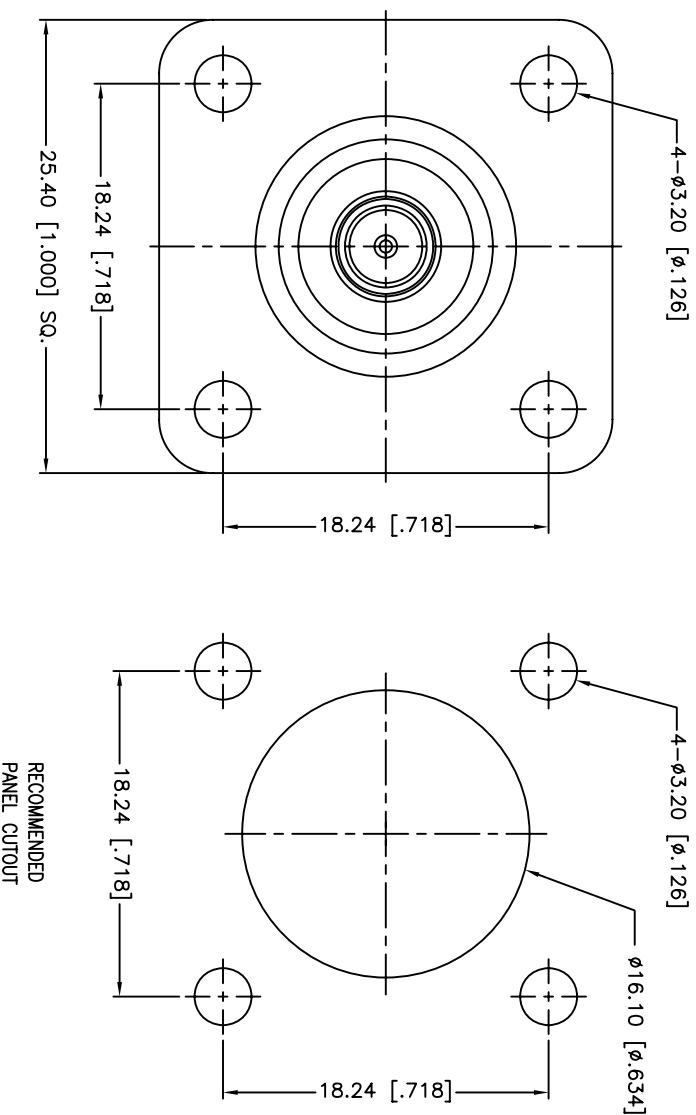


REV.	DATE	ECR NO.	DESCRIPTION
NC	09/22/02	XXXXXX	INITIAL RELEASE
A	11/29/11	2260	ADD NOTES
B	12/21/11	2268	ADD RECOMMENDED PANEL CUTOUT

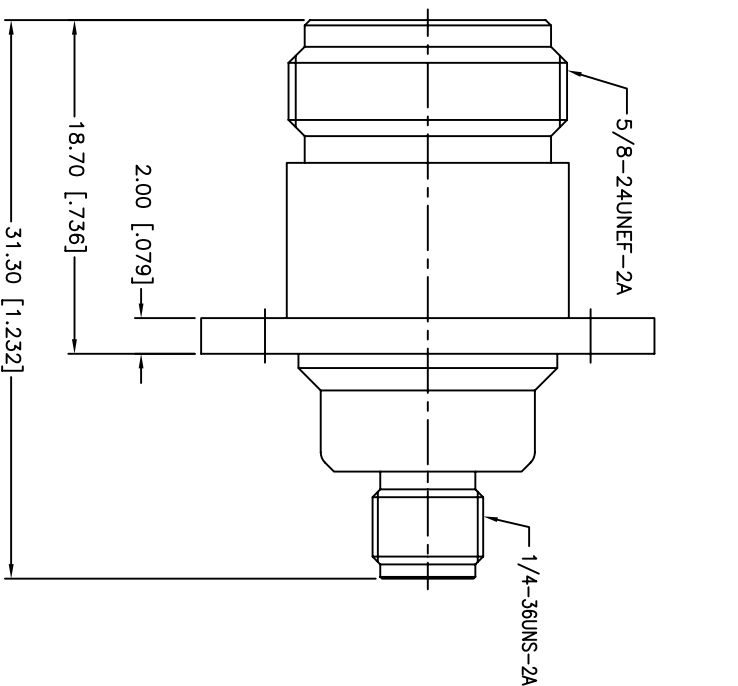

1. IMPEDANCE:50 OHM
2. FREQUENCY RANGE: 0-11 GHz
3. DIELECTRIC WITHSTANDING VOLTAGE:1000 VRMS. MIN.
4. DURABILITY:500 CYCLES. MIN.
5. TEMPERATURE RANGE:-65°C TO +165°C
6. CONTACT PIN MUST WITHSTAND 6 LBS. MIN. PULL FORCES.

4	BODY	BRASS	NICKEL	1
3	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY WITH PANEL	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS (INCHES) AND FOR CUSTOMER REFERENCE ONLY.				
APPROVALS		DATE		
DRAWN	M.ZHANG	12/21/11		
UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR MILLIMETERS ARE:				
0.5 - 8mm ± 0.20mm				
8 - 30mm ± 0.40mm				
30 - 120mm ± 0.50mm				
UNLESS OTHERWISE SPECIFIED, TOLERANCES FOR INCHES ARE:				
.020 - .315 = ± 0.007"				
.315 - 1.180 = ± 0.015"				
1.180 - 4.724 = ± 0.020"				
DO NOT SCALE DRAWING				
CAD FILE		C:/CONNEX/242163.DWG		
SHEET		1 OF 1		
PART NO.		242163		
DWG. NO.		242163.DWG		
REV.		B	SIZE	A
SCALE		NA		
Amphenol Connex				
N JACK TO SMA JACK PANEL ADAPTER				