
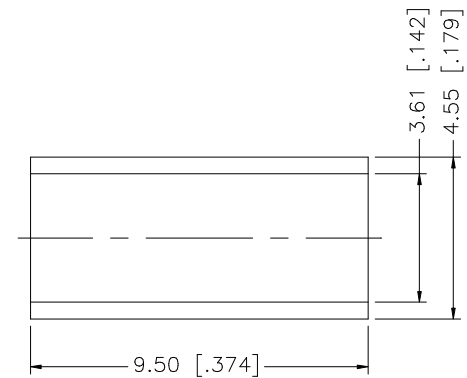
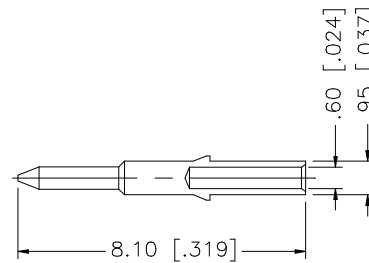
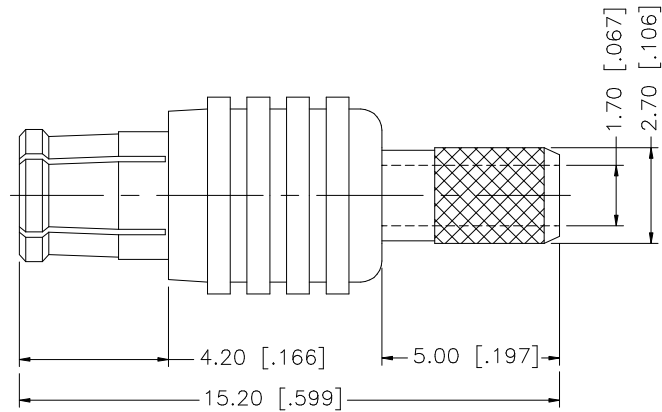


REV.	DATE	DESCRIPTION
A	01/13/99	ADD CRIMP NOTES / CHANGE FERRULE DIMS.
B	07/20/05	UPDATE DRAWING FORMAT
C	10/31/05	MODIFY CRIMP NOTES
D	02/15/07	REVISE BARREL O.D. , FERRULE DIA.

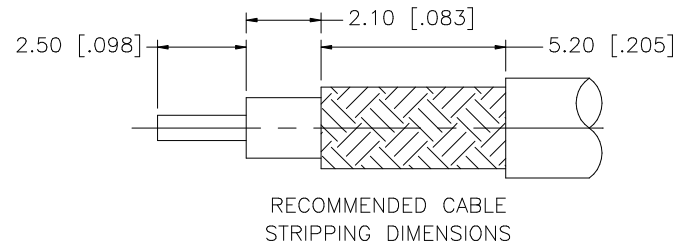

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .151"
2. CRIMPED CONTACT PIN SQ. CRIMP SIZE 0.7(Mmm)

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
8						DRAWN	G.R.S.	02/15/07						
7						CHECKED								
6						PART DESCRIPTION								
5	FERRULE	COPPER	GOLD	1		MCX STRAIGHT CRIMP PLUG – GOLD (FOR RG-316/U DOUBLE BRAID)								
4	CONTACT PIN	BRASS	GOLD	1		PART NO.								
3	INSULATOR	TEFLON	NATURAL	1		252121								
2	BODY	BER. COPPER	GOLD	1		DWG. NO.								
1	HOUSING	BRASS	GOLD	1		252121.DWG								
	DESCRIPTION	MATERIAL	FINISH	QTY		CAD FILE		C:/252/252121.DWG		REV.	D	SIZE	A	SCALE