


REV.	DATE	DESCRIPTION
NC	05/20/02	INITIAL RELEASE
A	04/11/06	UPDATE DRAWING FORMAT

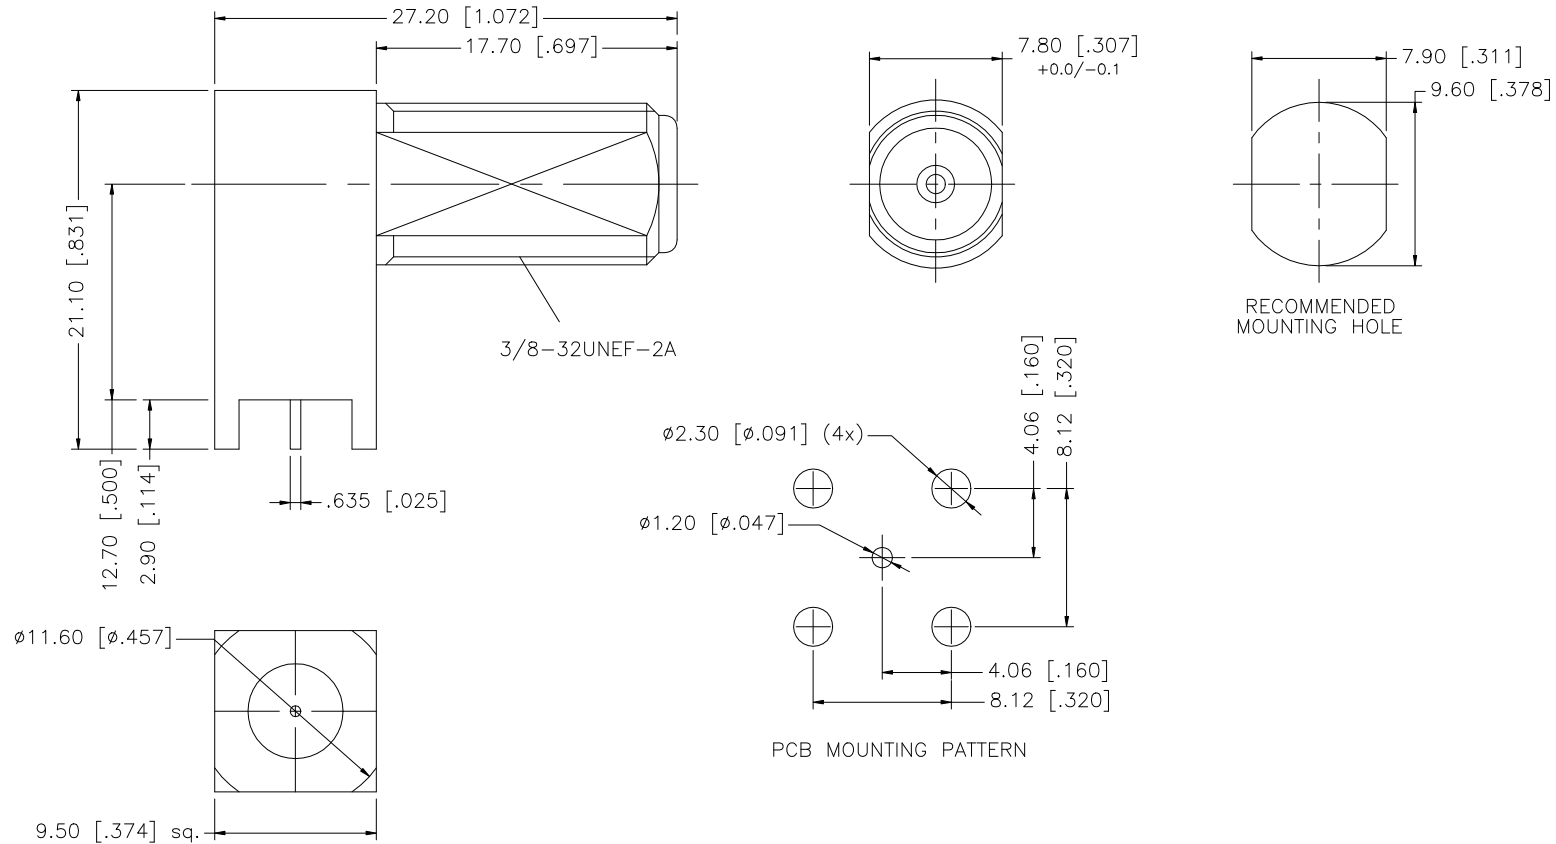

NOTES;

1. ACCEPTS Ø0.5~1.05 CENTER CONDUCTOR TYPICAL.
2. RETURN LOSS -15db MIN. AT 2 GHz.
3. BRT. TIN (90/100) PL. 100 MIN. THICK
OVER NICKEL PL. 50 MIN.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex									
8						DRAWN	G.R.S.	04/11/06											
7						CHECKED													
6	INSULATOR	TEFLON	NATURAL	1			ISSUED				PART DESCRIPTION								
5	CONTACT PIN	BRASS	GOLD	1			SHEET	1 OF 1			F R/A PC MOUNT RECEPTACLE (HIGH PERFORMANCE)								
4	INSULATOR	TEFLON	NATURAL	1							PART NO.								
3	CONTACT PIN	BER. COPPER	GOLD	1							222180								
2	INSULATOR	TEFLON	BRT. TIN	1							DWG. NO.		222180.DWG		REV.	A	SIZE	A	SCALE
1	BODY	BRASS	BRT. TIN	1															
DESCRIPTION					MATERIAL	FINISH	QTY			CAD FILE		C:/222/1222180.DWG							