


REV.	DATE	ECR NO.	DESCRIPTION
NC	06/11/09	XXXXXX	INITIAL RELEASE

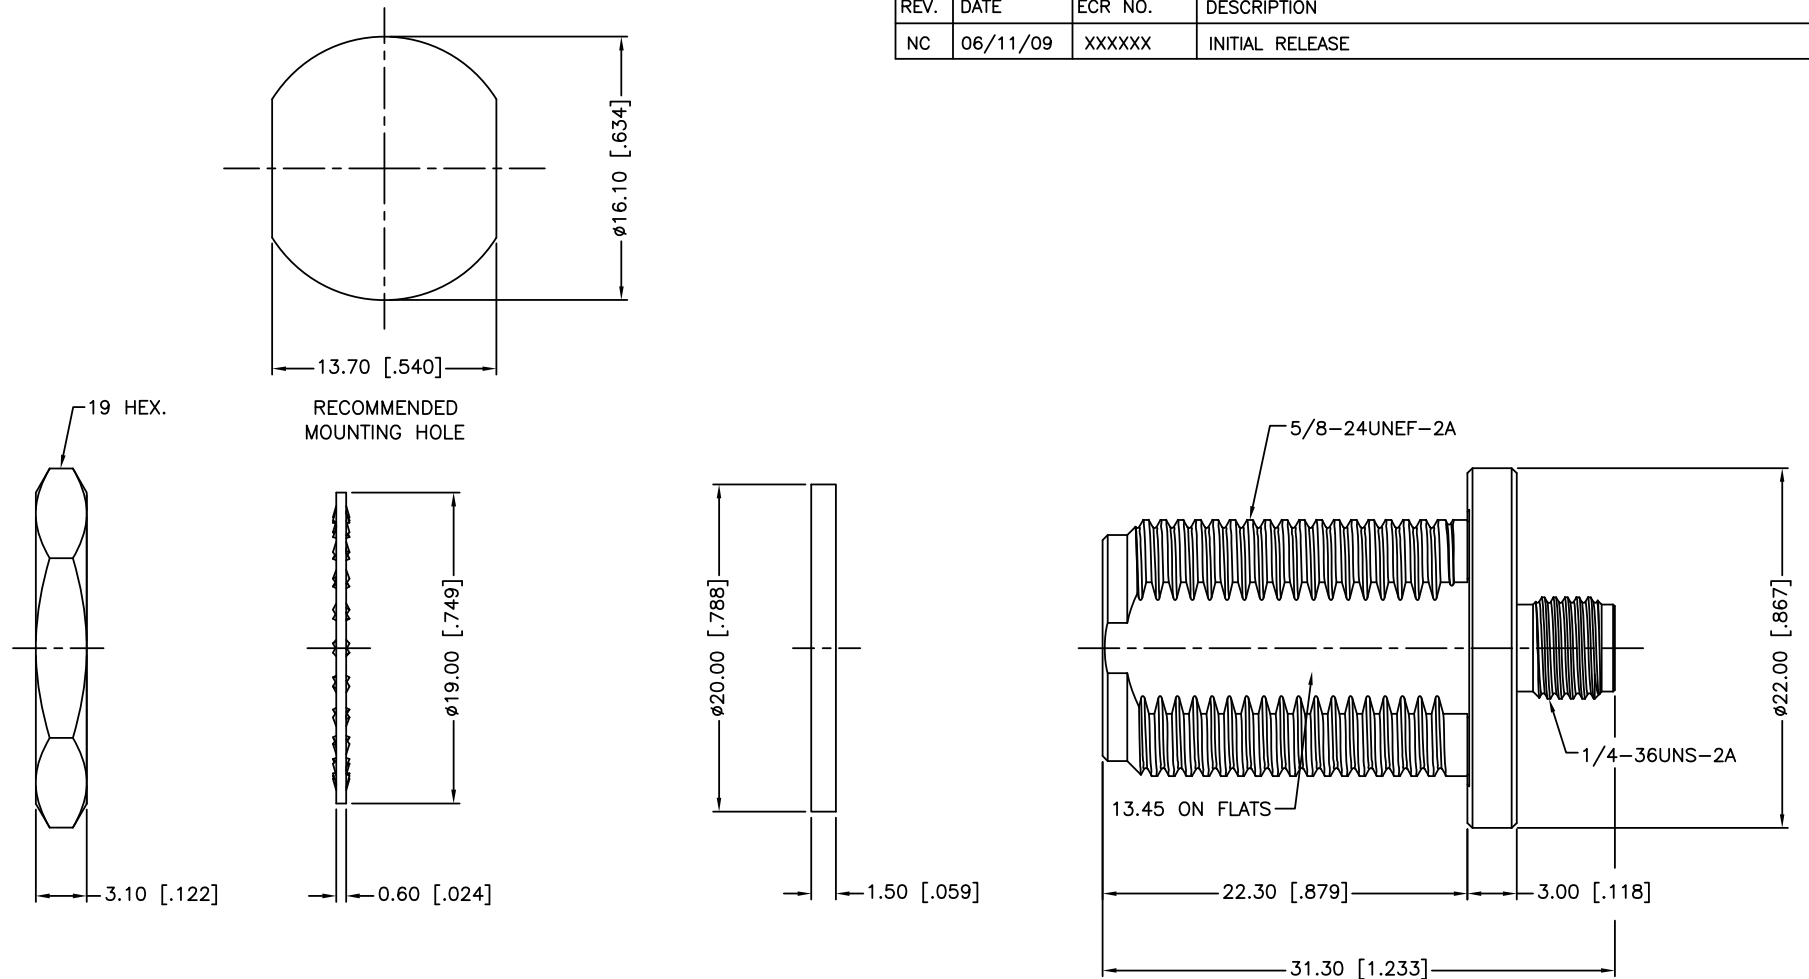

1. SEALING REQUIREMENT: IP-68 MUST WITHSTAND 3' DEPTH OF WATER FOR ONE HOUR WITHOUT ANY SIGNS OF LEAKAGE
2. MAX. PANEL THICKNESS= 6.8mm

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex									
8	HEX NUT	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm		DRAWN	M.ZHANG	06/11/09											
7	LOCK WASHER	BRASS	NICKEL	1			CHECKED													
6	GASKET	SILICONE	RED	1			ISSUED													
5	HOUSING	BRASS	NICKEL	1			SHEET	1 OF 1												
4	CONTACT PIN	BER. COPPER	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”					PART DESCRIPTION										
3	O-RING	SILICONE	RED	1						N FEMALE TO SMA FEMALE BULKHEAD ADAPTOR (IP 68)										
2	INSULATOR	PTFE	NATURAL	1						PART NO.										
1	BODY	BRASS	NICKEL	1						242125-10										
DESCRIPTION					MATERIAL	FINISH	QTY	CAD FILE C:/CONNEX/242125-10.DWG			DWG. NO.		242125-10.DWG		REV.	NC	SIZE	A	SCALE	NA
					DO NOT SCALE DRAWING															