


REV.	DATE	DESCRIPTION
NC	10/23/00	INITIAL RELEASE
A	06/25/06	UPDATE DRAWING FORMAT, REVISE PLATING TO NEXCOTE

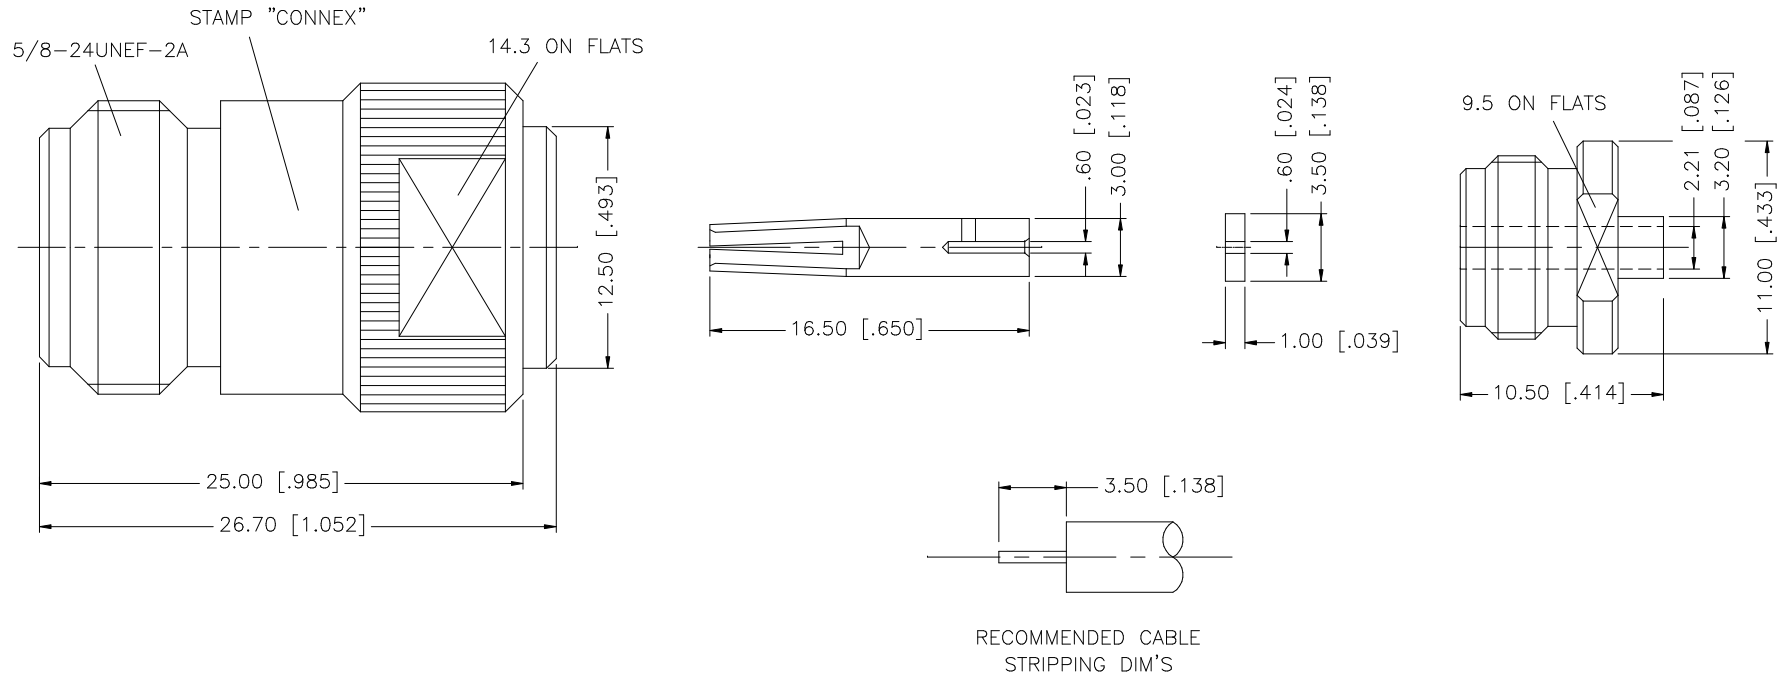

NOTE:

1. CONTACT PIN TO SOLDER.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex											
8						DRAWN	G.R.S.	06/25/06													
7						CHECKED															
6						ISSUED				PART DESCRIPTION N DIRECT SOLDER JACK (FOR .085”, .086” SEMI RIGID CABLE)											
5						SHEET	1 OF 1														
4	SOLDER NUT	BRASS	GOLD	1		CAD FILE C:/172/172237.DWG							PART NO. 172237								
3	CONTACT PIN	PHOS. BRONZE	GOLD	1																	
2	INSULATOR	TEFLON	NATURAL	2		DWG. NO. 172237.DWG											REV.	A	SIZE	A	SCALE
1	BODY	BRASS	NEXCOTE	1																	
DESCRIPTION		MATERIAL	FINISH	QTY																	