


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	NRN 45281	10/20	BNK

PRODUCT DATA DRAWING

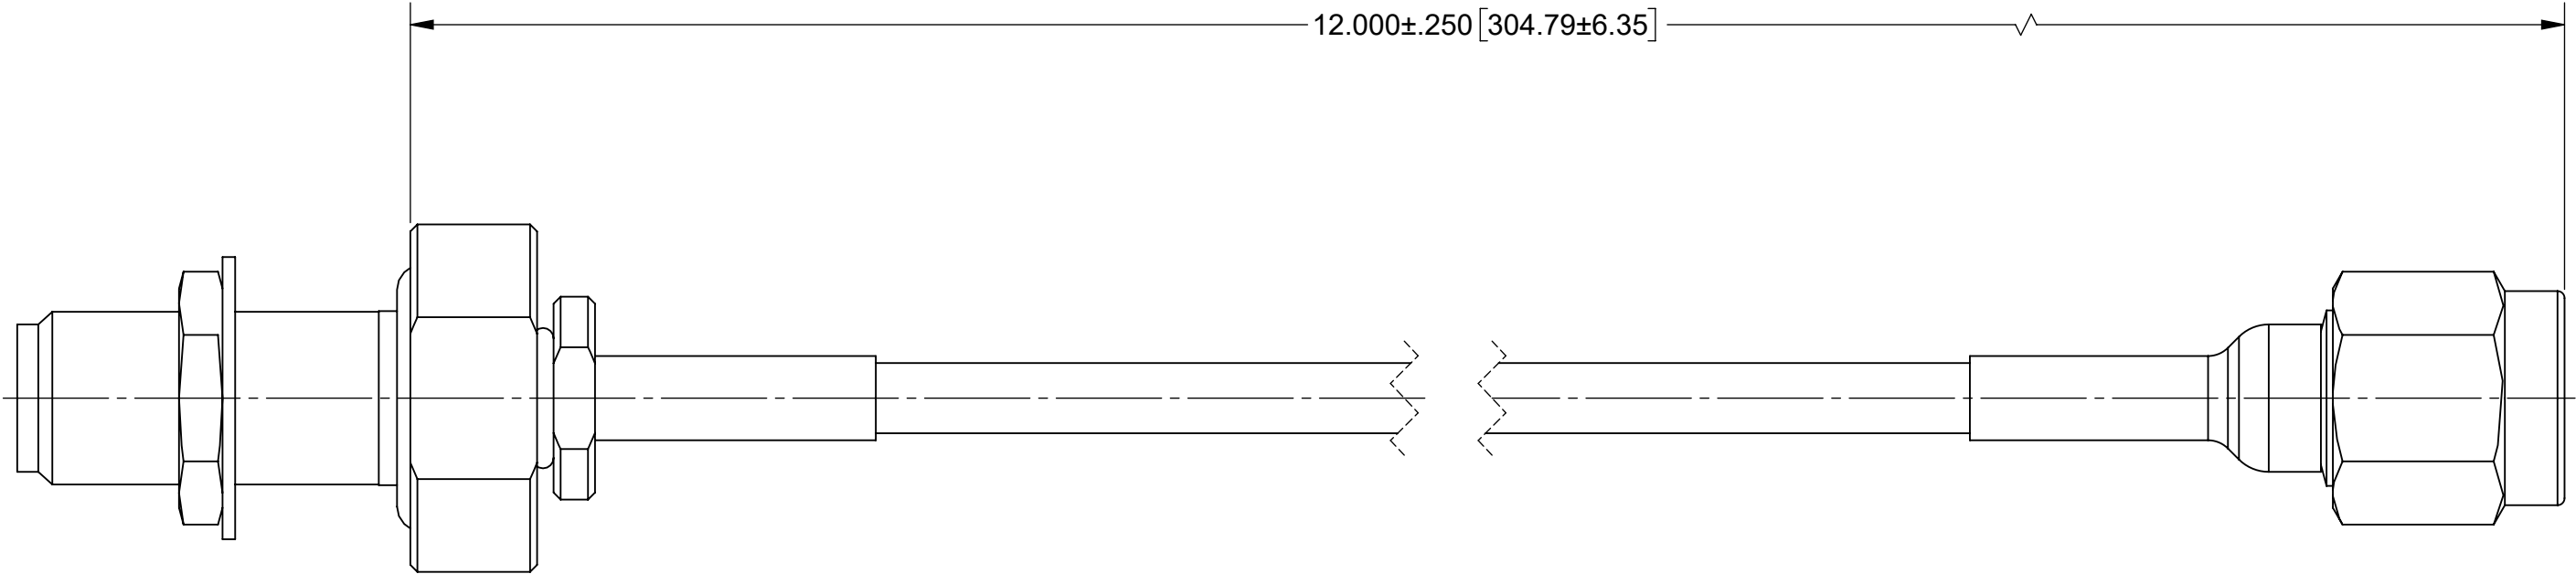

MATERIAL:


CONNECTORS: SMA FEMALE IP68 BULKHEAD (2921-61635)
SMA MALE (SF2906-6002)

CABLE: T-FLEX 405 (200-14-139)

STRAIN RELIEF: M23053/5

PERFORMANCE:

IMPEDANCE: 50 OHMS
FREQ. RANGE: DC TO 18.0 GHz.

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES:		UNLESS OTHERWISE SPECIFIED		 www.svmicrowave.com	
FINISH:	SEE NOTES	FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15'		1) ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS			
SURFACE AREA:	N/A	DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005				TITLE: SMA STR. F IP68 BLKHD TO SMA STR. M TFLEX405 CABLE ASSEMBLY	
PROPRIETARY		INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994				SIZE DWG. NO.	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.		THIRD ANGLE PROJECTION		DRAWN: JPM 10/29/20		7029-3530	
				CHECKED: BNK 10/29/20		SCALE: 4:1	
				APPROVED: BNK 10/29/20			
						SHEET 1 OF 1	