

5

4

3

2

1

NOTES:

1. MATERIALS AND FINISHES:
BNC STR PLUG - BRASS, NICKEL PLATING
BNC RA PLUG - BRASS, NICKEL PLATING
CABLE - RG 174

2. ELECTRICAL:
A. IMPEDANCE: 50 OHM

3. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL RF, 95-850-259-XXX AND DATE CODE"


REVISIONS

REV	DESCRIPTION	DATE	ECN	APPR
A	RELEASE TO MFG.	13-NOV-20	15403	SKP

SCALE 0.600



LENGTH 'L' (SEE TABLE)

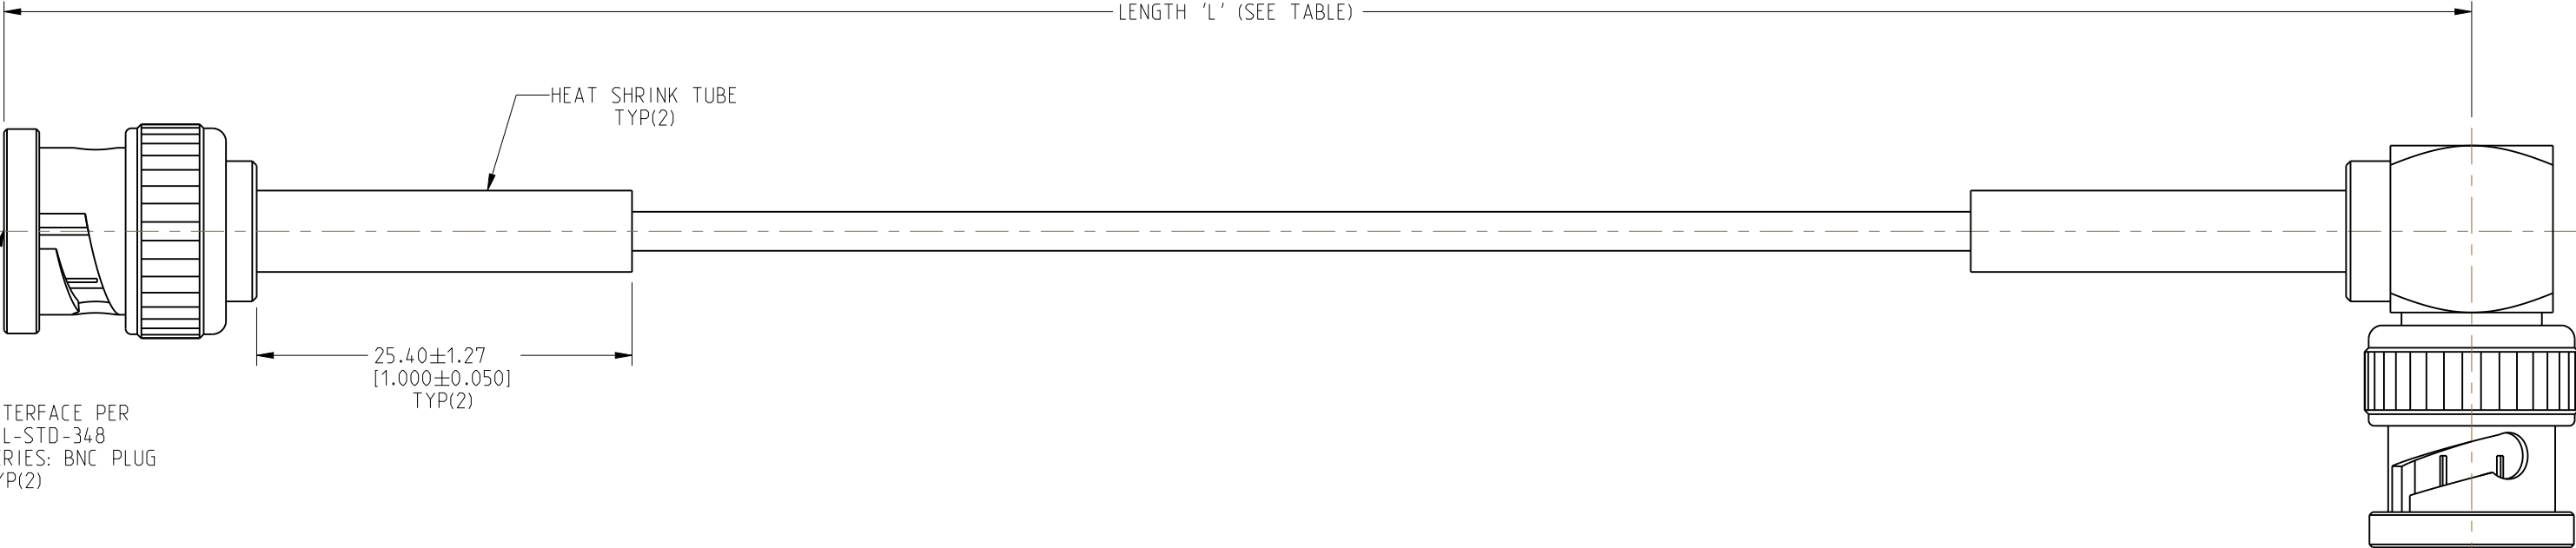

DESIGN REQUIREMENTS:

☒ FREQUENCY: DC - 6 GHz

☒ CONTINUITY

☐ VSWR: ____ 1 MAX.

☒ HI-POT: 900 VRMS

☐ INS. LOSS: ____ dB MAX.

☐ OTHER

LENGTH TABLE

PART NUMBER (IMPERIAL)	PART NUMBER (METRIC)	LENGTH 'L' IN INCHES [METERS]
95-850-259-006	-	6.00 [0.152]
95-850-259-012	-	12.00 [0.305]
95-850-259-018	-	18.00 [0.457]
-	95-850-259M050	19.69 [0.500]
95-850-259-024	-	24.00 [0.610]
95-850-259-036	-	36.00 [0.914]
-	95-850-259M100	39.37 [1.000]

TOLERANCE TABLE

LENGTH IN INCHES/FT [METERS]	TOLERANCE
0" - 23.90" [0 - 0.607]	±0.25" [0.006]
24.00" - 59.00" [0.610 - 1.499]	±0.50" [0.013]
5.0' - 24.9' [1.524 - 7.617]	±2.5%
25.0' & UP [7.620 & UP]	±5.0%

Amphenol RF

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

Amphenol RF

95-850-259-XXX

THIRD ANGLE PROJ.

REFERENCE

EAR# 10193

UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE METRIC [INCHES] AND TOLERANCES ARE:

<0.5mm = ±0.05mm [<0.020 = ±0.002]

>0.5 - 6mm = ±0.1mm [>0.020 - 0.236 = ±0.004]

>6.00 - 30mm = ±0.2mm [>0.236 - 1.181 = ±0.008]

>30.00 - 120mm = ±0.3mm [>1.181 - 4.725 = ±0.012]

ANGLES = ±1°

MATERIAL

SEE NOTES

ENGINEER KRISHNA S

DATE 14-OCT-20

TITLE

BNC STR PLUG TO BNC RA PLUG USING RG 174 CABLE VARIOUS LENGTH

SHEET NO. 2 OF 2

SCALE: 2.3:1.0

SIZE

B

DRAWING NO. 95-850-259-XXX

ITEM NO. 95-850-259-XXX

PART NO. 95-850-259-XXX

REV A

5

4

3

2

1

Downloaded from Arrow.com