


REV.	DATE	DESCRIPTION
A	12/05/02	ADD 1/4-36UNS-2A MATING FACE
B	01/29/03	MODIFY OVERALL BODY DIMENSIONS
C	03/18/04	ADD LOCK RING DIMENSION

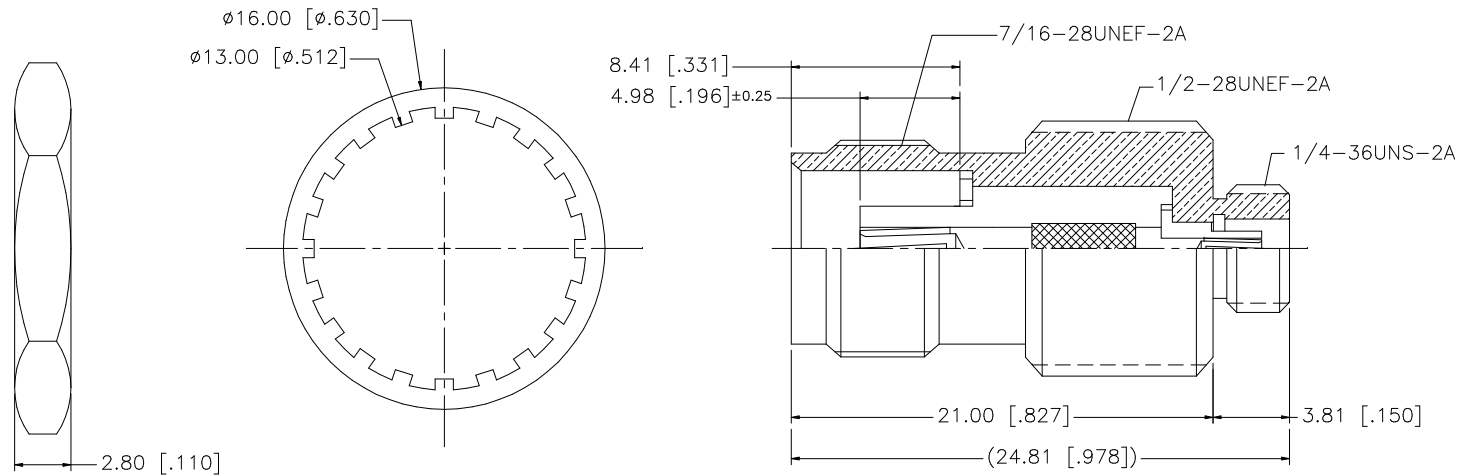

NOTES:

1. MAX. PANEL THICKNESS = 6.5mm

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex									
8						DRAWN	G.R.S.						03/18/04				
7						CHECKED											
6	LOCK RING	BRASS	NICKEL	1					PART DESCRIPTION								
5	HEX NUT	BRASS	NICKEL	1					TNC BULKHEAD JACK TO MCX JACK ADAPTER								
4	LOCK WASHER	BRASS	NICKEL	1					PART NO.								
3	INSULATOR	TEFLON	NATURAL	1					242190								
2	CONTACT PIN	BER. COPPER	GOLD	1					DWG. NO.								
1	BODY	BRASS	GOLD	1				242190									
	DESCRIPTION	MATERIAL	FINISH	QTY			CAD FILE	C:/242/242190.DWG		DWG. NO.	242190.DWG	REV.	C	SIZE	A	SCALE	NA