


1. MATERIALS AND FINISHES:
CONNECTOR A: 112132- BNC STR CRIMP PLUG
CONNECTOR B: 112178- BNC R/A CRIMP PLUG
CABLE: RG-316

4. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL, 95-850-266-XXX, AND DATE CODE"

SCALE 0.500

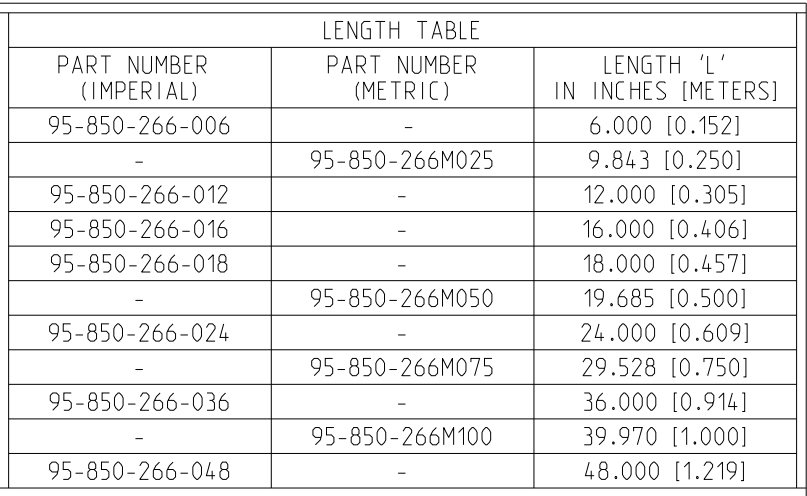

TOLERANCE TABLE	
LENGTH IN INCHES/FT [METERS]	TOLERANCE
0" - 23.90" [0-0.607]	±0.25" [0.006]
24.00" - 59.00" [0.610 - 14.99]	±0.50" [0.013]
5.0' - 24.9' [1.524 - 7.617]	±2.5%
25.0' & UP [7.620 & UP]	±5.0%

☒	FREQUENCY:	DC	TO	4.0 GHz	☒	CONTINUITY
☐	VSWR:	----	:1	MAX	☒	HI-POT: 1500 VRMS
☐	INS. LOSS:	----	dB	MAX	☐	OTHER

NOTICE: These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE METRIC [INCHES] AND TOLERANCES ARE:

<0.5mm = ± 0.05 mm	[<0.020 = ± 0.002]
>0.5 - 6mm = ± 0.1 mm	[>0.020 - 0.236 = ± 0.004]
>6.00 - 30mm = ± 0.2 mm	[>0.236 - 1.181 = ± 0.008]
>30.00 - 120mm = ± 0.3 mm	[>1.181 - 4.725 = ± 0.012]

ENGINEER
D. GEORGE

BNC STR PLUG TO
BNC R/A PLUG
RG-316, VARIOUS LENGTHS

SHEET NO. 2 OF 2

SCALE: 1.0:1.0

Amphenol RF

SIZE

DRAWING NO. 95-850-266-XXX

ITEM NO. 95-850-266-XXX

PART NO. 95-850-266-XXX

REV

A

THIRD ANGLE PROJ.