


REV.	DATE	DESCRIPTION
NC	06/21/05	INITIAL RELEASE

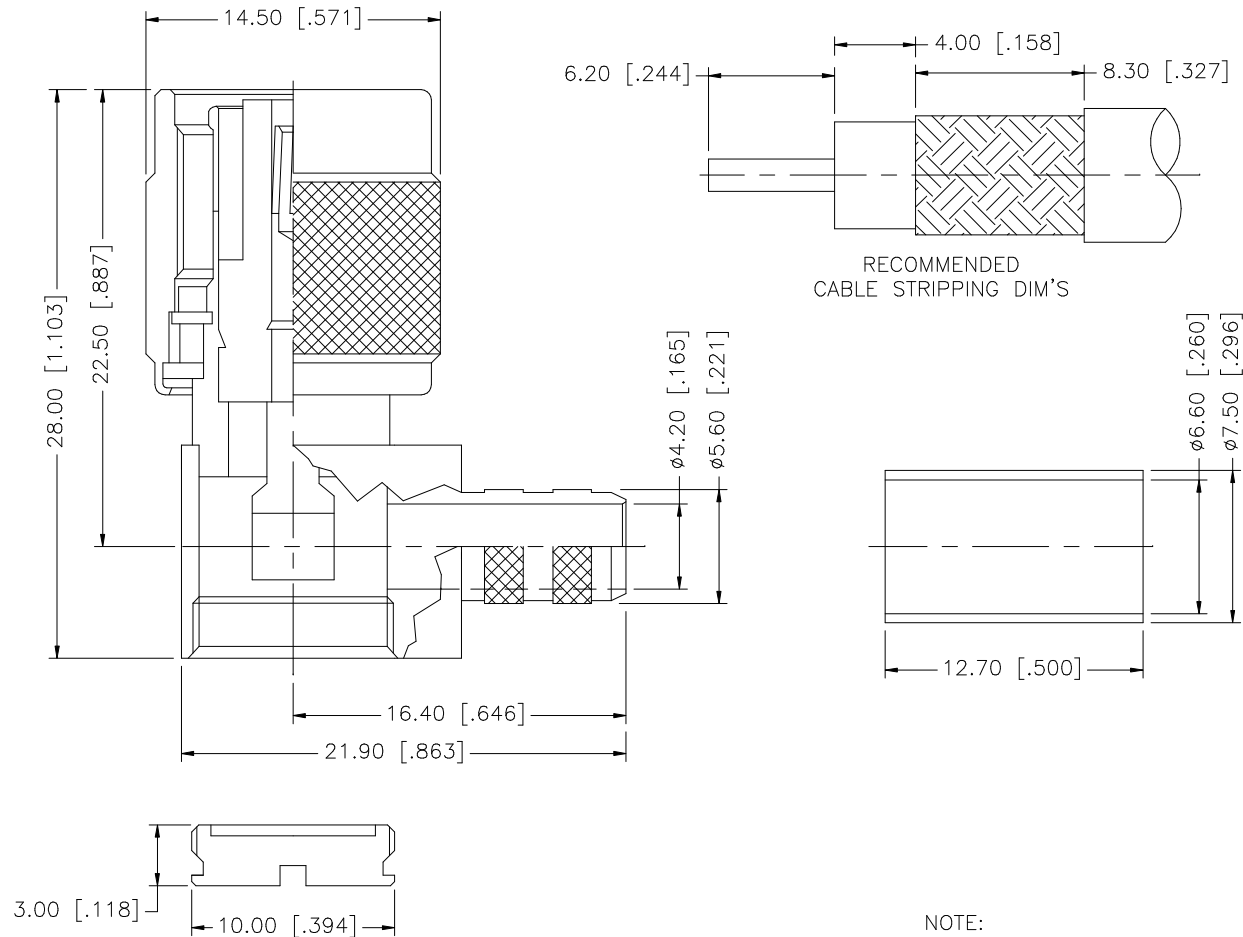

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .255"
2. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex										
8							DRAWN	G.R.S.	06/21/05												
7							CHECKED														
6					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm		ISSUED				PART DESCRIPTION TNC REVERSE POLARITY R/A CRIMP PLUG (FOR BELDEN RG-8/X, TIMES LMR-240)										
5	COVER	BRASS	NICKEL	1			SHEET	1 OF 1													
4	FERRULE	COPPER	NICKEL	1							PART NO. 122414RP										
3	CONTACT PIN	PHOS. BRONZE	GOLD	1																	
2	INSULATOR	TEFLON	NATURAL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”		CAD FILE		C:/122/122414RP.DWG			DWG. NO.		122414RP.DWG		REV. NC		SIZE A		SCALE NA	
1	BODY/SHELL	BRASS	NICKEL	1			DO NOT SCALE DRAWING														
DESCRIPTION					MATERIAL		FINISH		QTY												