

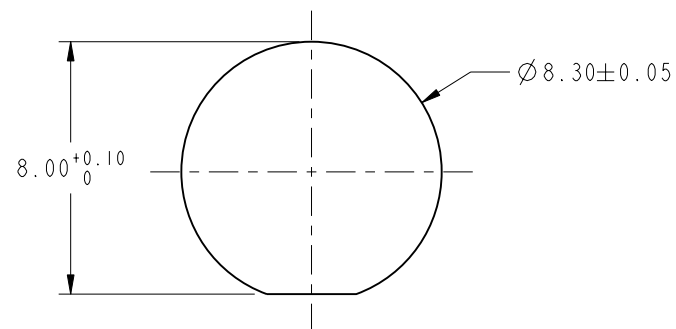
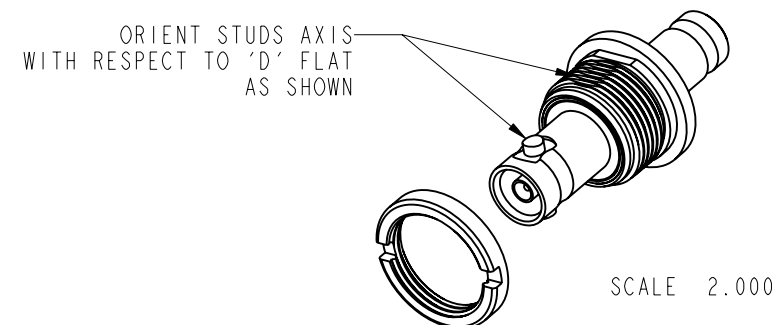


1. MATERIALS AND FINISHES:
 - BODIES - BRASS, NICKEL PLATING
 - CONTACT - BeCu, GOLD PLATING
 - SLEEVE - DELRIN
 - INSULATOR - PTFE
2. ELECTRICAL:
 - A. IMPEDANCE: 75 OHM
 - B. FREQUENCY RANGE: DC - 3 GHz
 - C. RETURN LOSS: -25 dB MIN @ 3 GHz
3. MECHANICAL:
 - A. DURABILITY: 500 CYCLES MIN.
 - B. TEMPERATURE RANGE: +65° C TO -165° C
4. PACKAGING:
 - A. QUANTITY: SINGLE PACK
 - B. MARKING: BAG TO BE MARKED
"AMPHENOLRF APH-HD-ISO-1023 AND DATE CODE"

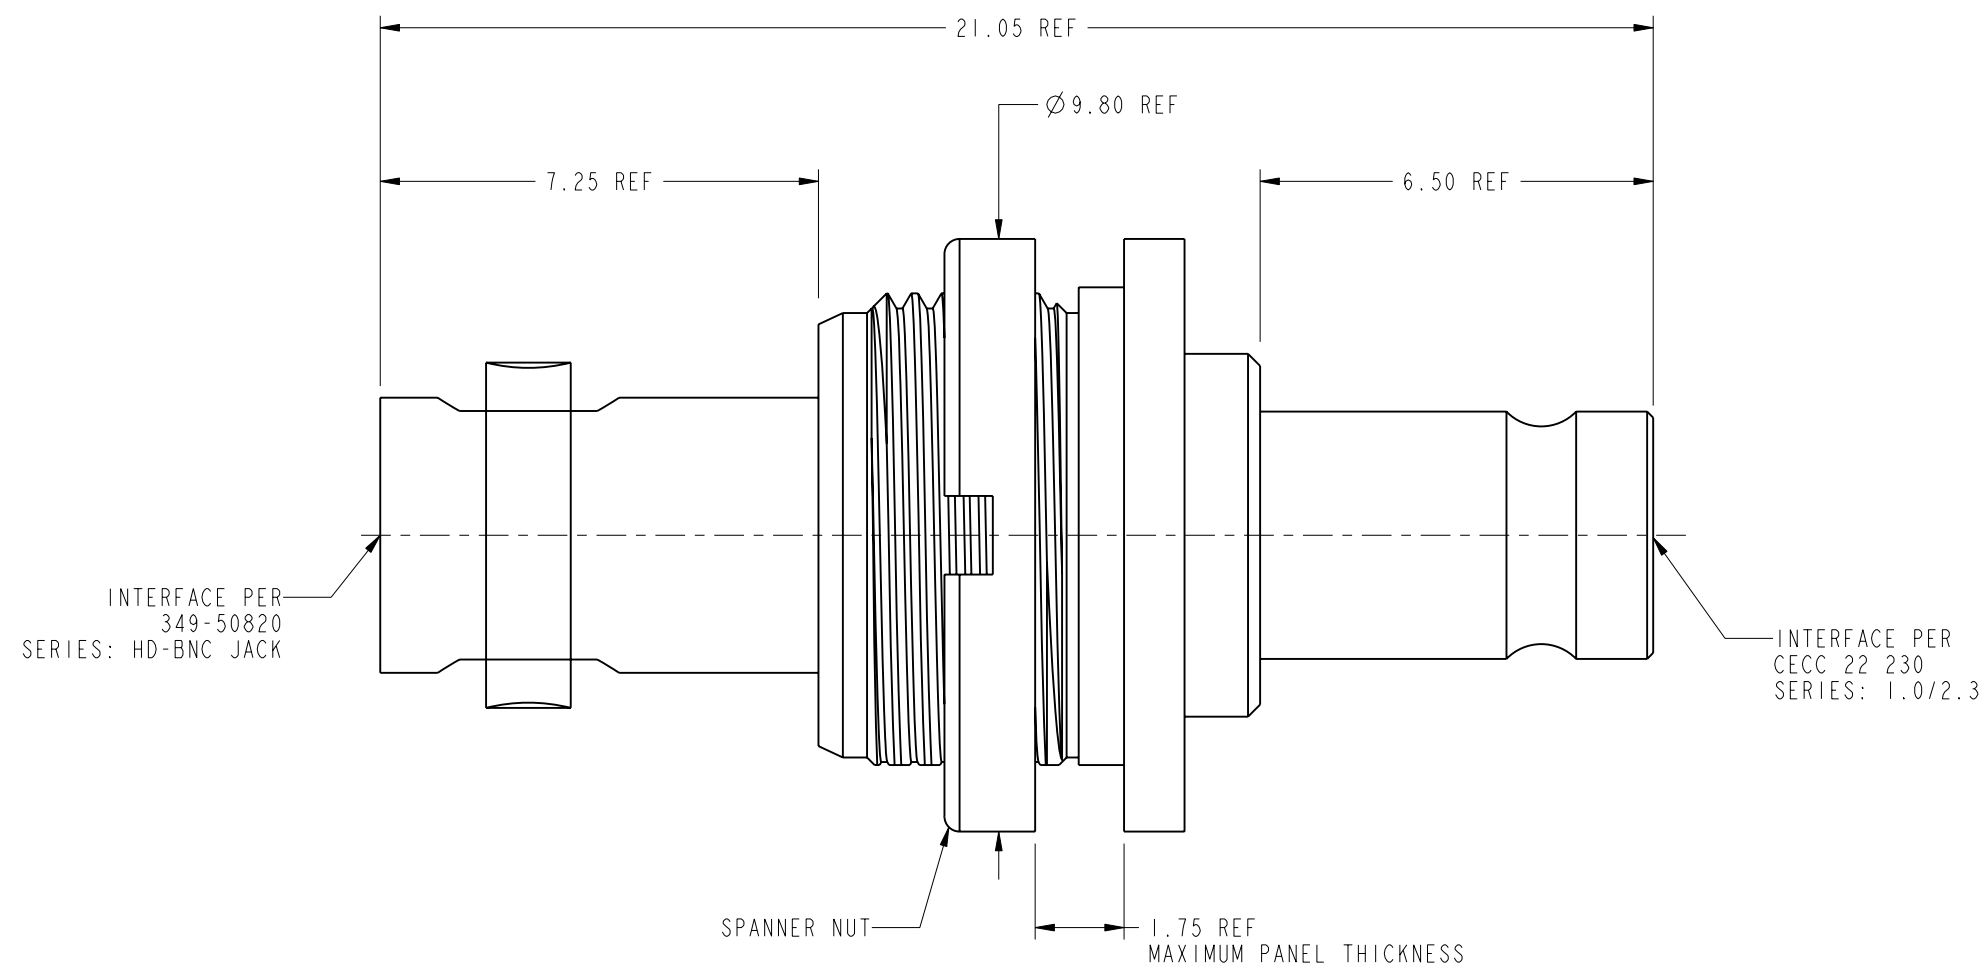

SCALE 4.200
RECOMMENDED MOUNTING
HOLE DIMENSIONS

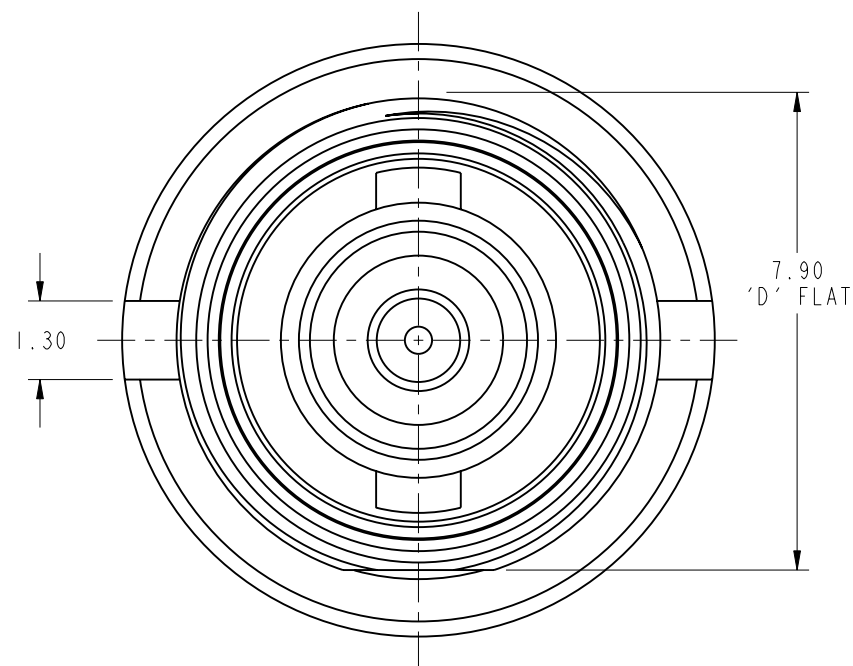

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ± 0.05mm ±0.1mm ±0.2mm ± 0.3mm ±1°	MATERIAL SEE NOTES REFERENCE EAR # 4295 AND EXP:615X-2759-100 CONFIGURATION LEVEL: ☐ ☐ ☐ FINISH	DRAWN I.XU	DATE 19-Jul-11	TITLE ISOLATED ADAPTER HD BNC STR JACK TO 1.0/2.3 JACK SCALE: 8.0:1.0 SHEET 2 OF 2 DWG SIZE B	REV B	Amphenol RF www.amphenolrf.com DRAWING NO. APH-HD-ISO-1023 ITEM NO. APH-HD-ISO-1023 PART NO. APH-HD-ISO-1023
NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.		ENGINEER A ARUN PRABU	DATE 14-Jan-11			
		APPROVED S.HSIEH	DATE 25-Jul-11			