

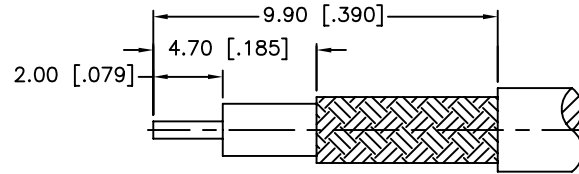
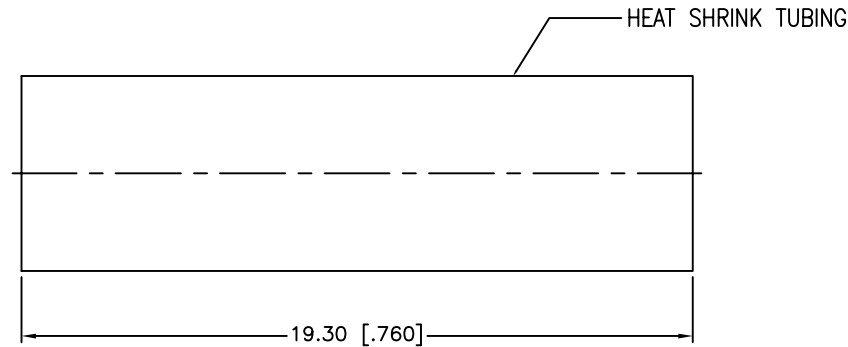
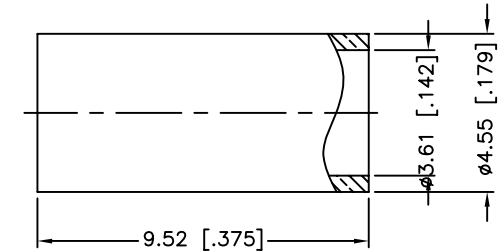


REV.	DATE	ECR. NO.	DESCRIPTION
NC	12/17/09	XXXXXX	INITIAL RELEASE

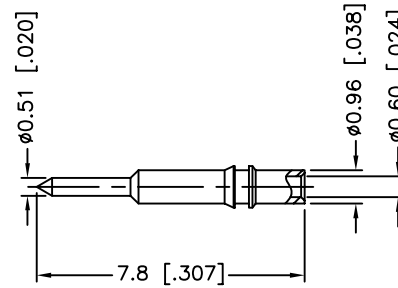

RECOMMENDED
CABLE STRIPPING DIM'S

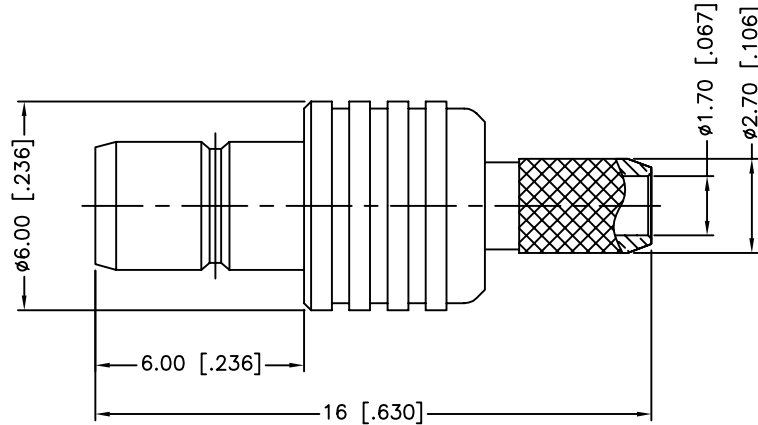

1. CRIMPED FERRULE
HEX CRIMP SIZE .151"
2. CRIMPED CONTACT PIN
SQ. CRIMP SIZE 0.7mm

9				1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex												
8				1		DRAWN	C.WANG									12/17/09	PART DESCRIPTION SMB CRIMP JACK (FOR RG-316U/D)			
7	HEAT SHRINK TUBING		BLACK	1		CHECKED														
6	FERRULE	COPPER	NICKEL	1		ISSUED			PART NO. 142182											
5	CONTACT PIN	BRASS	GOLD	1		SHEET	1 OF 1						DWG. NO. 142182.DWG REV. NC SIZE A SCALE NA							
4	BARREL	BRASS	NICKEL	1																
3	INSULATOR	PTFE	NATURAL	1																
2	INSULATOR	PTFE	NATURAL	1																
1	BODY	BRASS	NICKEL	1																
	DESCRIPTION	MATERIAL	FINISH	QTY				CAD FILE C:/CONNEX/142182.DWG												