






REV.	DATE	ECR NO.	DESCRIPTION
A	04/31/03	XXXXXX	UPDATE DRAWING FORMAT
B	11/16/10	2367	REVISE THE LOCK WASHER; UPDATED DRAWING FORMAT



RECOMMENDED
MOUNTING HOLE

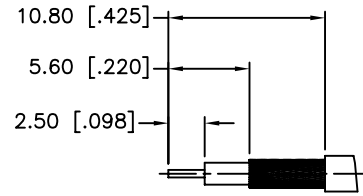

RECOMMENDED
CABLE STRIPPING DIM'S

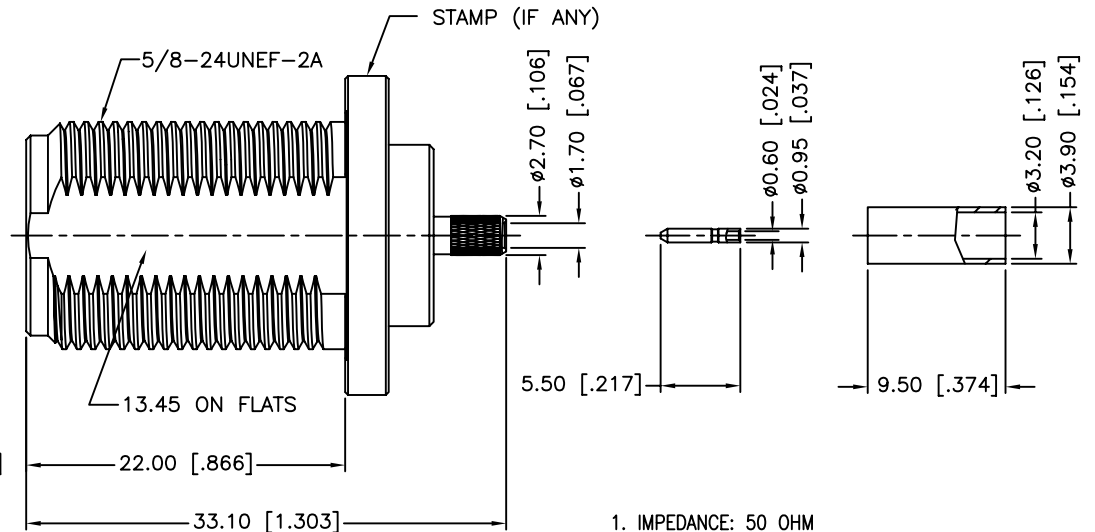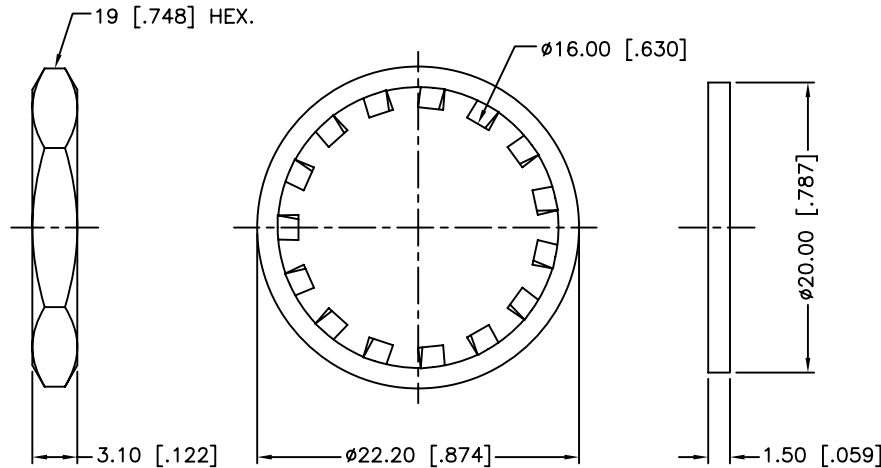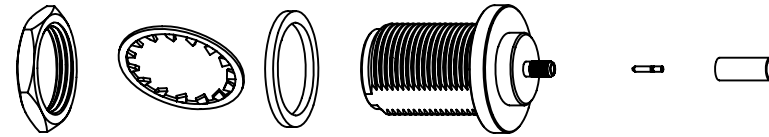

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC-11 GHz
3. DIELECTRIC WITHSTANDING VOLTAGE: 2500 VRMS MIN.
4. DURABILITY: 500 CYCLES MIN.
5. TEMPERATURE RANGE: -65°C TO +165°C
6. CRIMPED FERRULE
HEX. CRIMP SIZE .128"
7. CONTACT PIN CAN BE SOLDERED
OR USE 4-WAY INDENT TOOL #47001
8. MAX. PANEL THICKNESS=6.5mm

9	FERRULE	BRASS	NEXCOTE	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex																			
8	CONTACT PIN	BRASS	GOLD	1		DRAWN	M.ZHANG	08/28/12																					
7	HEX NUT	BRASS	NEXCOTE	1		CHECKED																							
6	LOCK WASHER	BRASS	NEXCOTE	1		ISSUED			PART DESCRIPTION																				
5	GASKET	SILICON RUBBER	RED	1		SHEET	1 OF 1		N BULKHEAD CRIMP JACK (FOR RG–174/U,188A/U,316/U CABLE)																				
4	BARREL	BRASS	NEXCOTE	1		PART NO.							172129																
3	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1		DWG. NO.							172129.DWG																
2	INSULATOR	PTFE	NATURAL	1		REV.							B																
1	BODY	BRASS	NEXCOTE	1		SIZE							A																
DESCRIPTION					MATERIAL					FINISH					QTY					SCALE					NA				