


NOTES:

- MATERIALS AND FINISHES:
REAR BODY AND BAYONET SLEEVE - BRASS, NICKEL PLATING
OUTER CONTACT - BeCu, NICKEL PLATING
CONTACT - PHOSPHOR BRONZE, GOLD PLATING
FERRULE - COPPER, NICKEL PLATING
INSULATOR - PTFE
CAP - STAINLESS STEEL, PASSIVATED
 - ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE : DC - 6 GHz
C. VSWR : 1.12 @ 3 GHz.
 - MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE : -65°C TO +165°C
 - ENVIRONMENTAL:
A. THERMAL SHOCK PER MIL-STD-202 METHOD 107
TEST CONDITION B (EXCEPT HIGH TEMP @200°C)
B. VIBRATION: MIL-STD-202 METHOD 204 TEST CONDITION B
C. SHOCK: MIL-STD-202 METHOD 213 TEST CONDITION B
D. CORROSION: MIL-STD-202 METHOD 101
TEST CONDITION B 5% SALT SOLUTION
E. SEALING: IP-67 IN MATED CONDITION
 - PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED:
"AMPHENOL RF, 34-5021 DATE CODE"
 - HIGH DENSITY INSTALLATION/REMOVAL TOOL: 227-T2000
 - CABLE ASSEMBLY INSTRUCTIONS:
A. TRIM CABLE AS SHOWN.
B. SLIDE FERRULE AND HEAT SHRINK TUBE ONTO CABLE.
C. INSERT CABLE INTO CONNECTOR.
D. SOLDER CONTACT TO CABLE CENTER CONDUCTOR.
E. CRIMP FERRULE WITH .213" HEX.
F. APPLY HEAT SHRINK TUBING OVER FERRULE.
G. HEAT SHRINK TUBING SHOULD FULLY (360 DEG) COVER
THE BUMP ON BODY AND END WITHIN AREA "A".
 - CAP ASSEMBLY INSTRUCTIONS:
A. PLACE O-RING ON CAP AS SHOWN.
B. ASSEMBLE CAP TO BODY WITH 5 IN-LBS MAX TORQUE.
- 9 > SHOWS CABLE ENTRY DIMENSIONS.
- ADHESIVE LINED HEAT SHRINK TUBE
IS INCLUDED (NOT SHOWN)

THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG.	06-Aug-12	49190	TD
B	5 IN-LBS MAX WAS 8-10 IN-LBS, CAP S.S. WAS BRASS, ADDED HEAT ASSEMBLY NOTES AND DIM	08-Aug-12	49204	TD

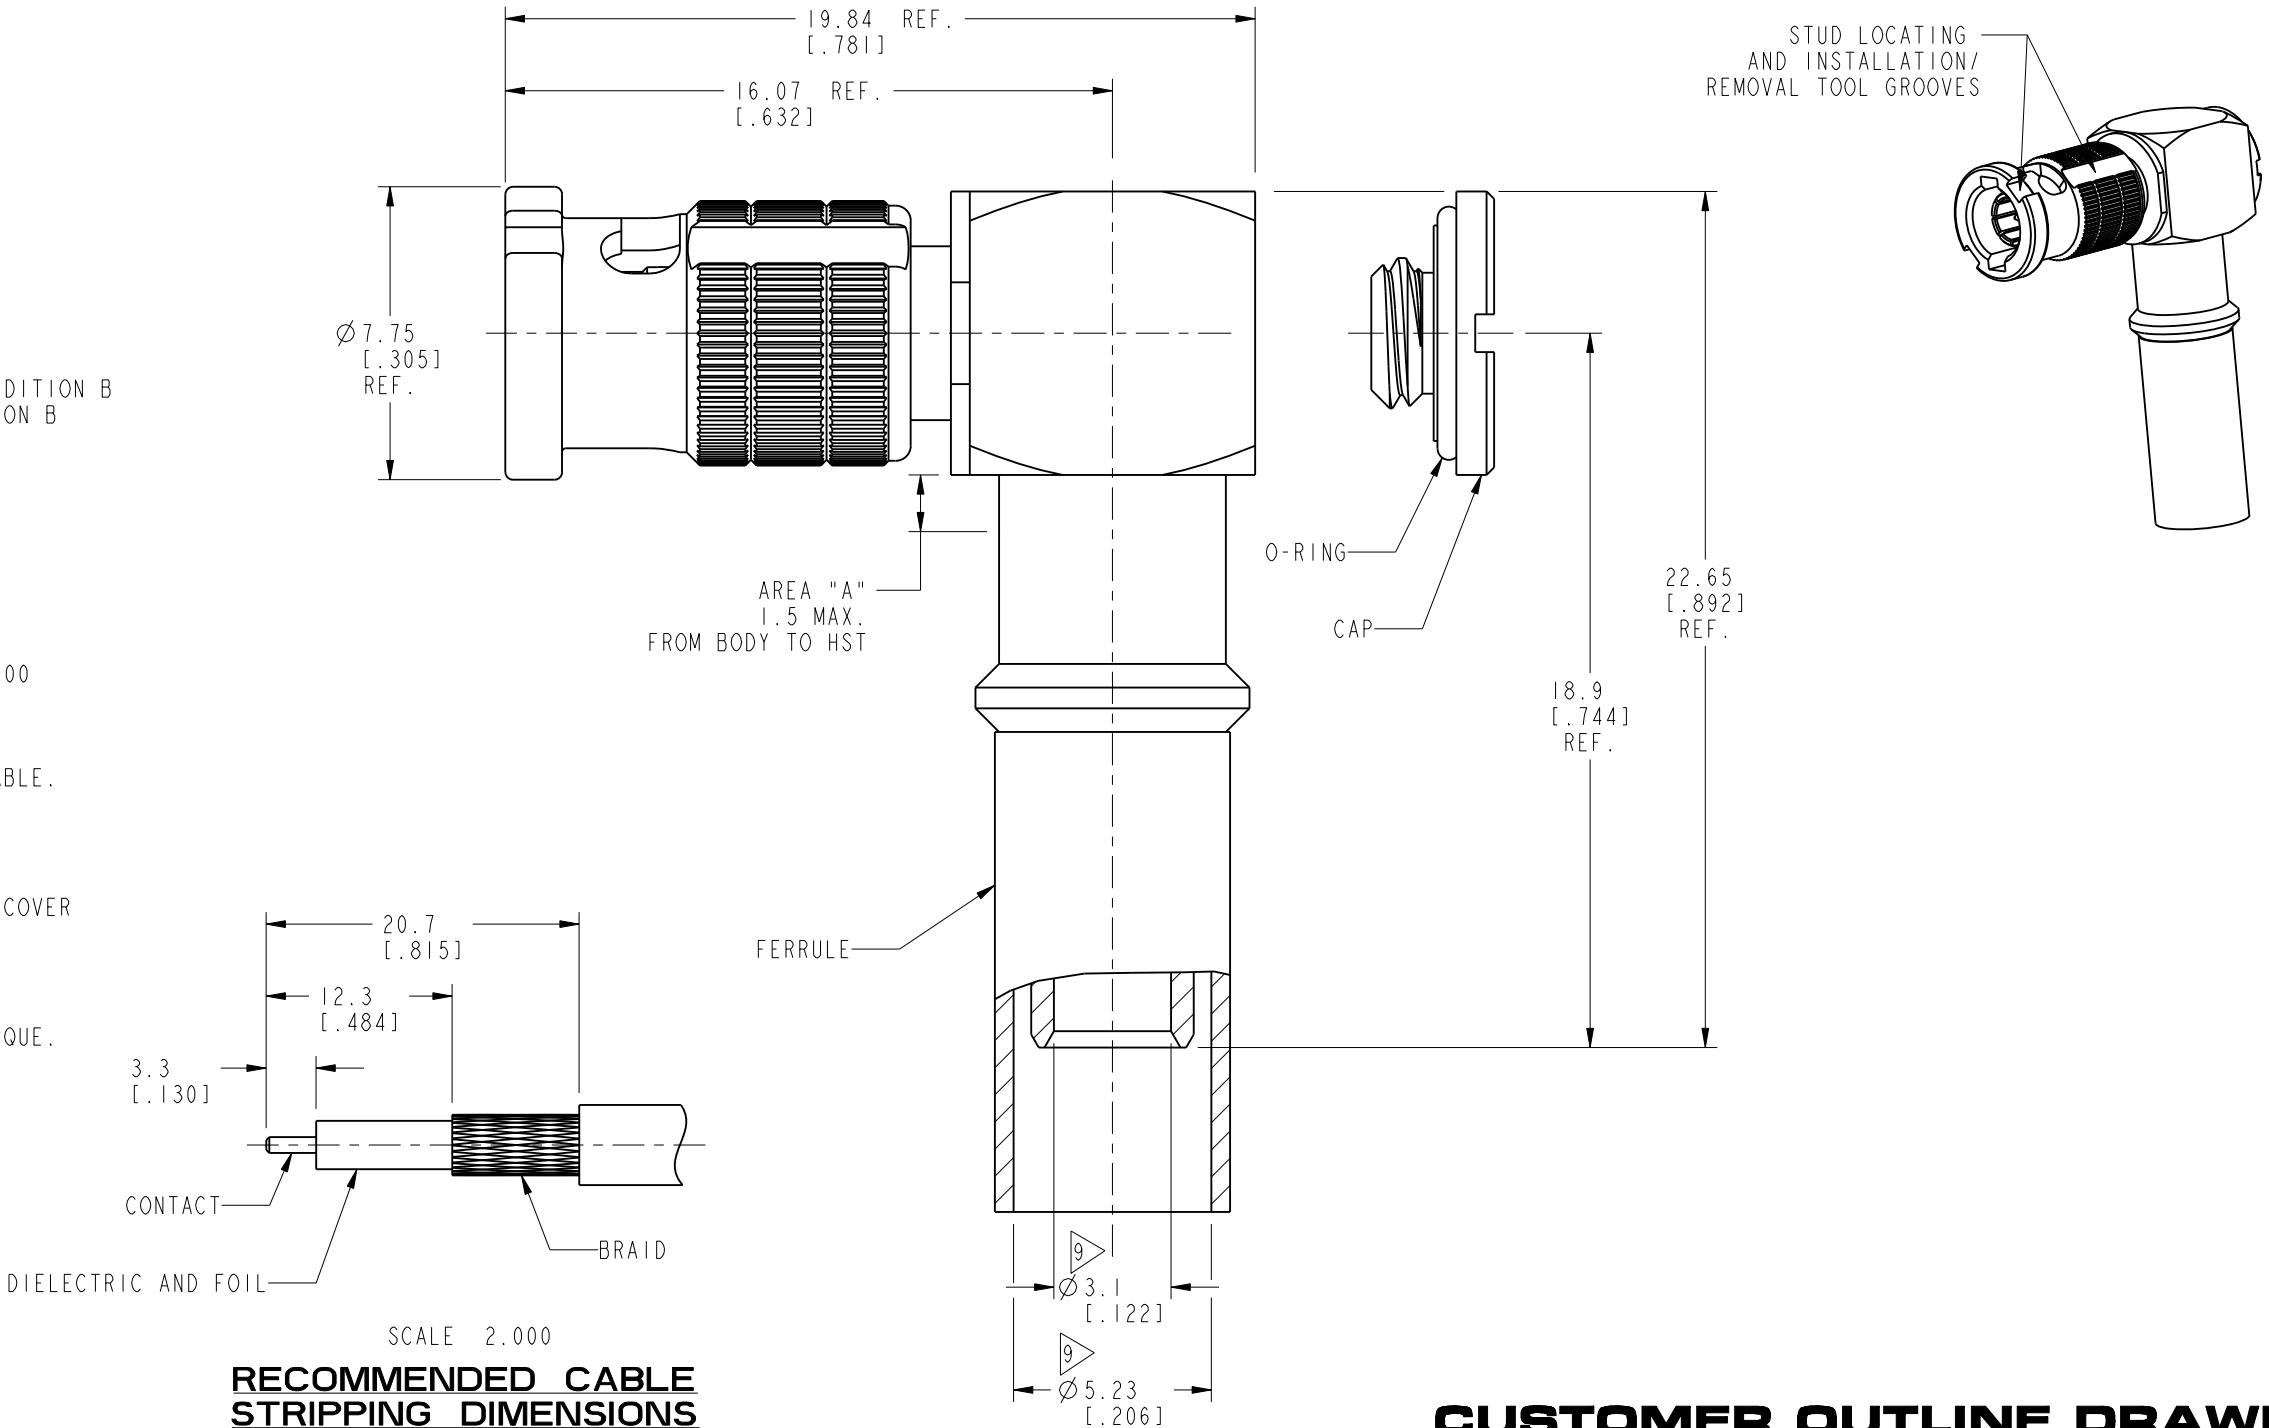

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
<0.5mm ± 0.05mm 0.5 - 6mm ±0.1mm 6 - 30mm ±0.2mm 30 - 120mm ±0.3mm ANGLES ±1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL	SEE NOTES
REFERENCE	EAR # 5027
CONFIGURATION LEVEL:	
FINISH	

DRAWN	T.DENG	DATE	08-Aug-12
ENGINEER	A ARUN PRABU	DATE	09-May-12
APPROVED	S.HSIEH	DATE	16-Aug-12
CAD FILE			

TITLE
50 OHM HD BNC RA PLUG
FOR LMR 195-UF CABLE
IP-67 IN MATED CONDITION

SCALE: 5.0:1.0	SHEET 2 OF 2
DWG SIZE B	REV B

Amphenol RF www.amphenolrf.com
DRAWING NO.34-5021
ITEM NO.34-5021
PART NO.34-5021