


REV.	DATE	ECR NO.	DESCRIPTION
NC	05/18/11	XXXXXX	INITIAL RELEASE
A	06/08/11	2179	THE BODY'S KNURL WAS CHANGED

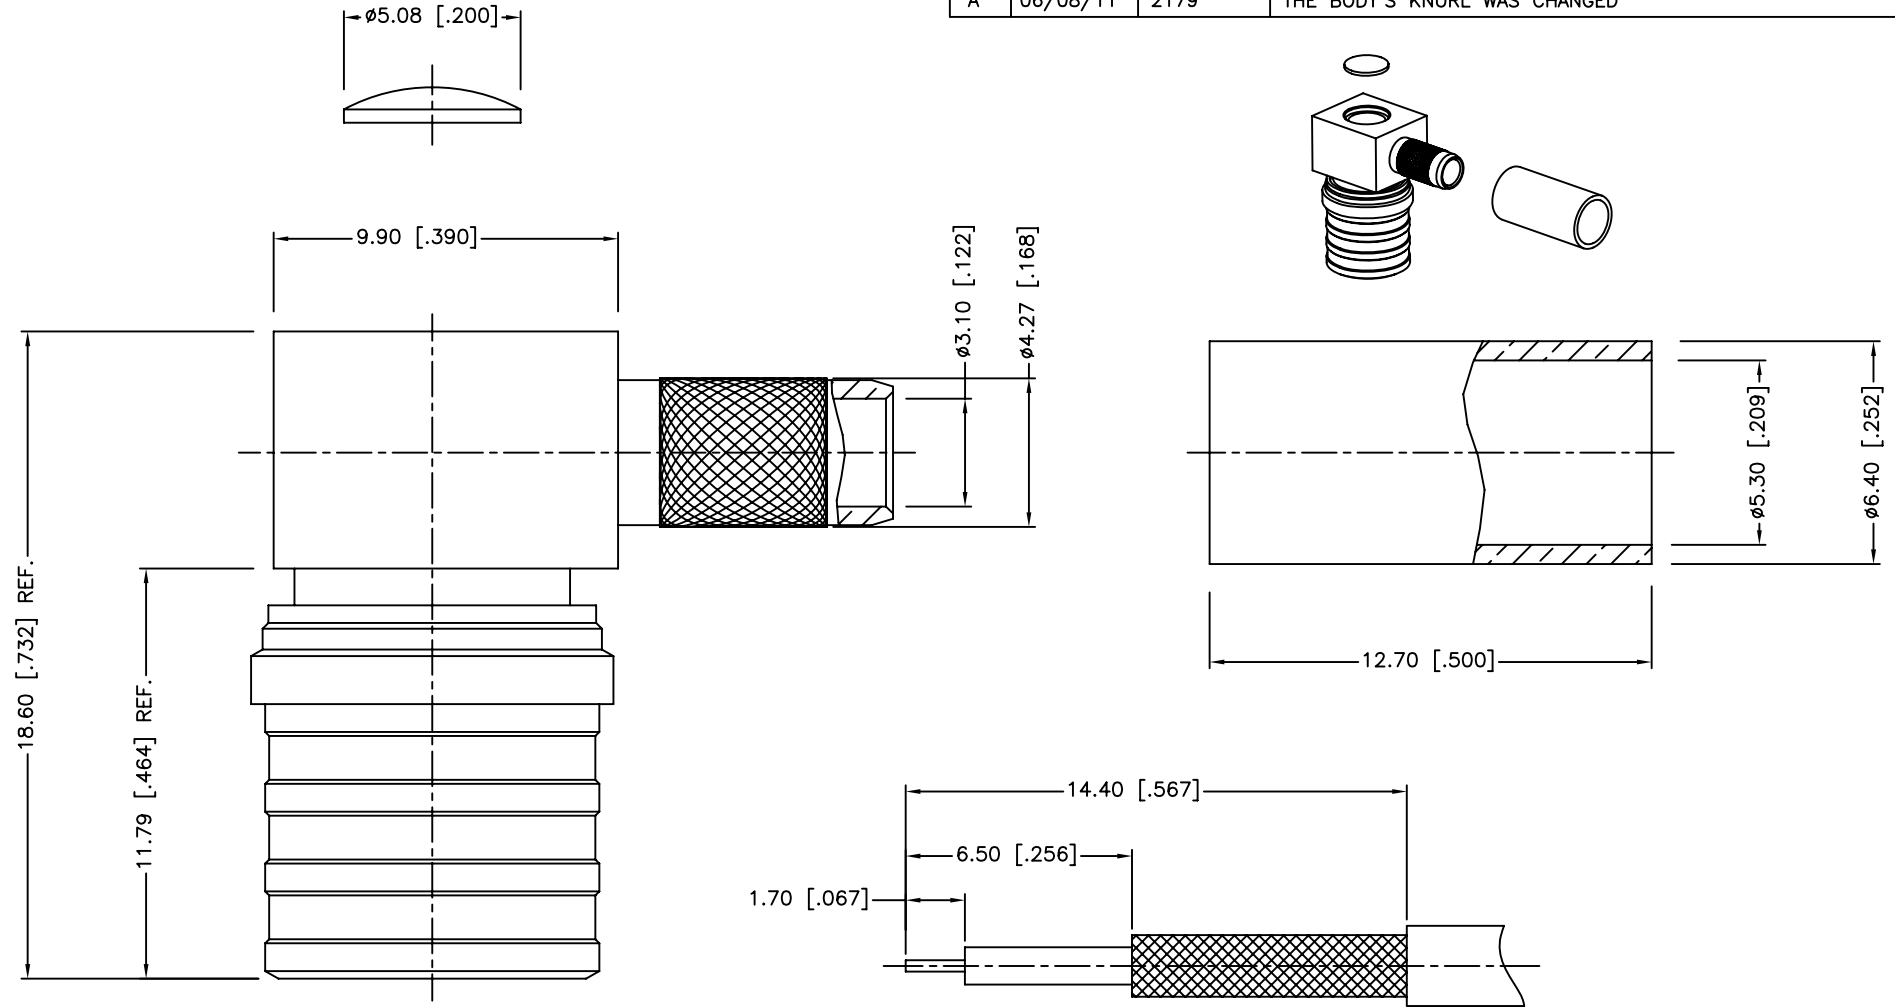

RECOMMENDED CABLE STRIPPING DIM'S

1. CRIMPED FERRULE
HEX. CRIMP SIZE .216"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex			
					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm		DRAWN S.LI		05/18/11					
7	FERRULE	BRASS	NEXCOTE	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"		CHECKED				PART DESCRIPTION QMA R/A PLUG FOR RG–58 TYPE CABLE			
6	CAP	BRASS	NEXCOTE	1			ISSUED							
5	CONTACT PIN	BRASS	GOLD	1			SHEET 1 OF 1				PART NO. 134102			
4	SLEEVE	BRASS	NEXCOTE	1			CAD FILE C:/CONNEX/134102.DWG							
3	OUTER CONTACT	PHOS. BRONZE	NEXCOTE	1	DO NOT SCALE DRAWING									
2	INSULATOR	PTFE	NATURAL	1										
1	BODY	BRASS	NEXCOTE	1										
	DESCRIPTION	MATERIAL	FINISH	QTY										