


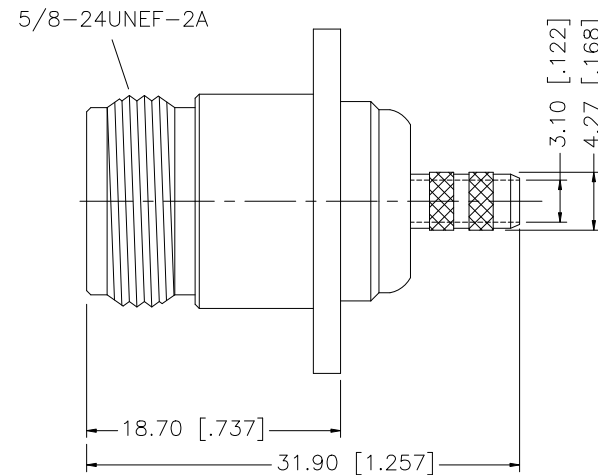
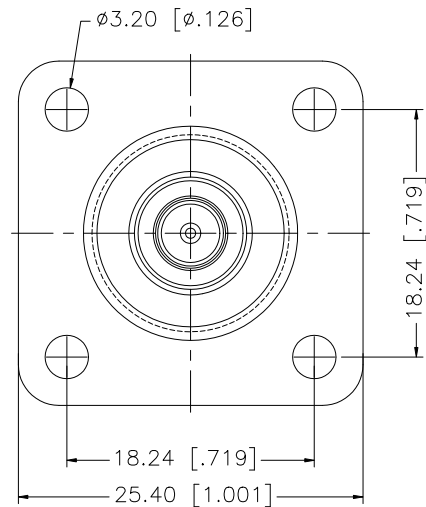


REV.	DATE	DESCRIPTION
A	02/09/05	MODIFY PLATING SPEC/ UPDATE DRAWING FORMAT
B	07/12/07	REVISE CRIMP NOTES

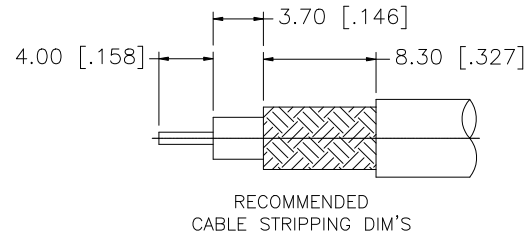

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .100"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex							
8						DRAWN	G.R.S.								07/12/07
7						CHECKED									
6					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	ISSUED		PART DESCRIPTION N PANEL CRIMP JACK (FOR RG–55/U, 143A/U, 223/U, 400/U)							
5						SHEET	1 OF 1								
4	FERRULE	COPPER	NEXCOTE	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”				PART NO. 172175						
3	CONTACT PIN	PHOS. BRONZE	GOLD	1											
2	INSULATOR	TEFLON	NATURAL	1					DWG. NO. 172175.DWG						
1	BODY	BRASS	NEXCOTE	1											
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE C:/172/172175.DWG			REV.	B	SIZE	A	SCALE	NA	