
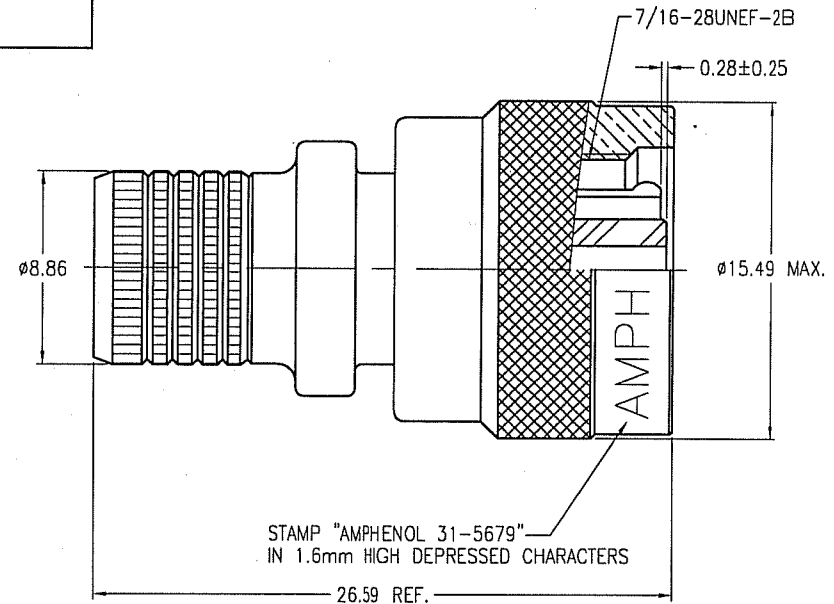
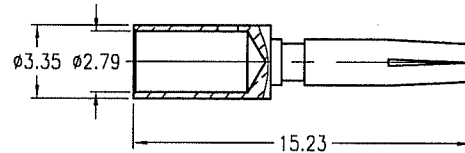
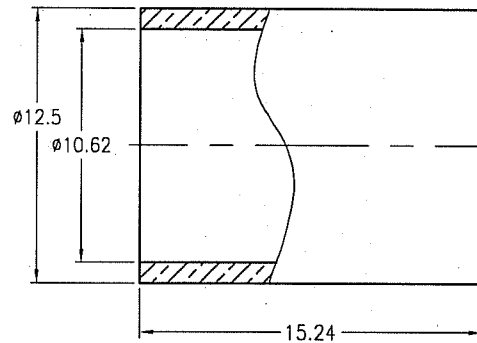


NOTES:

- MATERIALS AND FINISHES(PLATING THICKNESS IN MICRO-INCHES):
BODY – BRASS, NICKEL PLATING
CONTACT – BERYLLIUM COPPER, GOLD PLATING
INSULATOR – PTFE, NATURAL
- ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC 0–11 GHz
C. VSWR(RETURN LOSS): 1.3, MAX.
D. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
- MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: – 65°C to +165°C
- SEE AMPHENOL SPEC. 349–50586 FOR CABLE STRIPPING AND ASSEMBLY INSTRUCTIONS

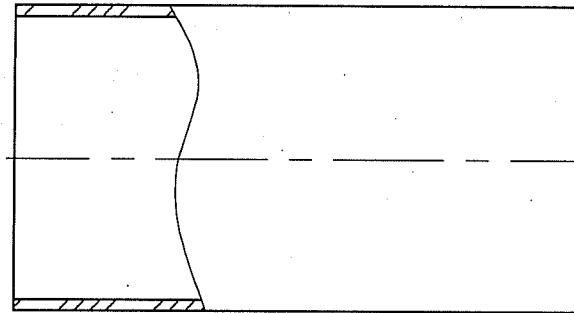

STAMP "AMPHENOL 31-5679"
IN 1.6mm HIGH DEPRESSED CHARACTERS

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: 0.5 – 6mm ±0.1mm 6 – 30mm ±0.2mm 30 – 120mm ±0.3mm ANGLES ±1°	MATERIAL	DRAWN	DATE	TITLE TNC PLUG REVERSE INTERFACE (FOR BELDEN 9913 CABLE)			Amphenol RF Danbury CT USA, Tainan Taiwan, Shenzhen China www.amphenolrf.com	
		ROCKY	23-Sep-05					
		NOTICE – These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	REFERENCE	ENGINEER	DATE	DRAWING NO. 31-5679		
				SCOTT.H	23-Sep-05			
FINISH	APPROVED			DATE	ITEM NO. 31-5679			
	SCOTT.H			23-Sep-05				
	CAD FILE		DWG SIZE	CODE ID	SHEET 2 OF 2	REV E	PART NO. 31-5679	
	F:\DWG\CNPD\31\5679-ESZ		B	74868				