


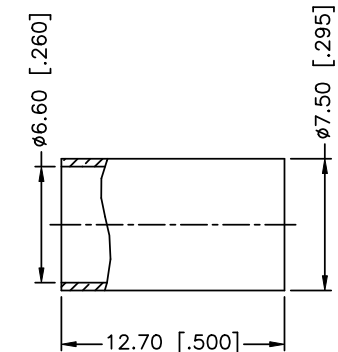


RECOMMENDED
MOUNTING HOLE



SCALE 0.500

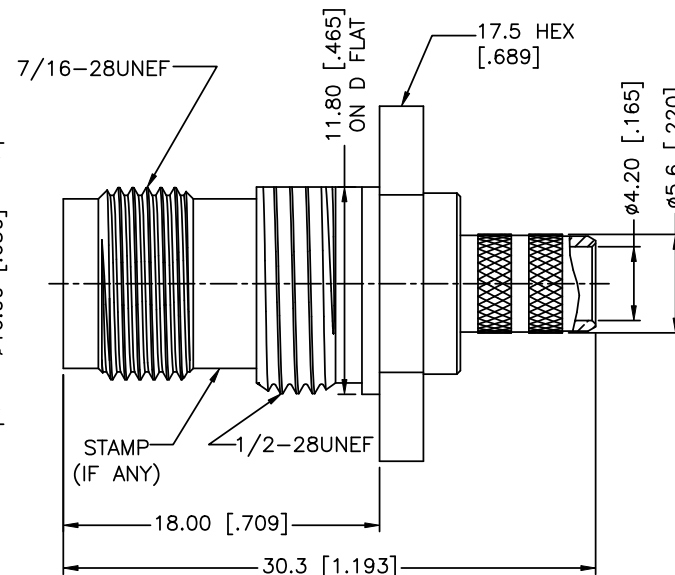

1. CRIMPED FERRULE
HEX CRIMP SIZE .255"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

9	FERRULE	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex PART DESCRIPTION TNC R/P BULKHEAD CRIMP JACK (FOR RG-8X, LMR-240 CABLE)										
8	CONTACT PIN	BRASS	GOLD	1		DRAWN	T.DENG	05/26/11												
7	HEX NUT	BRASS	NICKEL	1		CHECKED														
6	LOCK WASHER	BRASS	NICKEL	1		ISSUED			PART NO.											
5	GASKET	RUBBER	RED	1			SHEET	1 OF 1												
4	BARREL	BRASS	NICKEL	1						122415RP										
3	INSULATOR	PTFE	NATURAL	1				DWG. NO.												
2	BODY	BRASS	NICKEL	1																
1	HOUSING	BRASS	NICKEL	1																
	DESCRIPTION	MATERIAL	FINISH	QTY			CAD FILE		C:/CONNEX/122415RP.DWG		DWG. NO.		122415RP.DWG		REV.	NC	SIZE	A	SCALE	NA