



- NOTES:
1. MATERIALS AND FINISHES:
BODY - BRASS, NICKEL PLATING
CONTACT - BERYLLIUM COPPER, SILVER PLATING
INSULATOR - PTFE
2. ELECTRICAL:
A. DIELECTRIC WITHSTANDING VOLTAGE: 5000 VRMS, MIN.
B. INSULATION RESISTANCE: 5000 MΩ MIN
3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65 °C TO +165 °C
4. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED:
"AMPHENOL, 10400, AND DATE CODE"


RECOMMENDED MOUNTING
HOLE DIMENSIONS

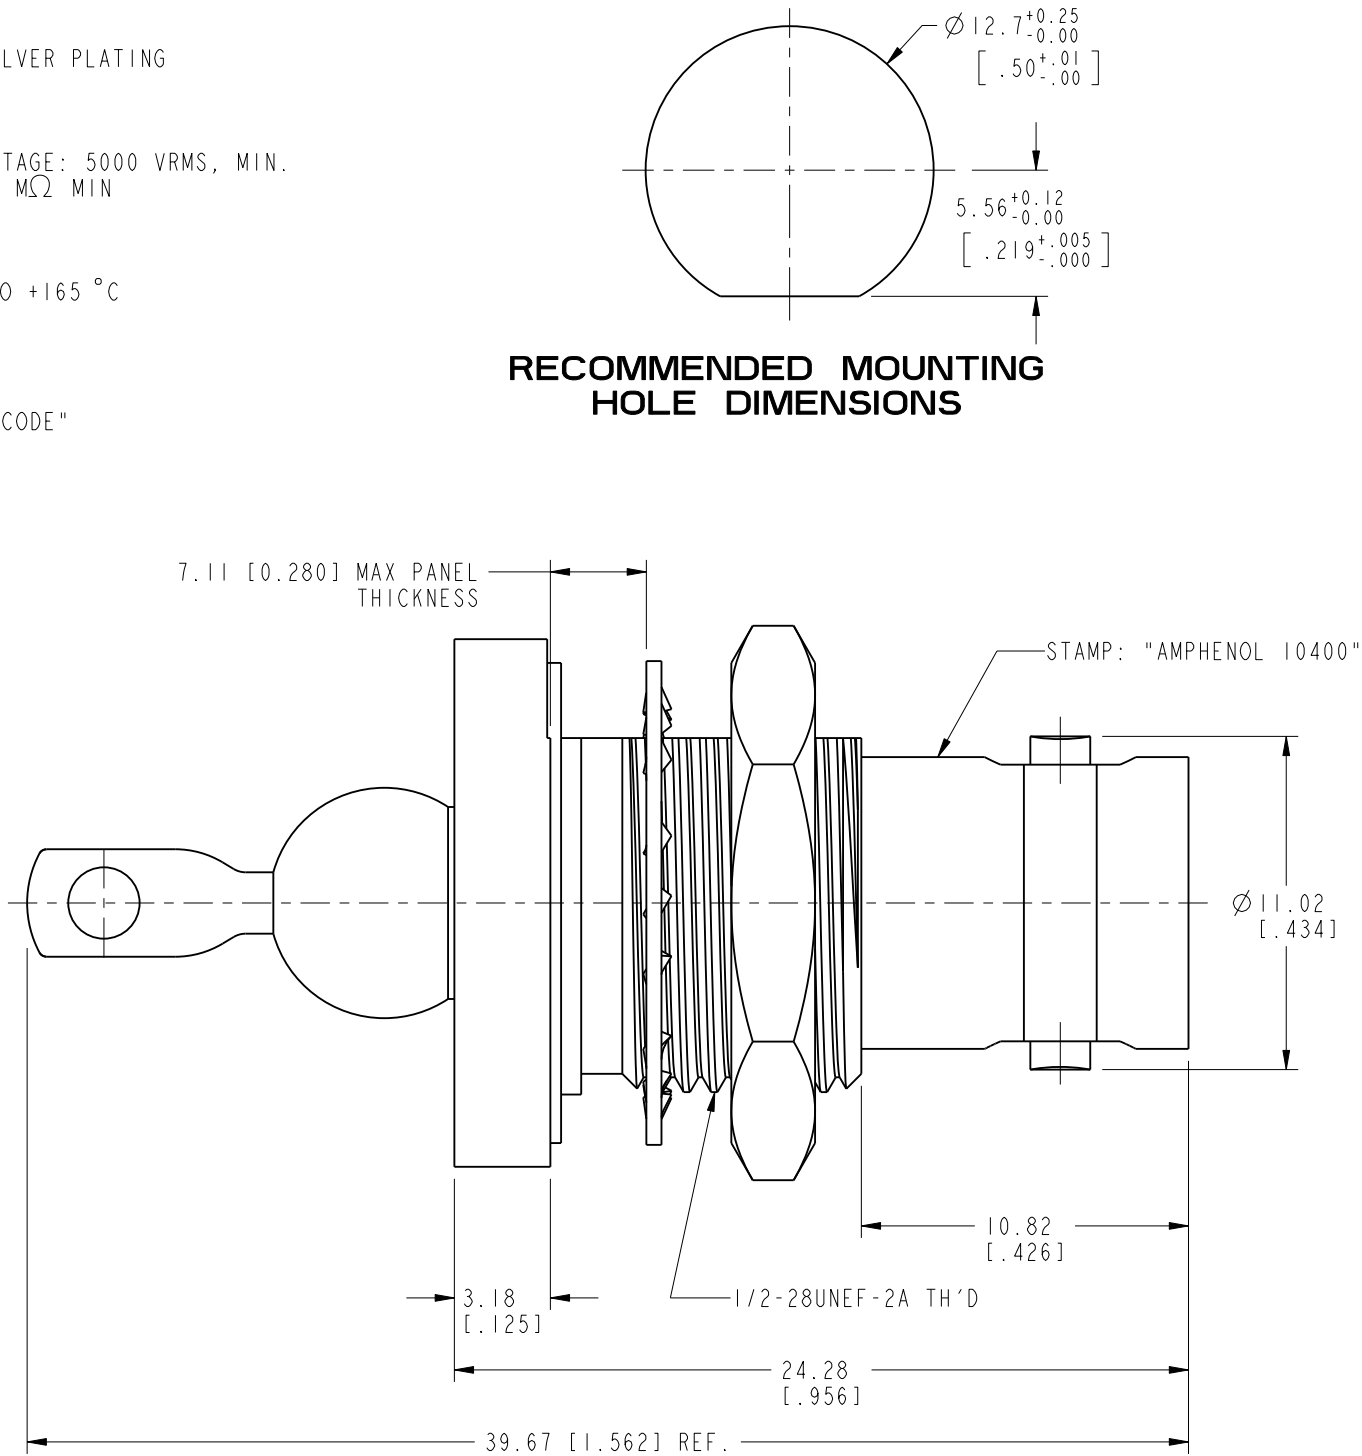

REVISIONS				
REV	DESCRIPTION	DATE	ECO	APPR
--	RELEASE TO MFG	---	---	---
W	REDRAWN IN PRO-E\RD-DAI2032001TI	29-Mar-12	49008	SH

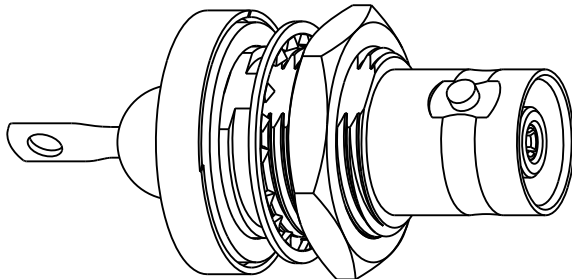

SCALE 2.000

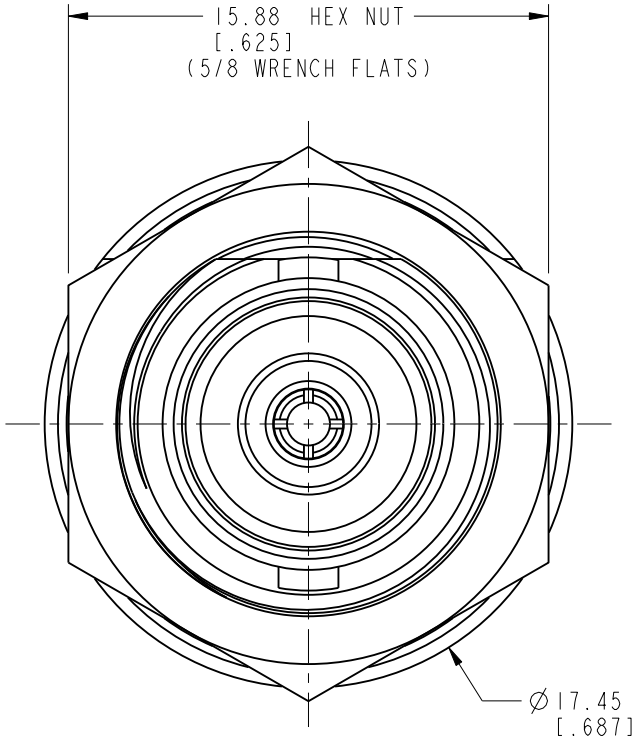

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm ± 0.05mm 0.5 - 6mm ±0.1mm 6 - 30mm ±0.2mm 30 - 120mm ± 0.3mm ANGLES ±1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL SEE NOTES	DRAWN T.DENG	DATE 26-Mar-12	TITLE MHV TYPE PRESSURIZED RECEPTACLE 5000 VOLTS		Amphenol RF www.amphenolrf.com	
	REFERENCE	ENGINEER HH	DATE 19-Dec-60				
		APPROVED S.HSIEH	DATE 29-Mar-12	SCALE: 4.0:1.0 SHEET 2 OF 2		DRAWING NO.10400	
	CONFIGURATION LEVEL:	CAD FILE		DWG SIZE B		REV W	ITEM NO.10400
	FINISH					PART NO.10400	