

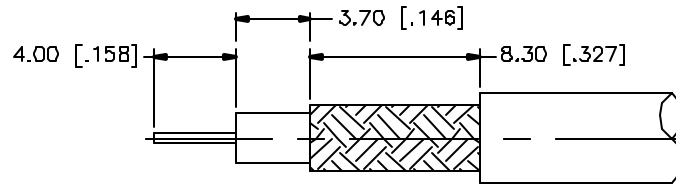
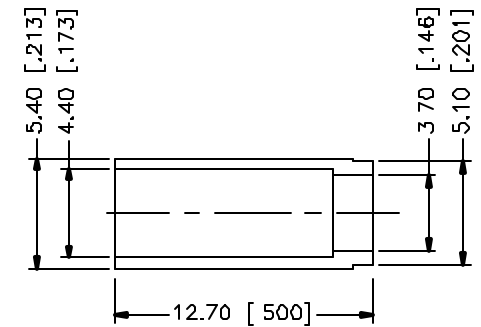


REV.	DATE	DESCRIPTION
A	03/18/05	UPDATE DRAWING FORMAT

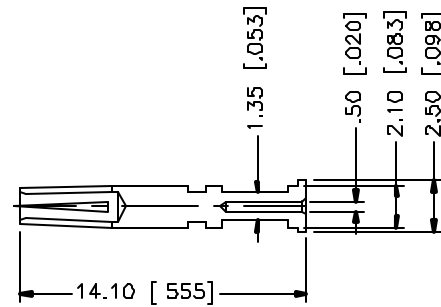

RECOMMENDED
CABLE STRIPPING DIM'S

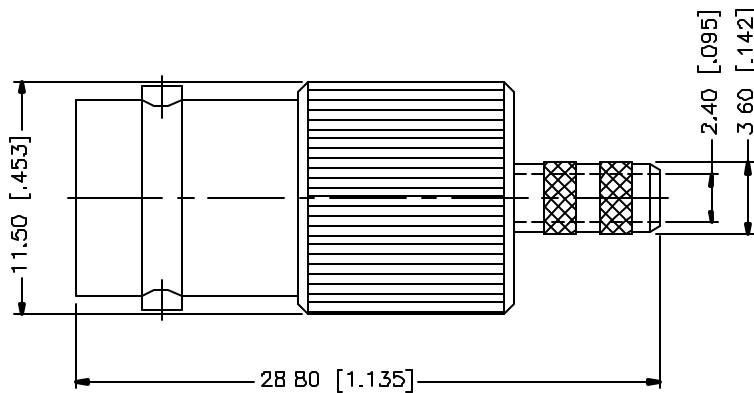

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN () ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	APPROVALS	DATE	Amphenol Connex						
8						DRAWN	G.R.S.						03/18/05	
7						CHECKED			PART DESCRIPTION BNC CRIMP JACK (FOR AT&T 735A - 75ohm)					
6						ISSUED								
5						SHEET	1 OF 1		PART NO. 112974					
4	FERRULE	COPPER	NICKEL	1										
3	CONTACT PIN	PHOS. BRONZE	GOLD	1					DWG. NO. 112974.DWG					
2	INSULATOR	TEFLON	NATURAL	1										REV. A
1	BODY	BRASS	NICKEL	1										
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	C:/112/112974.DWG							