


REV.	DATE	DESCRIPTION
NC	08/01/05	INITIAL RELEASE

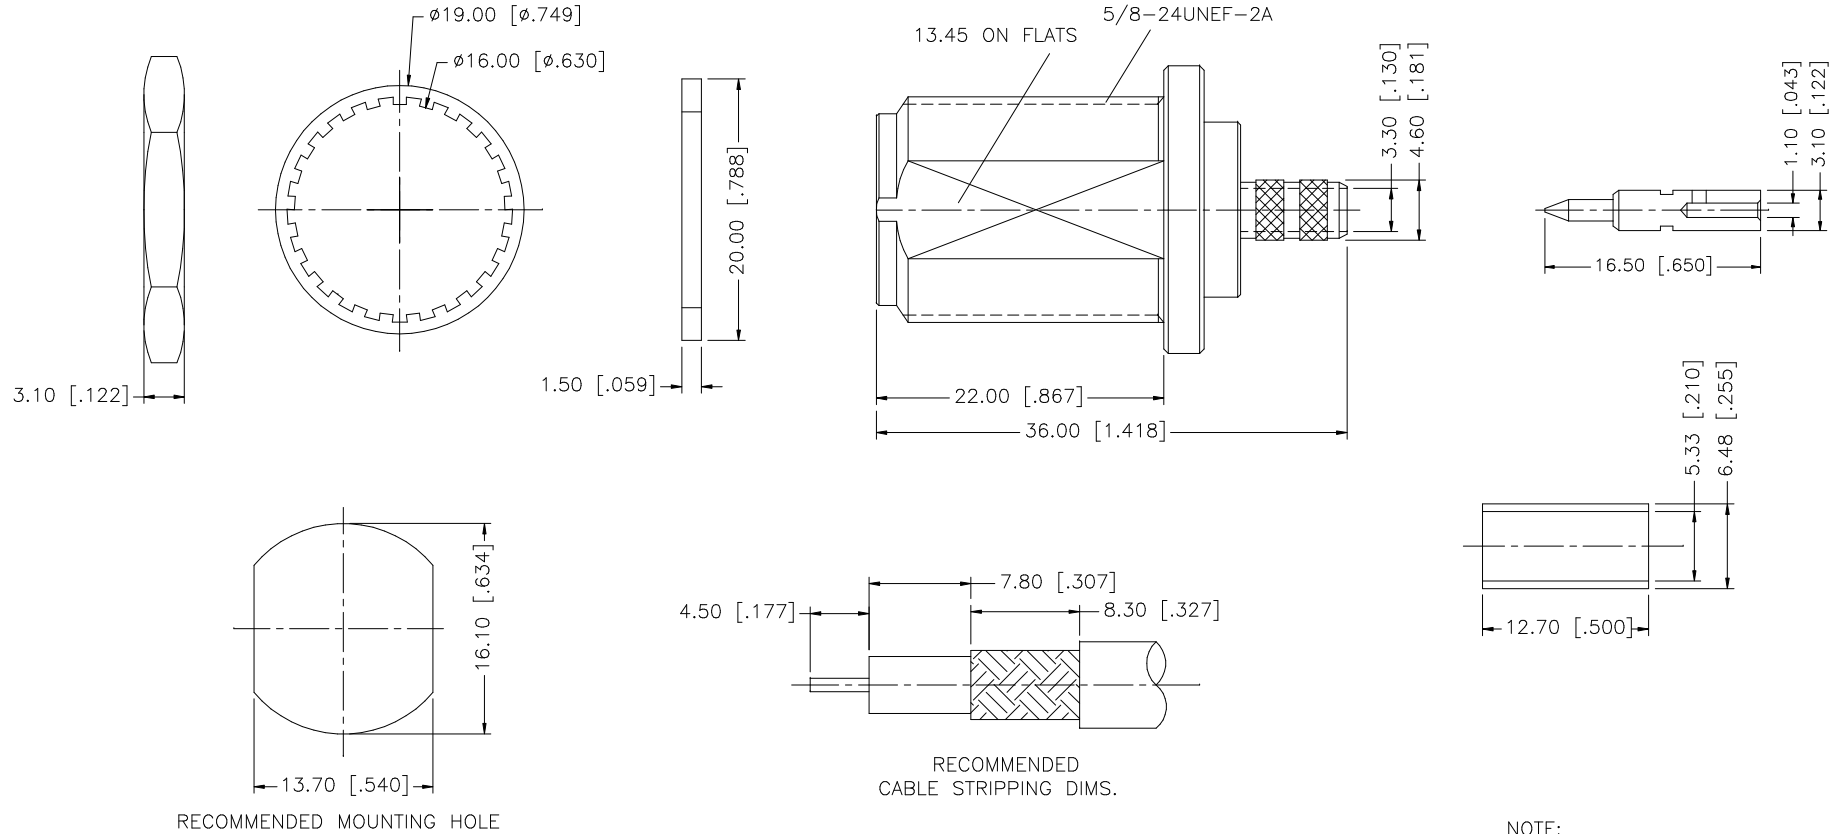

NOTE:

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .105"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex				
8						DRAWN	G.R.S.					
7	FERRULE	COPPER	NEXCOTE	1		CHECKED	PART DESCRIPTION N REVERSE POLARITY BULKHEAD CRIMP JACK (FOR RG–58 CABLE)					
6	HEX NUT	BRASS	NEXCOTE	1		ISSUED						
5	LOCK WASHER	BRASS	NEXCOTE	1		SHEET				1 OF 1		
4	GASKET	SILICONE	RED	1			PART NO. 172106RP					
3	CONTACT PIN	BRASS	GOLD	1								
2	INSULATOR	TEFLON	NATURAL	1		CAD FILE	DWG. NO. 172106RP.DWG			REV. NC	SIZE A	SCALE NA
1	BODY	BRASS	NEXCOTE	1		C:/172/172106RP.DWG						
	DESCRIPTION	MATERIAL	FINISH	QTY								