


NOTES:

1. MATERIAL AND FINISH:
BODY & HEX NUT- BRASS, NICKEL PLATING
CONTACT - PHOSPHOR BRONZE, GOLD PLATING
LOCK WASHER - PHOSPHOR BRONZE, NICKEL PLATING
INSULATOR - PTFE, NATURAL
O-RING - SILICONE RUBBER
FERRULE - COPPER, NICKEL PLATING
HEAT SHRINK TUBING - POLYOLEFIN, BLACK
2. WHEN CRIMPING CONTACT TO CABLE, CRIMP WITH AMPHENOL TOOL
999-227 AND DIE SET 227-1221-57, CAVITY 'B'. HEX CRIMP SIZE .100"
3. CRIMP FERRULE OVER BRAID AND BODY WITH AMPHENOL TOOL
227-944 AND DIE SET 227-1221-57, CAVITY 'A'. HEX CRIMP SIZE .213"
4. THIS CONNECTOR CAN BE USED ON CABLE:
RG55/U, 55A/U, 55B/U, 142U, 142B/U&223/U CABLE
5. INDICATES CABLE ENTRY DIMS.

6. MAX.PANEL THK.6.35 [.250]

7. HST IS ONLY PROVIDED WHEN PROCURED FROM AMPHENOL RF SHENZHEN

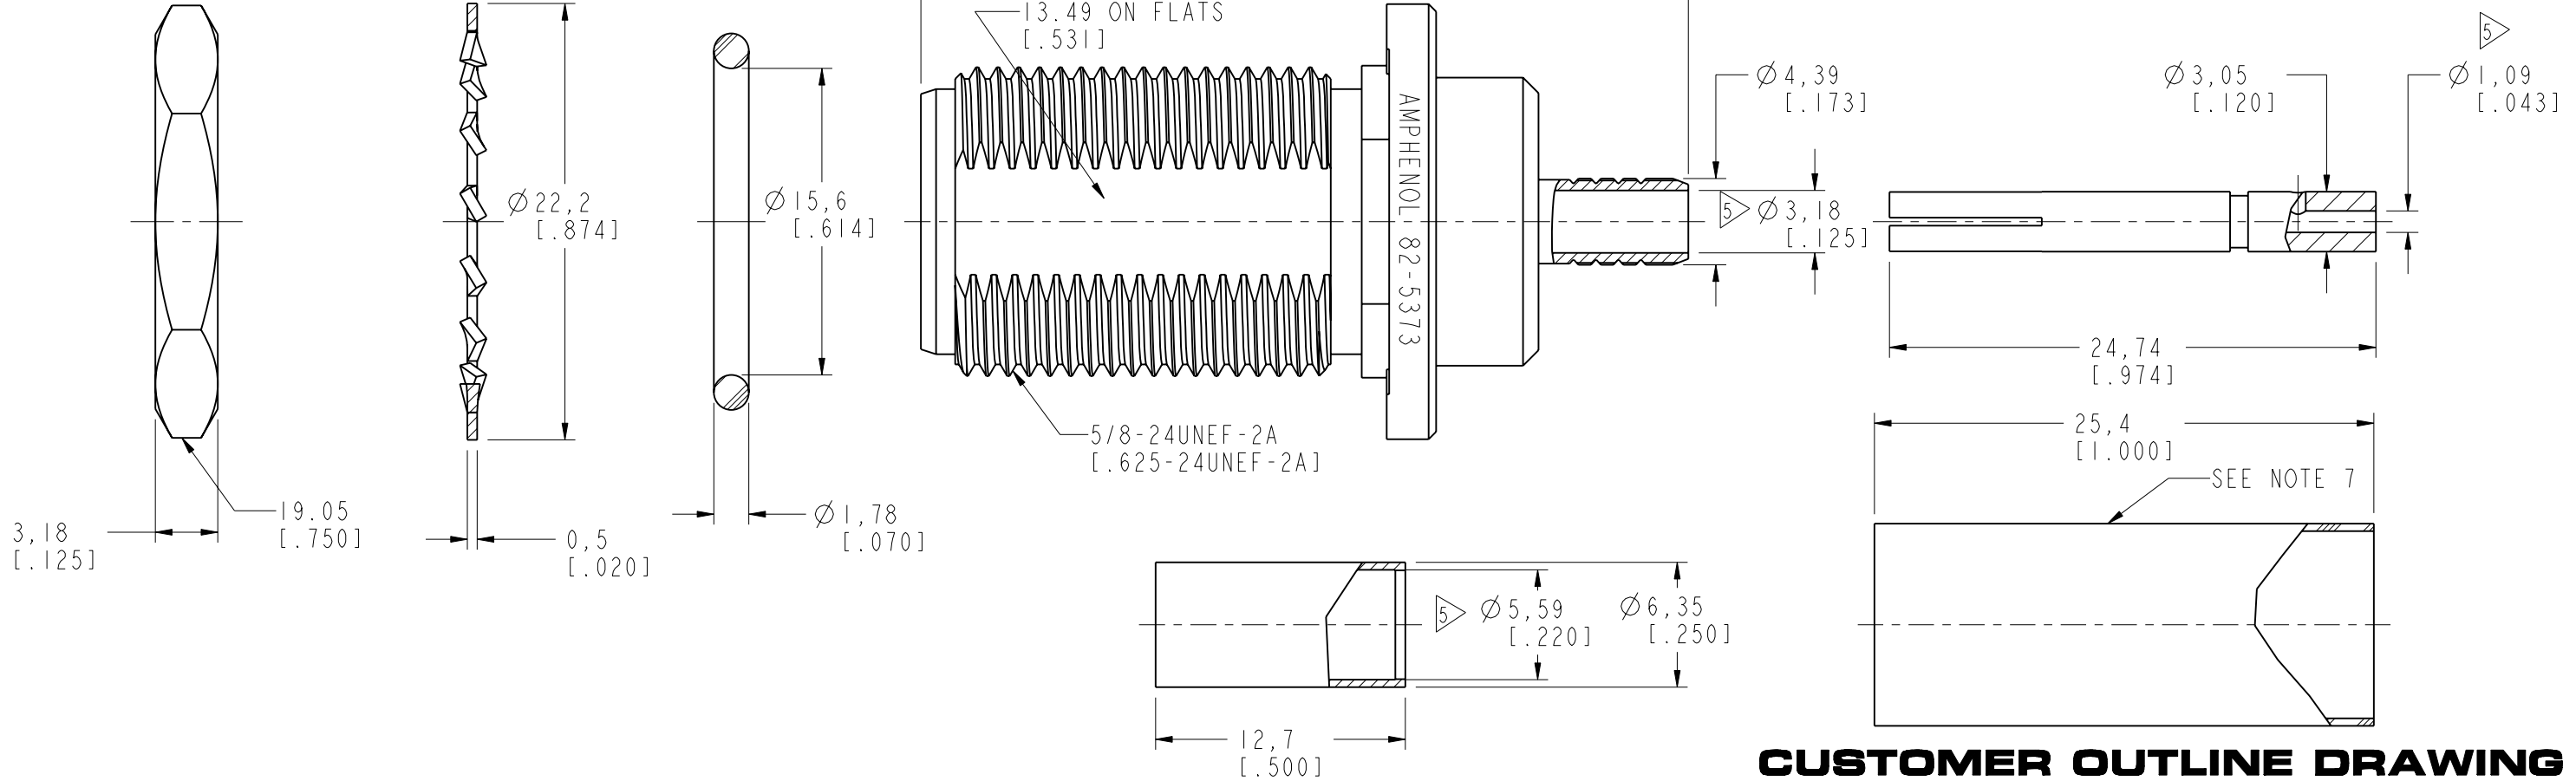

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
<0.5mm ± 0.05mm 0.5 - 6mm ± 0.1mm 6 - 30mm ± 0.2mm 30 - 120mm ± 0.3mm ANGLES ± 1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL
-

REFERENCE
AND
CONFIGURATION LEVEL: ☐☐☐

FINISH

DRAWN
R. MAO

ENGINEER
D. ROYCE

APPROVED
S. HSIEH

CAD FILE

DATE
29-Nov-13

DATE
4/29/92

DATE
29-Nov-13

TITLE
QUICK CRIMP 'N' BULKHEAD
JACK, USED ON RG55/U, 55A/U,
55B/U, 142U, 142B/U&223/U

SCALE: 3.0:1.0
DWG SIZE
B

SHEET 2 OF 2
REV
T

Amphenol RF

www.amphenolrf.com

DRAWING NO. 82-5373

ITEM NO. 82-5373

PART NO. 82-5373