
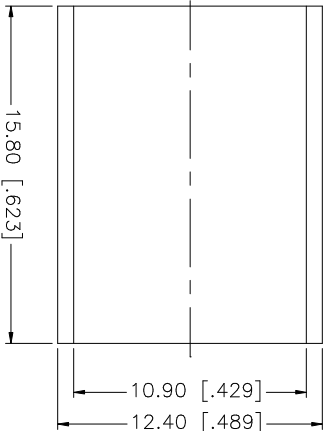
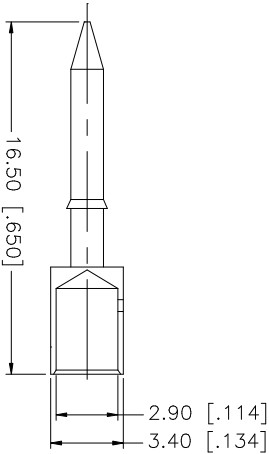
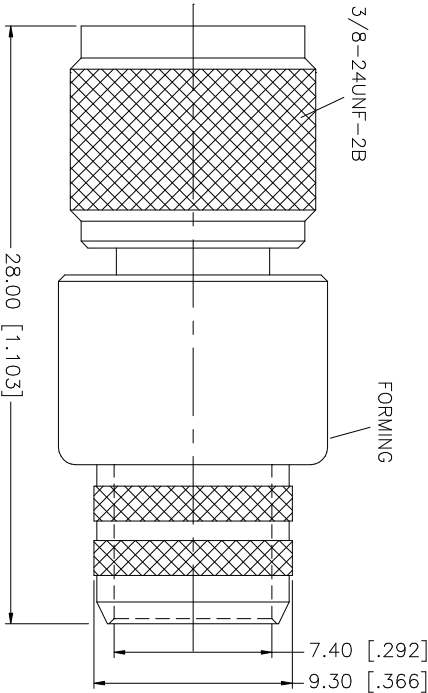


REV.	DATE	DESCRIPTION
NC	01/24/05	INITIAL RELEASE
A	01/19/06	UPDATE PART DESCRIPTION TO INCLUDE "LMR400"

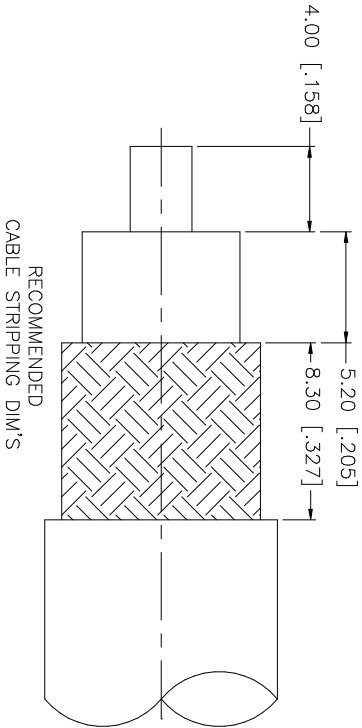

NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .429"
2. CONTACT PIN TO SOLDER.

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex MINI-UHF CRIMP PLUG (FOR RG-8/U, LMR400 CABLE) 182337	
7						DRAWN	G.R.S.		01/19/06
6						UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm			
5						UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"			
4	FERRULE	COPPER	NICKEL	1		UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"			
3	CONTACT PIN	BRASS	GOLD	1		SHEET	1 OF 1		
2	INSULATOR	TEFLON	NATURAL	1		PART NO.			
1	BODY	BRASS	NICKEL	1		PART NO.			
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	DWG. NO.		
						C:/182/182337.DWG	182337.DWG	REV. A	
							SIZE A	SCALE NA	