

NOTES:


1. MATERIALS AND FINISHES:
BODY AND BAYONET SLEEVE - BRASS, NICKEL PLATING
OUTER CONTACT - BeCu, NICKEL PLATING
CONTACT - PHOSPHOR BRONZE, GOLD PLATING
FERRULE - COPPER, NICKEL PLATING
INSULATOR - PTFE
2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC - 6 GHz
C. RETURN LOSS: 30 dB MIN @ 6 GHz
D. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
E. INSULATION RESISTANCE: 10,000 MΩ MIN
3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65° C TO +165° C
4. ENVIRONMENTAL:
A. THERMAL SHOCK PER MIL-STD-202 METHOD 107
TEST CONDITION B (EXCEPT HIGH TEMP @200°C)
B. VIBRATION: MIL-STD-202 METHOD 204 TEST CONDITION B
C. SHOCK: MIL-STD-202 METHOD 213 TEST CONDITION B
D. CORROSION: MIL-STD-202 METHOD 101
TEST CONDITION B 5% SALT SOLUTION
5. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED:
"AMPHENOL RF, 34-5008 DATE CODE
U.S. PATENT NO. 7,553,177"
6. HIGH DENSITY INSTALLATION/REMOVAL TOOL: 227-T2000
7. CABLE ASSEMBLY INSTRUCTIONS:
A. TRIM CABLE AS SHOWN.
B. SOLDER CONTACT TO CABLE CENTER CONDUCTOR.
C. CRIMP FERRULE WITH .128" HEX.

8 SHOWS CABLE ENTRY DIMENSIONS.



THIRD ANGLE PROJ. 

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG.	09-Apr-13	49282	AAP
B	"22.29MM" WAS "20.15MM"; INCREASED PRESS FIT LENGTH\RD-DM15112401M	01-Dec-15	50626	JN
C	OPTIMIZATION BODY AND OUTER CONTACT STRUCTURE \RD-DM17042701S2	18-Apr-17	03588	KEN

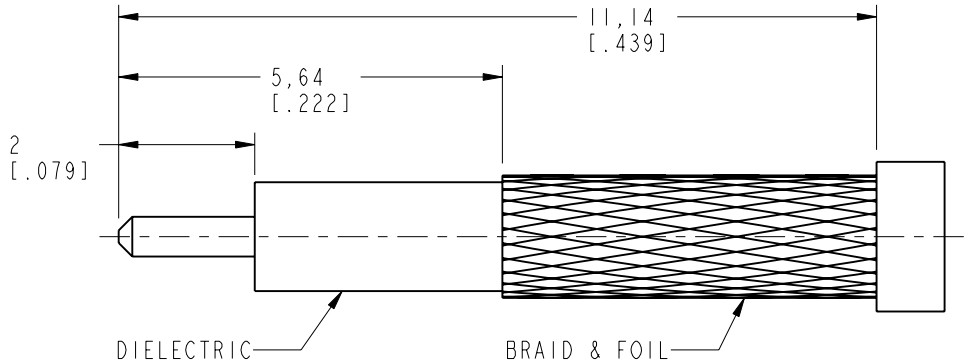

RECOMMENDED CABLE
STRIPPING DIMENSIONS

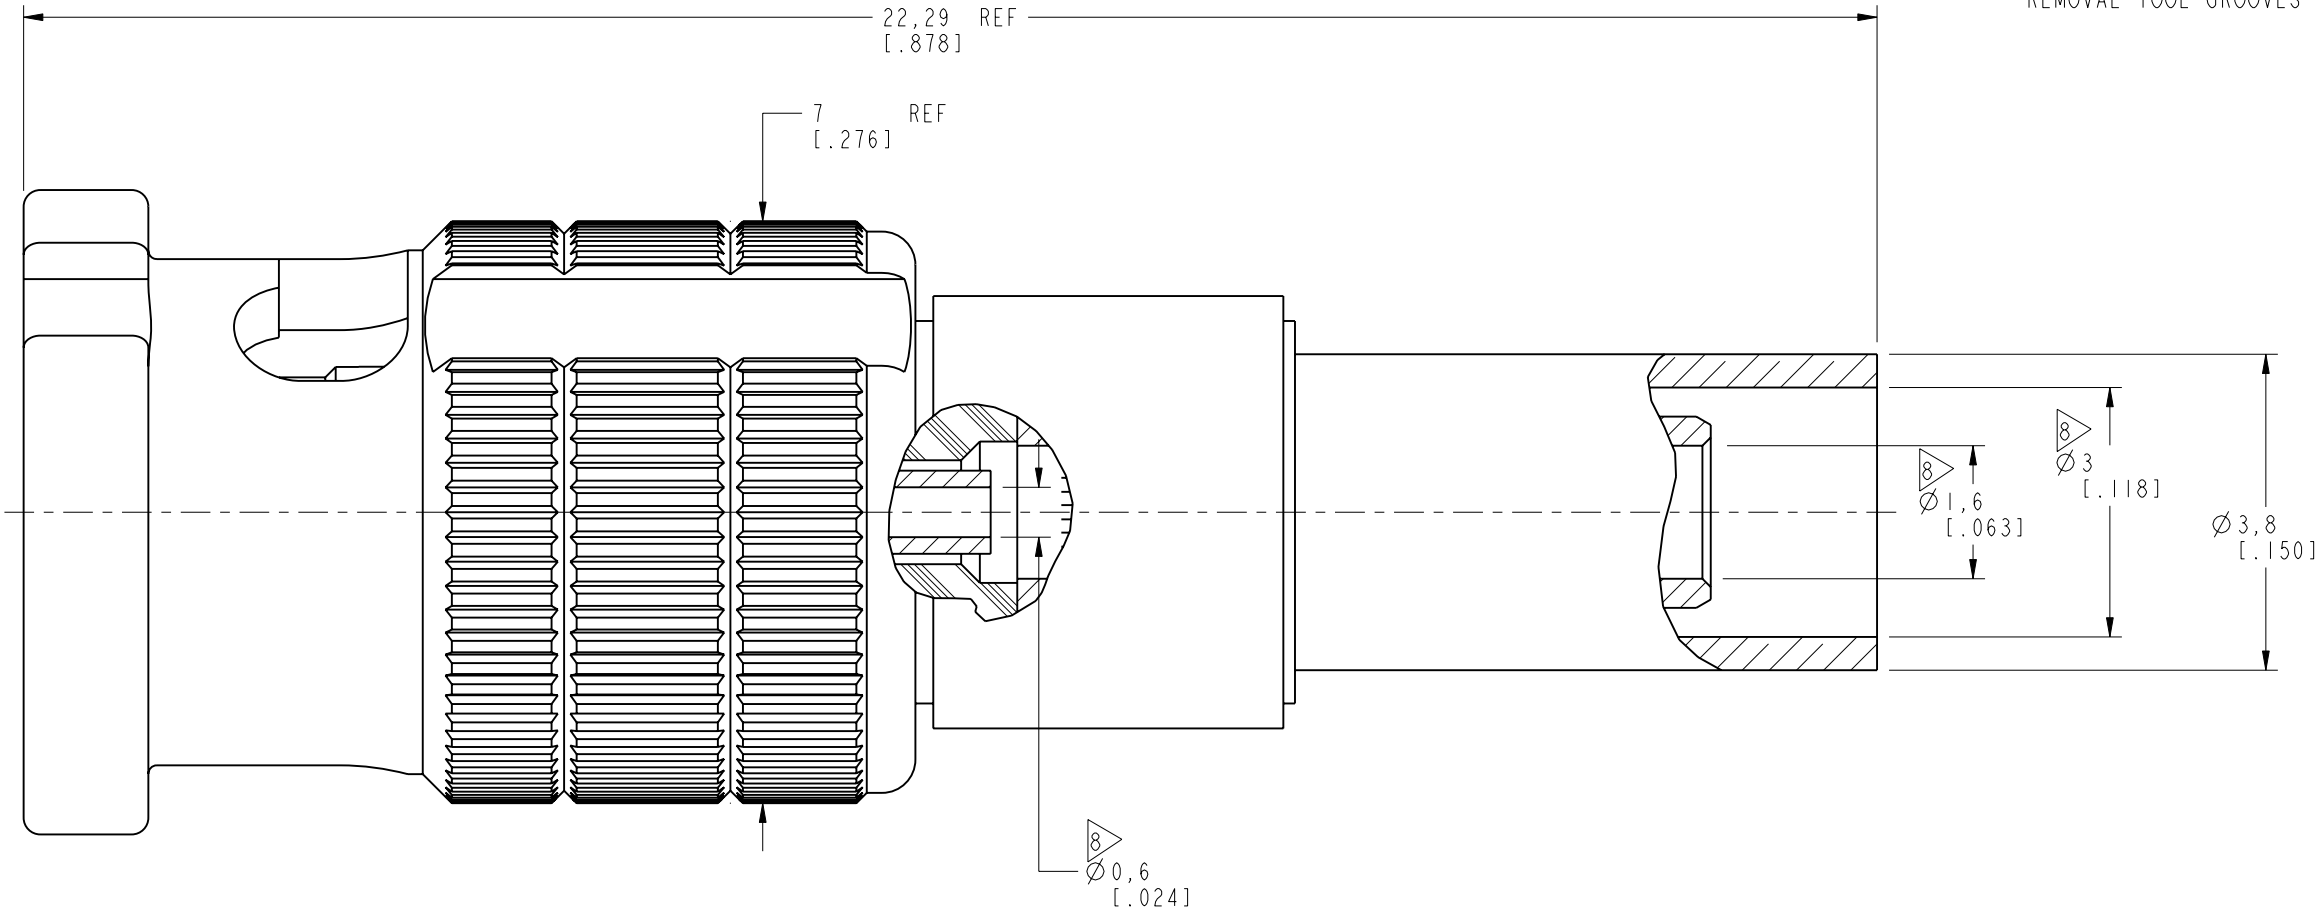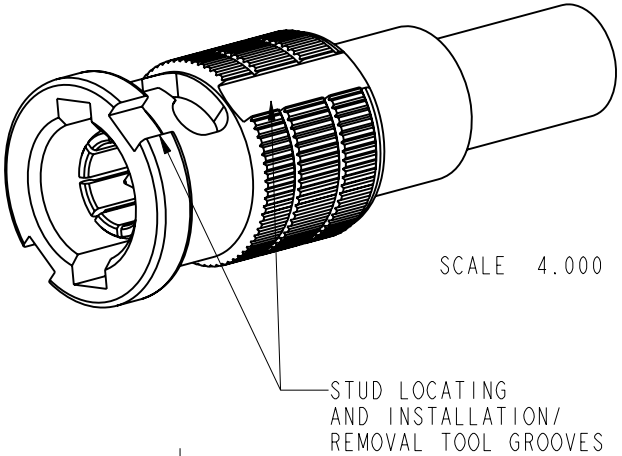

PROTECTED UNDER U.S. PATENT # 7,553,177

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
<0.5mm ± 0.05mm 0.5 - 6mm ± 0.1mm 6 - 30mm ± 0.2mm 30 - 120mm ± 0.3mm ANGLES ± 1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implicatioin or otherwise in any manner licensing, granting rights to permitting such holder or any other sperson to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL	SEE NOTES
REFERENCE	EAR # 4398
CONFIGURATION LEVEL:	In Work
FINISH	

DRAWN	S.DUAN	DATE	27-Apr-17
ENGINEER	A ARUN PRABU	DATE	21-Apr-11
APPROVED	S.HSIEH	DATE	08-May-17
CAD FILE			

TITLE	
50 OHM HD-BNC STR PLUG FOR RG 316 CABLE	
SCALE: 11.0:1.0	SHEET 2 OF 2
DWG SIZE B	REV C

Amphenol RF www.amphenolrf.com	
DRAWING NO. 34-5008	
ITEM NO. 34-5008	
PART NO. 34-5008	