
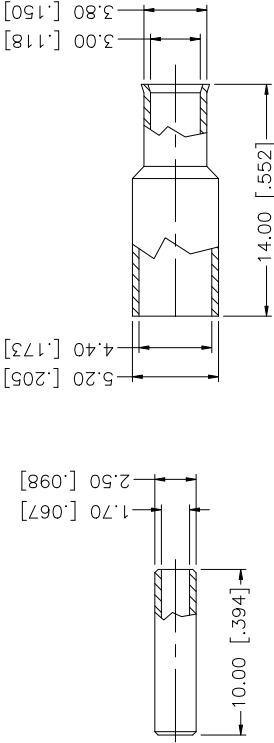


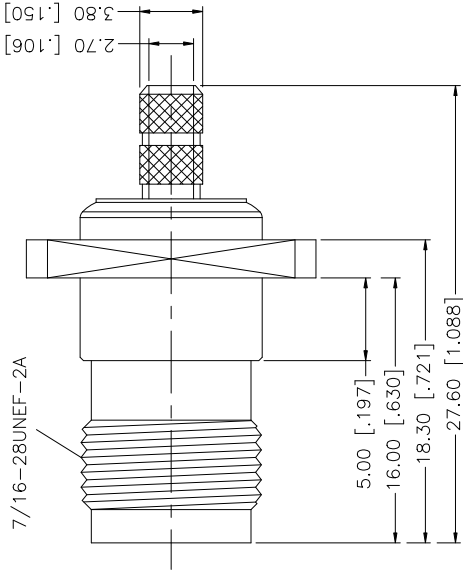
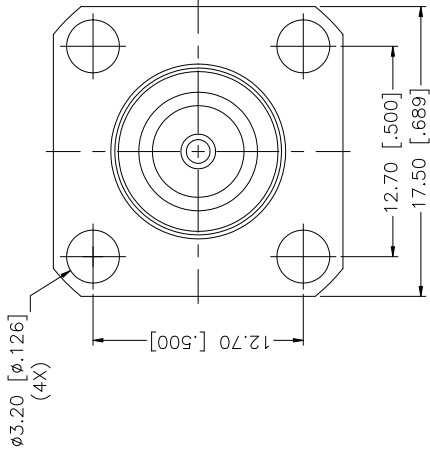


REV.	DATE	ECR NO.	DESCRIPTION
NC	09/29/04	-	INITIAL RELEASE
A	12/28/08	-	DESIGN CHANGE - ADD INSULATOR

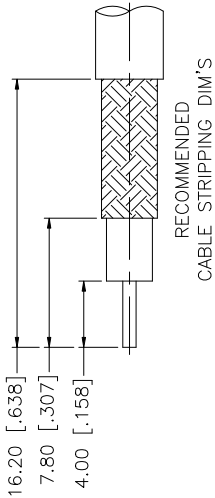

- NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .178" [4.52]
 2. CRIMPED CONTACT PIN HEX CRIMP SIZE .068" [1.73]

Amphenol Connex									
TNC PANEL CRIMP JACK (RG-174/U, 188A/U, 316/U)									
PART DESCRIPTION									
PART NO.									
122246									
DWG. NO.									
122246.DWG									
REV. A									
SIZE A									
SCALE NA									

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.									
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:									
0.5 — 8mm ± 0.20mm									
8 — 30mm ± 0.40mm									
30 — 120mm ± 0.50mm									
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:									
.020 — .315 = ± 0.007"									
.315 — 1.180 = ± 0.015"									
1.180 — 4.724 = ± 0.020"									
DO NOT SCALE DRAWING									
CAD FILE C:/122/122246.DWG									
DWG. NO.									
122246.DWG									
REV. A									
SIZE A									
SCALE NA									

Amphenol Connex

TNC PANEL CRIMP JACK
(RG-174/U, 188A/U, 316/U)

122246

NA