

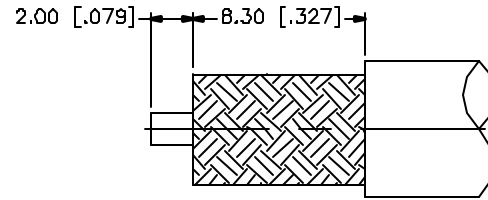
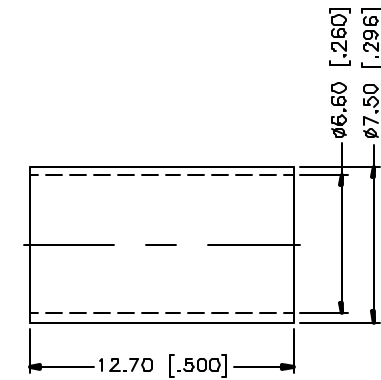


REV.	DATE	DESCRIPTION
NC	07/09/99	INITIAL RELEASE
A	05/01/04	UPDATE DRAWING FORMAT



RECOMMENDED
CABLE STRIPPING DIM'S

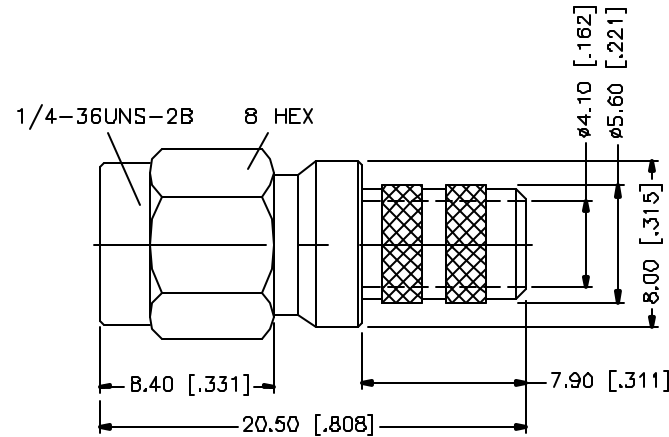

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
8					DRAWN	G.R.S.	05/01/D4						
7					CHECKED					PART DESCRIPTION			
6					ISSUED					SMA REVERSE POLARITY CRIMP PLUG (FOR BELDEN RG-8/X, TIMES LMR-240MA)			
5					SHEET	1 OF 1				PART NO. 132231RP			
4				CAD FILE		C:/132/132231RP.DWG		DWG. NO		132231RP.DWG	REV. A	SIZE A	SCALE NA
3	FERRULE	COPPER	GOLD	1									
2	CONTACT PIN	BER. COPPER	GOLD	1									
1	SHELL/BODY	BRASS	GOLD	1									
DESCRIPTION				MATERIAL	FINISH	QTY							