
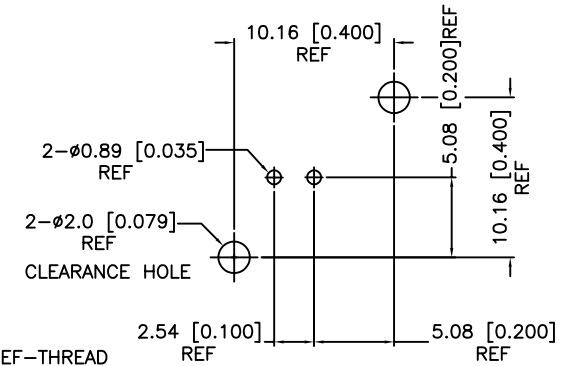
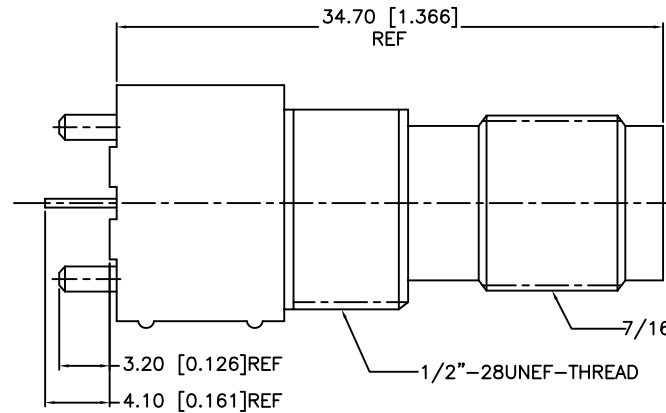



REV.	DATE	DESCRIPTION
A	03-Mar-10	RELEASE TO MFG.



RECOMMENDED P.C.B LAYOUT

SPECIFICATIONS:
MECHANICAL CHARACTERISTICS:
MATING/UNMATING – 500 CYCLES

ELECTRICAL CHARACTERISTICS:
NORMAL IMPEDANCE – 50 OHMS
FREQUENCY RANGE – 0-1 GHZ
OPERATING VOLTAGE – 500 VOLTS RMS
INSULATION RESISTANCE – 5000 MEGOHMS MIN.

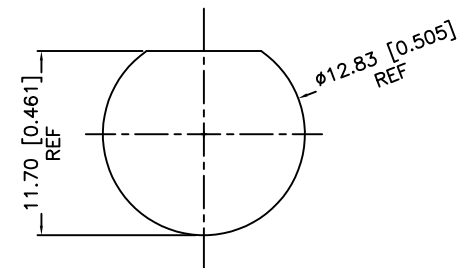

PANEL CUTOUT

RoHS COMPLIANCE

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		AMPHENOL CONNEX							
						DRAWN	CLEMENT	03-Mar-10									
						CHECKED			PART DESCRIPTION TNC VERTICAL PCB MOUNT RECEPTACLE IMPEDANCE 50 OHM								
						ISSUED											
						SHEET	1 OF 1		PART NO. 122956								
						CAD FILE C:\122\122956.DWG		DWG. NO.		122956.DWG		REV.	A	SIZE	A	SCALE	NA
6	GROUNDING TERMINAL	STRIP COPPER	TIN	1													
5	MOUNTING HOOK	BRASS	TIN	1													
4	HOUSING	PBT+30%G.F (UL 94 V-0)	WHITE	1													
3	INSULATOR	POLYPROPYLENE UL 94HB	NATURAL	1													
2	CENTER CONTACT	PHOSPHOROUS BRONZE	GOLD	1													
1	CONN.BODY	ZINC ALLOY	NICKEL	1													
NO	DESCRIPTION	MATERIAL	FINISH	QTY													

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING