

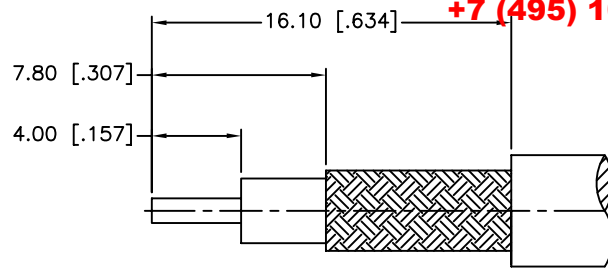
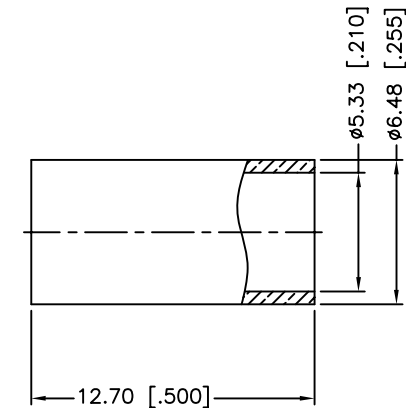


REV.	DATE	ECR NO.	DESCRIPTION
NC	07/29/98	–	INITIAL RELEASE
A	11/05/06	–	UPDATE DRAWING FORMAT
B	06/23/10	2062	ADD CRIMP DIMENSIONS AND CRIMP TOOL INFORMATION TO DRAWINGS

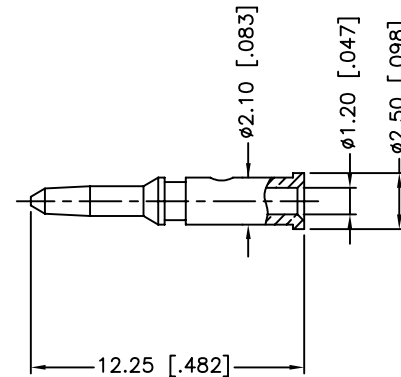

RECOMMENDED
CABLE STRIPPING DIM'S

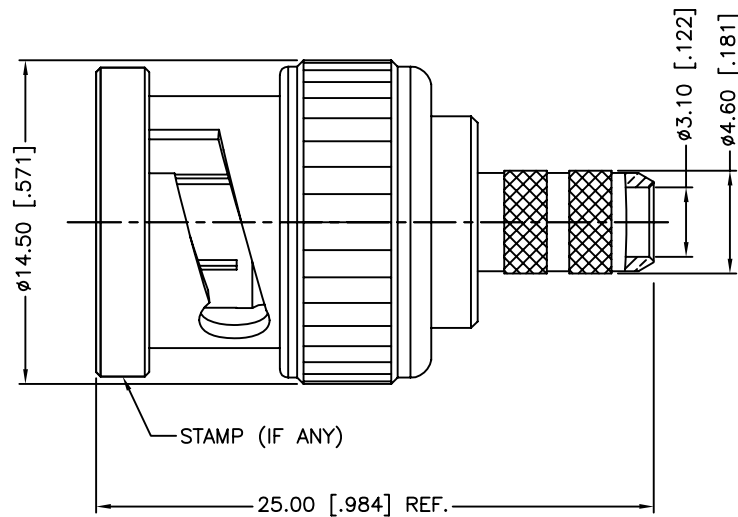

1. CRIMPED FERRULE
HEX. CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
HEX. CRIMP SIZE .068"
3. CRIMP TOOL: A

9	FERRULE	COPPER	NICKEL	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex					
8	CONTACT PIN	BRASS	GOLD	1		DRAWN	M.ZHANG	06/23/10							
7	WASHER	BRASS	NICKEL	1		CHECKED			PART DESCRIPTION BNC CRIMP PLUG (FOR LMR200 CABLE)						
6	SPRING	SK5	NICKEL	1		ISSUED									
5	RETAINER RING	BRASS	NICKEL	1		SHEET	1 OF 1			PART NO. 112597					
4	GASKET	RUBBER	RED	1											
3	INSULATOR	PTFE	NATURAL	1					DWG. NO. 112597.DWG						
2	BODY	BRASS	NICKEL	1				REV. B						SIZE A	
1	SHELL	BRASS	NICKEL	1											
	DESCRIPTION	MATERIAL	FINISH	QTY				CAD FILE C:/CONNEX/112597.DWG							