



NOTES:

- ELECTRICAL:
 - IMPEDANCE: 50 OHM
 - DIELECTRIC WITHSTANDING VOLTAGE:1500 VRMS. MIN.
- MECHANICAL:
 - DURABILITY:500 CYCLES MIN.
 - TEMPERATURE RANGE:-65°C TO +165°C
- CONTACT PIN TO SOLDER






REV.	DATE	ECR. NO.	DESCRIPTION
NC	03/06/03	XXXXXX	INITIAL RELEASE
A	01/24/06	XXXXXX	ADD 50 OHM TO DESCRIPTION/UPDATE DRAWING FORMAT
B	12/03/08	100062	REVISE CABLE STRIPPING TO 4.5/CONTACT PIN TO 13.75
C	02/25/13	2452	CORRECT MINOR DIMENSIONAL ERRORS, SHOW CONTACT CAPTIVATION NOTCH, UPDATE DRAWING FORMAT



RECOMMENDED
CABLE STRIPPING DIM'S

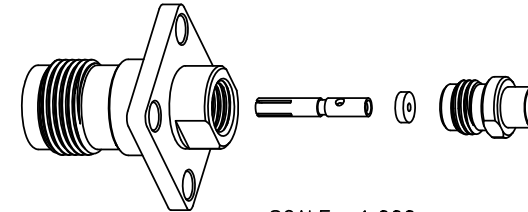

SCALE 1.000

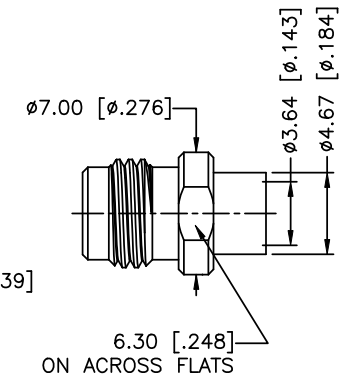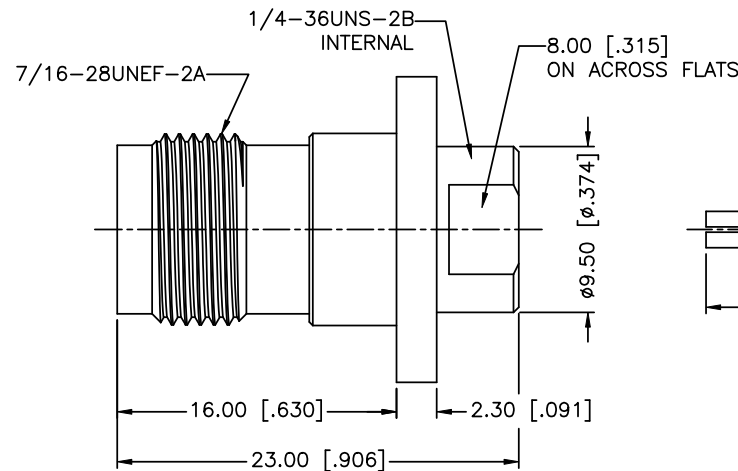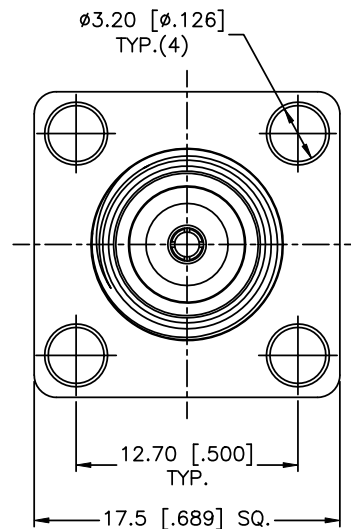

5	SOLDER NUT	BRASS	GOLD	1
4	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
3	INSULATOR	PTFE	NATURAL	2
2	BODY	BRASS	NICKEL	1
1	HOUSING	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS		DATE
DRAWN	T.DENG	02/25/13
CHECKED		
ISSUED		
SHEET	1 OF 1	
CAD FILE	C:/CONNEX/122419.DWG	

Amphenol Connex

PART DESCRIPTION

TNC PANEL DIRECT SOLDER JACK
(FOR .141" SEMI RIGID CABLE)

PART NO.

122419

DWG. NO.

122419.DWG

REV.

C

SIZE

A

SCALE

NA