



- NOTES:
1. MATERIALS AND FINISHES:
BODIES - BRASS, NICKEL PLATING
CONTACT - BeCu, GOLD PLATING
INSULATOR - PTFE
2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC - 6 GHz
C. VSWR: 1.10 MAX @ 6 GHz
3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65° C TO +165° C
4. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL RF, APH-HDBNCJ-SMAJ, AND DATE CODE"

THIRD ANGLE PROJ.		REVISIONS			
REV	DESCRIPTION	DATE	ECO	APPR	
A	RELEASE TO MFG.	05-Apr-13	49282	MG	

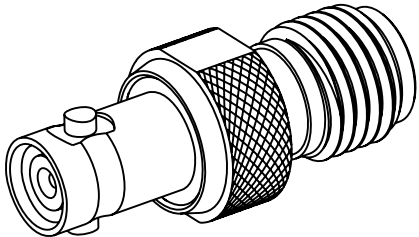

SCALE 3.000

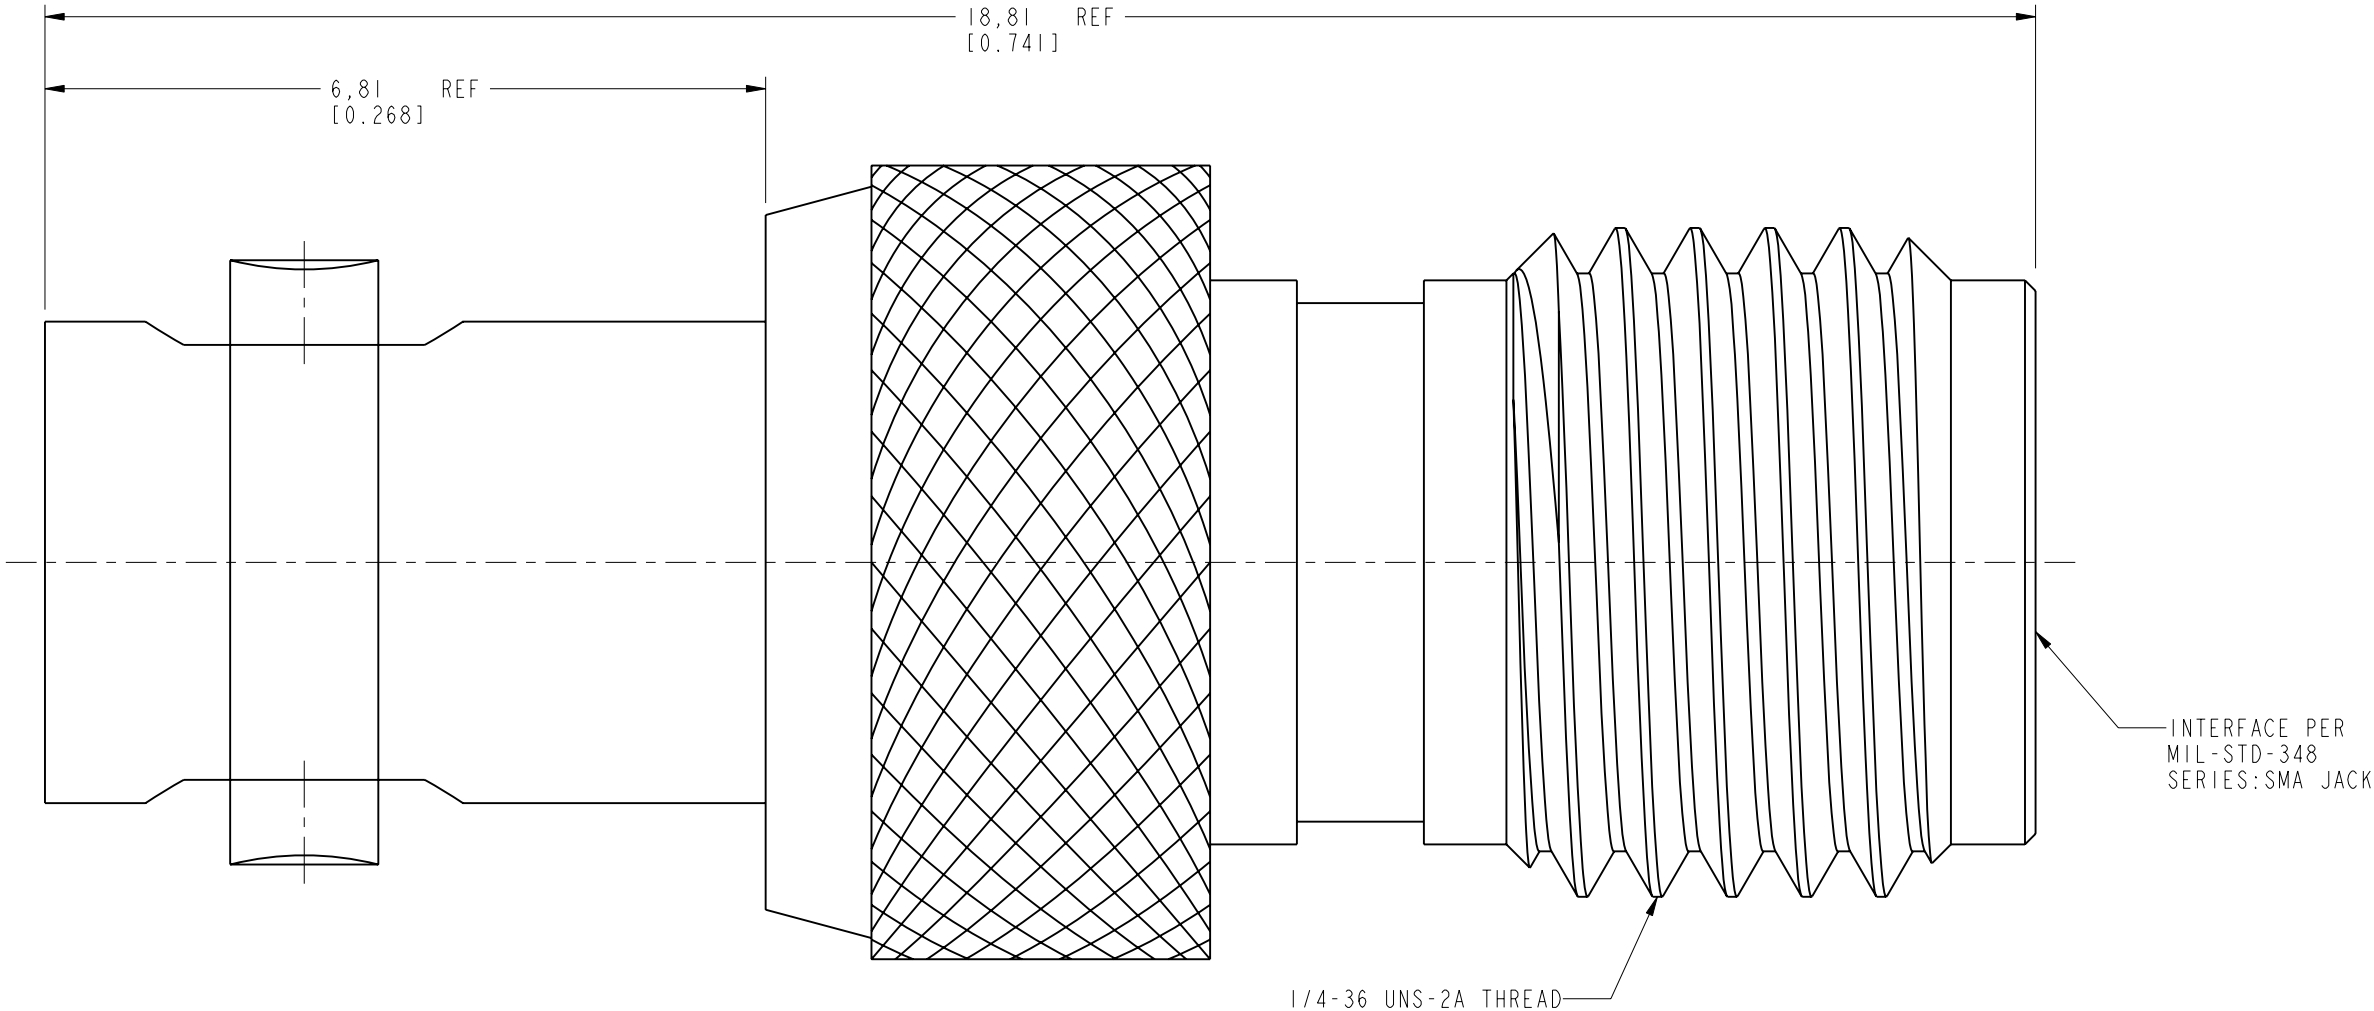

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ± 0.05mm ±0.1mm ±0.2mm ± 0.3mm ±1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implicatioin or otherwise in any manner licensing, granting rights to permitting such holder or any other sperson to manufacture, use or sell any product, process or design, patented or otherwsie, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL SEE NOTES	DRAWN S.L.I	DATE 05-Apr-13	TITLE 50 OHM HD BNC JACK TO SMA JACK ADAPTER		Amphenol RF www.amphenolrf.com	
		ENGINEER KARTHIK R	DATE 15-Jun-11				
	REFERENCE EAR # 4800	APPROVED H.HE	DATE 10-Apr-13	SCALE: 14.0:1.0		SHEET 2 OF 2	DRAWING NO.APH-HDBNCJ-SMAJ
	CONFIGURATION LEVEL: ☐ ☐ ☐	CAD FILE	DWG SIZE B		REV A	ITEM NO.APH-HDBNCJ-SMAJ	
	FINISH						PART NO.APH-HDBNCJ-SMAJ