

NOTES:


- MATERIALS AND FINISHES(PLATING THICKNESS IN MICRO-INCHES):
BODY – BRASS, ALBALOY PLATING
CONTACT – BERYLLIUM COPPER, GOLD PLATING
INSULATOR – PTFE, NATURAL
- ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC 0–6 GHz
C. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
- MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: –55°C to +165°C

THIRD ANGLE PROJ.



REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
B	1.9±0.25 WAS 1.9±0.05	07-Oct-05		ROCKY
C	SEE SHEET 1	10-Nov-06		JEKY
D	SEE SHEET 1	31-Dec-07		KATE
E	SEE SHEET 1	31-Aug-09		SCOTT.H

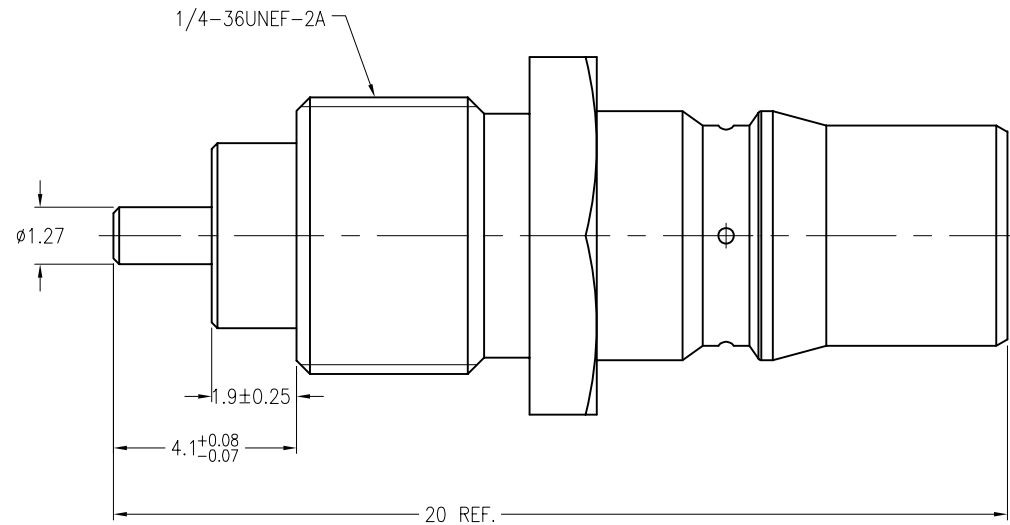

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: 0.5 – 6mm ±0.1mm 6 – 30mm ±0.2mm 30 – 120mm ± 0.3mm ANGLES ±1°	MATERIAL	DRAWN S.XIE	DATE 21-Aug-09	TITLE QMA(F) STR BULKHEAD RCPT FRONT MOUNT			Amphenol RF	
		ENGINEER CISSY	DATE 31-Dec-07				Danbury CT USA, Tainan Taiwan, Shenzhen China www.amphenolrf.com	
		REFERENCE	APPROVED SCOTT.H	DATE 21-Aug-09	SCALE: 6/1	SHEET 2 OF 2	DRAWING NO.	930-127J-51S
		FINISH	F:\DWG\CNPD\930\127J\51S-ESZ		DWG SIZE B	CODE ID 74868	REV E	PART NO. 930-127J-51S