
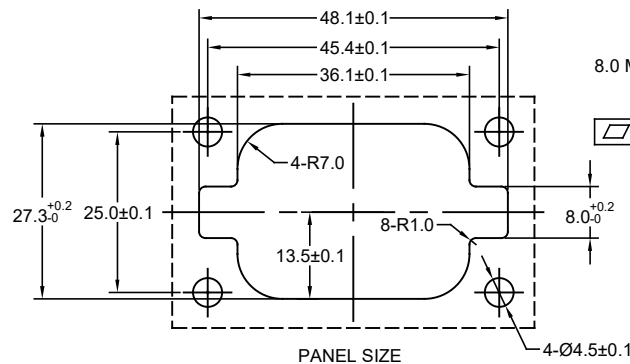
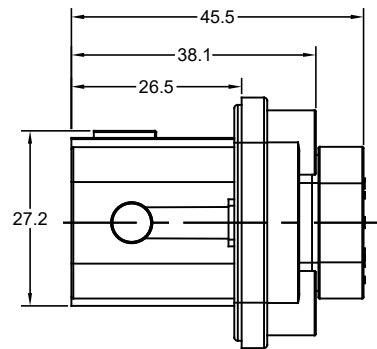
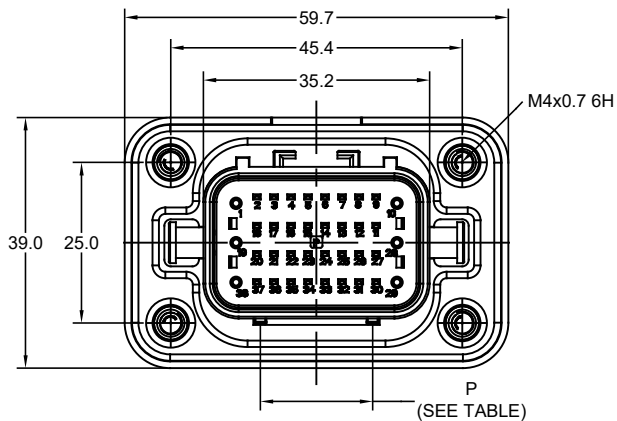


REVISIONS					
REV	ECO	DESCRIPTION	DATE	BY	APPR
A1	-	RELEASED DRAWING	Jul-30-2019	Flan	Tommy
A2	-	UPDATE DRAWING	Aug-9-2019	Flan	Tommy
A3	-	UPDATE DRAWING	Oct-15-2019	Flan	Tommy
A4	-	UPDATE DRAWING	Nov-12-2019	Flan	Tommy
A5	-	UPDATE DRAWING	Jun-29-2020	Ronald	Tommy

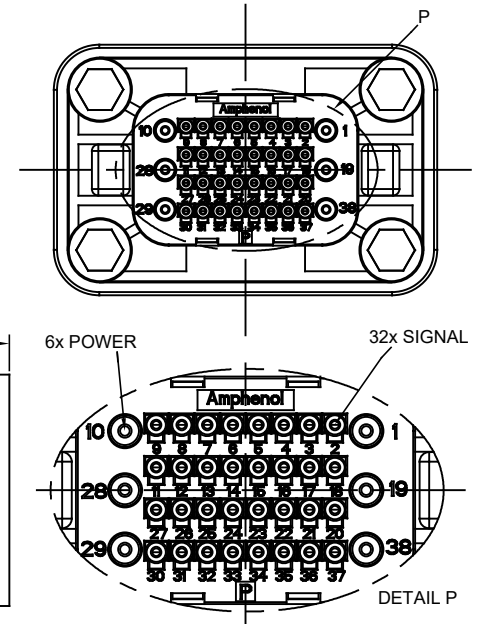

NOTES: (UNLESS OTHERWISE SPECIFIED)

- MATERIAL:
SHELL: THERMOPLASTIC, UL94 V-0, GRAY.
CONTACT LOCATING COVER: THERMOPLASTIC, UL94 V-0, GREEN.
GASKET: SILICONE RUBBER, RED.
WIRE SEAL: SILICONE RUBBER.
END CAP: THERMOPLASTIC, UL94 V-0, GRAY.
- SPECIFICATIONS:
2.1 RATED CURRENT:
POWER: 13A (MAX).
SIGNAL: 5A (MAX).
2.2 RATED VOLTAGE (CLASS OF POLLUTION II): 250V (AC/DC).
2.3 OPERATING TEMPERATURE: -40°C ~ +125°C.
2.4 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN
2 MILLIAMPS CURRENT LEAKAGE @2000 VOLTS AC.
2.5 INSULATION RESISTANCE: 500 MEGOHMS MIN.
2.6 IP-CLASS: IP67 (MATED CONDITION).
2.7 MATING CYCLES DURABILITY: 500 CYCLES.
2.8 RoHS COMPLIANT.
- ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.
- PART NUMBER AND WIRE RANGE:

PART NUMBER	SIGNAL (WIRE & OD RANGE)	POWER (WIRE & OD RANGE)	WIRE SEAL COLOR
ATV04-38P*-S1	Ø1.2~1.5mm (22AWG)	Ø1.6~2.8mm (22~14AWG)	GREEN
ATV04-38P*-S2	Ø1.5~1.8mm (20AWG)		RED

***DENOTES KEY WAY. CONTACT SIZE: SIGNAL SC000571x; POWER SP20M1x, SP16M1x, SP14M1x.
RECOMMENDED TO CHOOSE HARD WIRE, SUCH AS FEP INSULATION AND XLPE INSULATION.

TABLE

KEY POS	P
A	17.50
B	14.50
C	11.50

QUANTITY	PART NUMBER	DESCRIPTION	ITEM
MATERIALS LIST			
UNLESS OTHERWISE SPECIFIED		SIGNATURES	
1) All dimensions are in metric (mm).		DATE	
2) Tolerances are as follows:		DRAWN: Ronald Jun-29-2020	
1 PL DEC ±0.30		CHECKED: Flan Jun-30-2020	
2 PL DEC ±0.15		ENGINEER:	
3 PL DEC ±0.08		APPROVAL: Tommy Jun-30-2020	
3) Note reference =		CUSTOMER:	
MATERIAL SPECIFICATIONS:		THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.	
PROCESS SPECIFICATIONS:		SIZE: B TYPE: C- DWG NO: ATV04-38P*-Sx REVISION: A5	
NEXT ASSY:		SCALE: NONE SHEET 1 OF 1	

TITLE: DURALOK ATV RECEPTACLE, 38 POS, PIN
DWG NO: ATV04-38P*-Sx
REV: A5
SH: 1
OF: 1

Amphenol

Sine Systems - www.amphenol-sine.com
44724 Morley Drive
Clinton Township, MI 48036

DURALOK ATV, RECEPTACLE
38 POSITION, PIN

ATV04-38P*-Sx

A5