
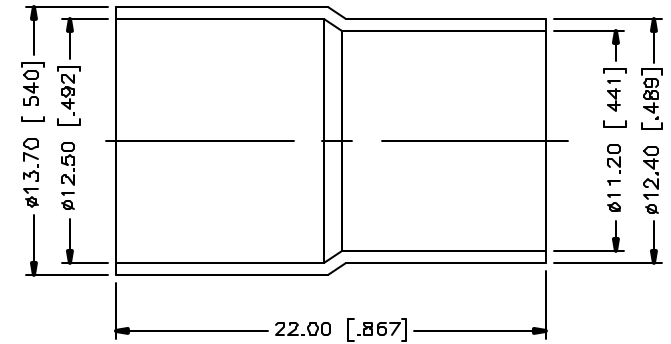
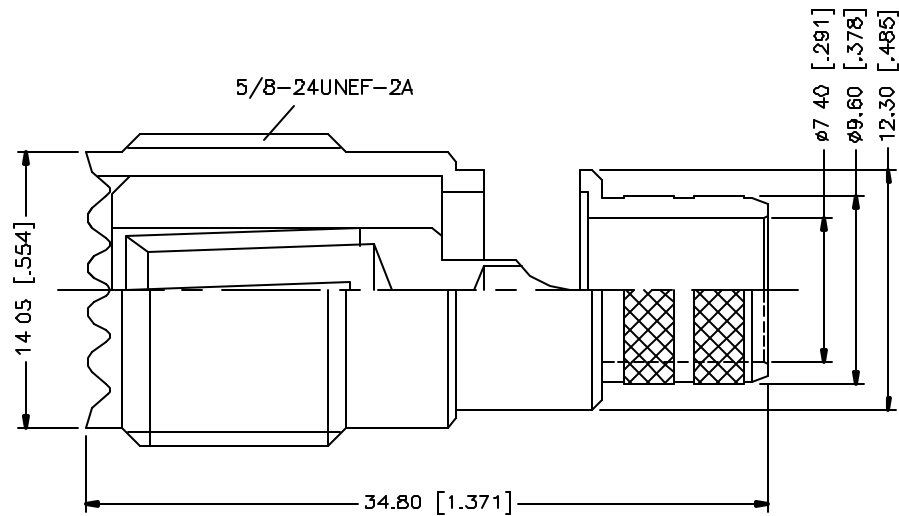


REV.	DATE	DESCRIPTION
NC	01/09/05	INITIAL RELEASE

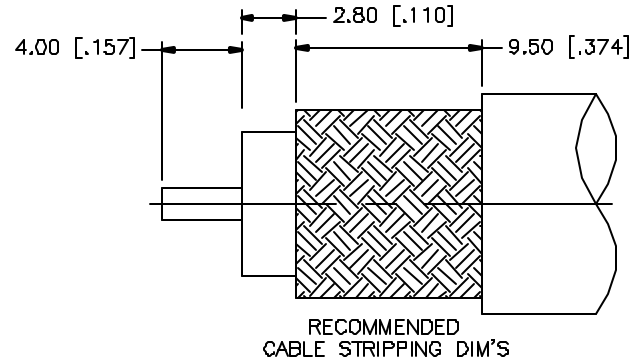

NOTE:

- 1 CRIMPED FERRULE
HEX CRIMP SIZE .429"
2. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex								
8						DRAWN	G.R.S.	01/09/05										
7						CHECKED				PART DESCRIPTION UHF CRIMP JACK (FOR RG-8/U CABLE)								
6						ISSUED												
5						SHEET		1 OF 1		PART NO. 182335								
4	FERRULE	COPPER	NICKEL	1	CAD FILE C:/182/182335.DWG										DWG. NO. 182335.DWG			NC NC
3	CONTACT PIN	BRASS	GOLD	1														
2	INSULATOR	DELRI	NATURAL	1														
1	BODY	BRASS	NICKEL	1														
	DESCRIPTION	MATERIAL	FINISH	QTY														