
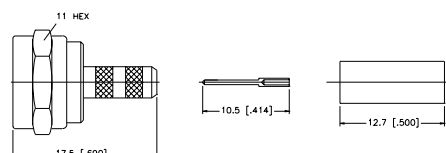


F connectors have been a standard for the CATV industry for over thirty years. Center contacts are available in either gold or tin-lead plating. All dimensions are in millimeters [inches].

Crimp Attachment for Flexible Cable and Direct Solder for Semi-Rigid Cable

Straight Crimp Plug - 3-Piece Crimp - Flexible cable


P.N.	Cable Group	Plt.	Ins.	Imp.	Crimp Tool
F1121A1-002-ND3G-9100-75	Belden 9100	Nickel	Delrin	75	5
F1111A1-002-TTT-6-75	06	Bright Tin	PTFE	75	1 or 2
F1121A3-NT3G-7C-50	07C	Nickel	PTFE	50	6
F1121A1-003-ND3G-8-75	08	Nickel	Delrin	75	5
F1111A1-001-NT3G-16-75	16	Nickel	PTFE	75	3
F1111A1-002-TTT-19-75	19	Bright Tin	PTFE	75	8

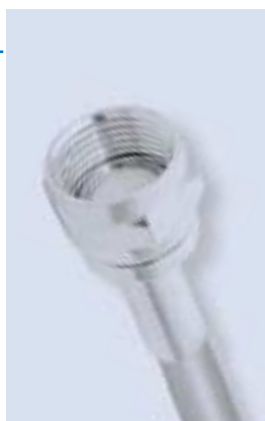

Assembly Instruction J - page 218

Straight Crimp Plug - .085 Semi-Rigid Cable


P.N.	Cable Group	Plt.	Ins.	Imp.	Crimp Tool
F1181A1-TTT-11-50	11	Bright Tin	PTFE	75	N/A

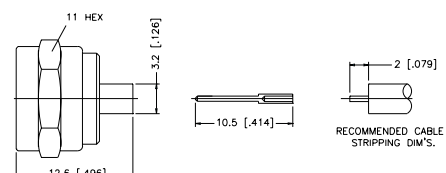

Assembly Instruction E - page 213

Straight Crimp Plug - 1-Piece Crimp - Flexible cable

P.N.	Cable Group	Plt.	Ins.	Imp.	Crimp Tool
F5002-N-3	03	Nickel	N/A	75	5
F5002-N-8	08	Nickel	N/A	75	5
F5002-N-1855A	-	Nickel	N/A	75	.296 hex
Belden 1855A Cable					
F5002I-N-1186A	-	Nickel	N/A	75	.296 hex
Belden 1186A Cable RG59/U Double Braid					

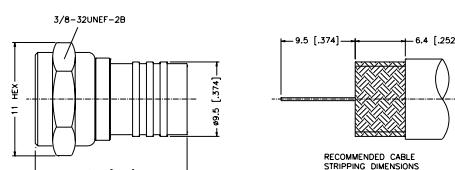

Assembly Instruction W - page 231