



NOTES:

- ELECTRICAL:
 - IMPEDANCE: 50 OHM
 - FREQUENCY RANGE: DC TO 6 GHz
 - VSWR (RETURN LOSS):
 - 1.3 MAX. @ DC TO 3 GHz,
 - 1.4 MAX. @ 3 GHz TO 6 GHz
- MECHANICAL:
 - DURABILITY: TNC, 500 CYCLES MIN.
AMC, 30 CYCLES MIN.
 - TEMPERATURE RANGE: -65°C TO 165°C


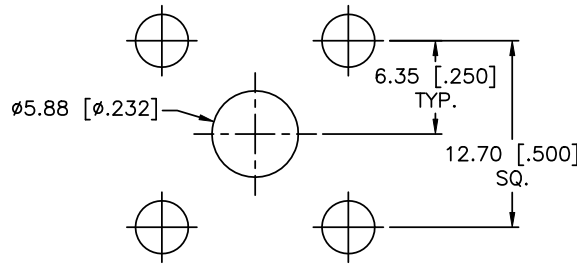


SCALE 0.500

RECOMMENDED
MOUNTING HOLE

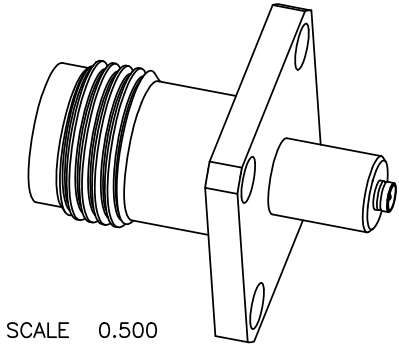

SCALE 0.500

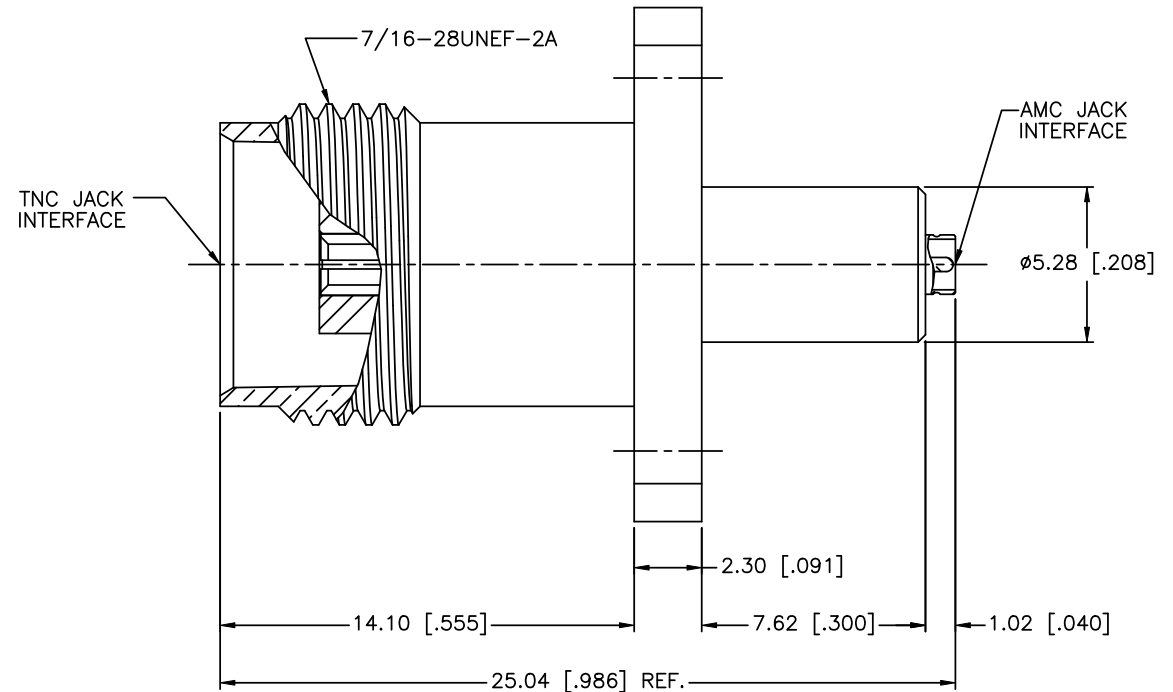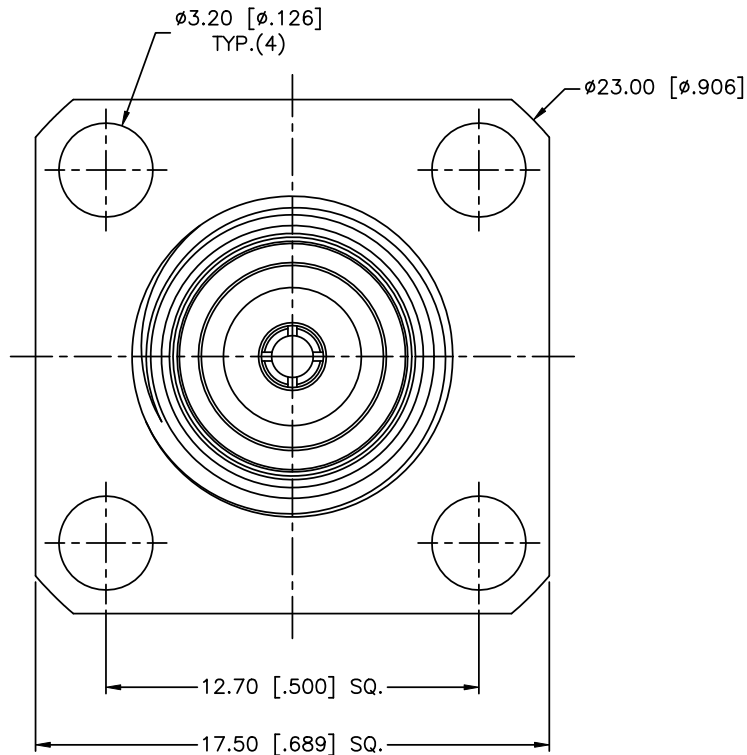

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE
IN MILLIMETERS. DIMENSIONS IN [] ARE IN
INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN T.DENG	01/04/12
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/CONNEX/242259.DWG

Amphenol Connex

PART DESCRIPTION
TNC JACK TO AMC JACK PANEL ADAPTER

PART NO.
242259

DWG. NO. 242259.DWG	REV. NC	SIZE A	SCALE NA
---------------------	---------	--------	----------

4	LOCK RING	BRASS	NEXCOTE	1
3	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	NEXCOTE	1
	DESCRIPTION	MATERIAL	FINISH	QTY